

Датчики приближения

■ Информация для заказа (прямоугольная модель)

P	S		17	-	5	D	N		-																																							
Тип выхода																																																
Напряжение																																																
Размер																																																
Выход																																																
Форма																																																
Тип датчика																																																
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="padding: 2px;">F</td><td>Стандартная модель</td></tr> <tr><td style="padding: 2px;">U</td><td>Модель на измерение разницы частот</td></tr> <tr><td style="padding: 2px;">N</td><td>Стандартная модель</td></tr> <tr><td style="padding: 2px;">N2</td><td>Модель с верхним чувствительным элементом</td></tr> <tr><td style="padding: 2px;">P</td><td>NPN – HO</td></tr> <tr><td style="padding: 2px;">P2</td><td>NPN – H3</td></tr> <tr><td style="padding: 2px;">O</td><td>PNP – HO</td></tr> <tr><td style="padding: 2px;">C</td><td>PNP – H3</td></tr> <tr><td style="padding: 2px;">N3</td><td>Normalno открыты</td></tr> <tr><td style="padding: 2px;">P3</td><td>Normalno закрыты</td></tr> <tr><td style="padding: 2px;">D</td><td>12–24 В= (модель AS: 12–48 В=)</td></tr> <tr><td style="padding: 2px;">A</td><td>100–240 В~</td></tr> <tr><td style="padding: 2px;">Число</td><td>Стандартное расстояние срабатывания (мм)</td></tr> <tr><td style="padding: 2px;">Число</td><td>Длина боковой стороны головки (мм)</td></tr> <tr><td style="padding: 2px;">T</td><td>3-проводная модель постоянного тока, 2-проводная модель переменного тока</td></tr> <tr><td style="padding: 2px;">S</td><td>2-проводная модель постоянного тока</td></tr> <tr><td style="padding: 2px;">SN</td><td>Плоский корпус (литъе под давлением)</td></tr> <tr><td style="padding: 2px;">FI</td><td>Индуктивный датчик приближения</td></tr> <tr><td style="padding: 2px;">A</td><td>Индуктивный датчик приближения с увеличенным расстоянием срабатывания</td></tr> </table>											F	Стандартная модель	U	Модель на измерение разницы частот	N	Стандартная модель	N2	Модель с верхним чувствительным элементом	P	NPN – HO	P2	NPN – H3	O	PNP – HO	C	PNP – H3	N3	Normalno открыты	P3	Normalno закрыты	D	12–24 В= (модель AS: 12–48 В=)	A	100–240 В~	Число	Стандартное расстояние срабатывания (мм)	Число	Длина боковой стороны головки (мм)	T	3-проводная модель постоянного тока, 2-проводная модель переменного тока	S	2-проводная модель постоянного тока	SN	Плоский корпус (литъе под давлением)	FI	Индуктивный датчик приближения	A	Индуктивный датчик приближения с увеличенным расстоянием срабатывания
F	Стандартная модель																																															
U	Модель на измерение разницы частот																																															
N	Стандартная модель																																															
N2	Модель с верхним чувствительным элементом																																															
P	NPN – HO																																															
P2	NPN – H3																																															
O	PNP – HO																																															
C	PNP – H3																																															
N3	Normalno открыты																																															
P3	Normalno закрыты																																															
D	12–24 В= (модель AS: 12–48 В=)																																															
A	100–240 В~																																															
Число	Стандартное расстояние срабатывания (мм)																																															
Число	Длина боковой стороны головки (мм)																																															
T	3-проводная модель постоянного тока, 2-проводная модель переменного тока																																															
S	2-проводная модель постоянного тока																																															
SN	Плоский корпус (литъе под давлением)																																															
FI	Индуктивный датчик приближения																																															
A	Индуктивный датчик приближения с увеличенным расстоянием срабатывания																																															

1) Исполнение на измерение разницы частот возможно только для модели PSN17.

2) Исполнение с верхним чувствительным элементом возможно только для моделей PS12 и PSN17.

3) Нормально открытый и нормально закрытый выходы имеются только у 2-проводных моделей постоянного и переменного тока.


4) Выходы HP + H3 (N3, P3) возможны только для модели AS80.

5) 2-проводная модель постоянного тока — только модель PSN17.

■ Dimensions of square type


Размеры указаны в мм

●PS12-4D□

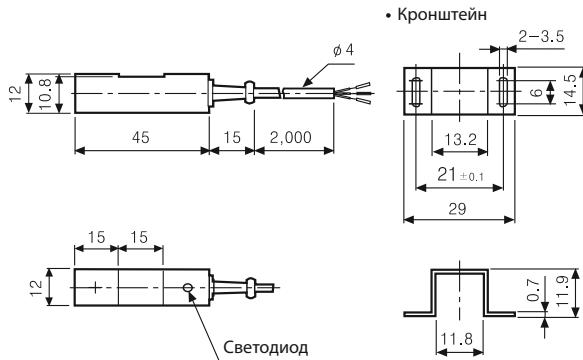


●PSN25-5D□

●PSN25-5A□

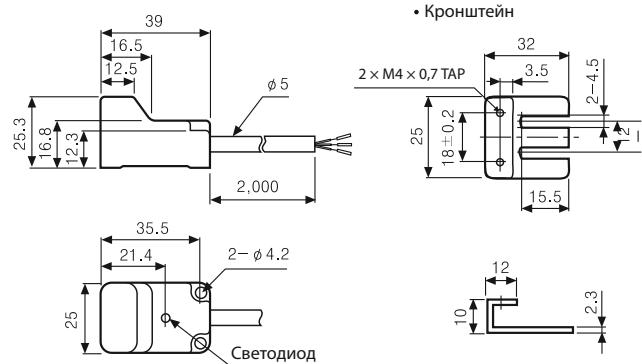


●PSN17-5(8)D□

●PSNT17-5D□

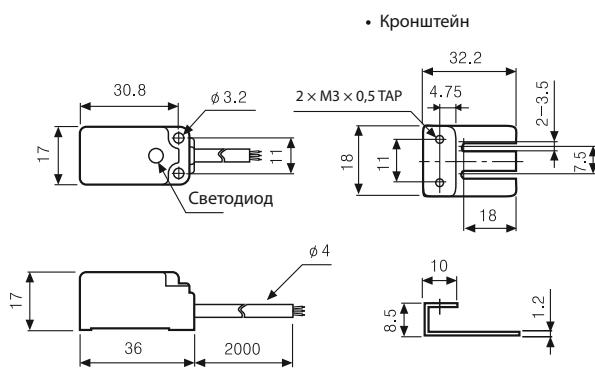

●PSN30-10(15)D□

●PSN30-10(15)A□

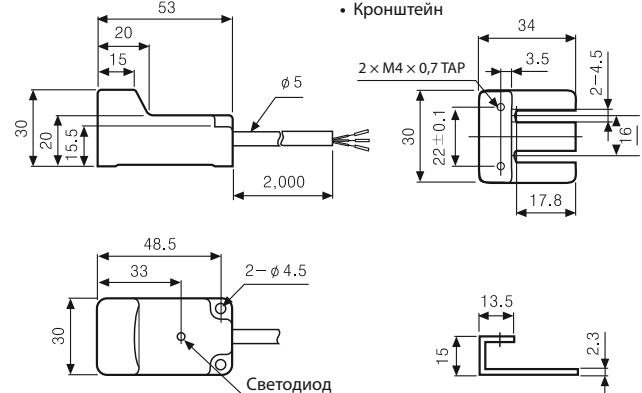


Указатель продукциии

Датчики приближения


■ Размеры для моделей квадратной формы

Размеры указаны в мм


●PS50-30D□

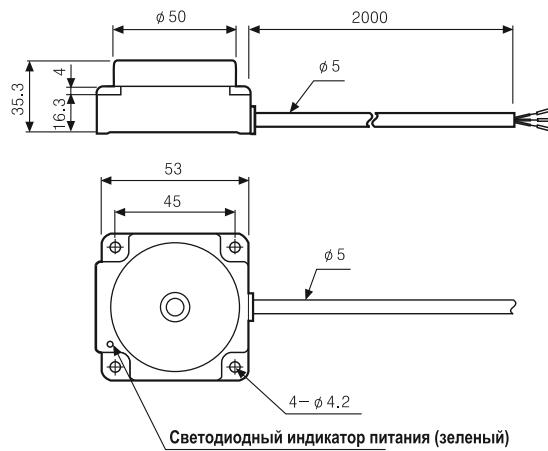


●PS40-20D□

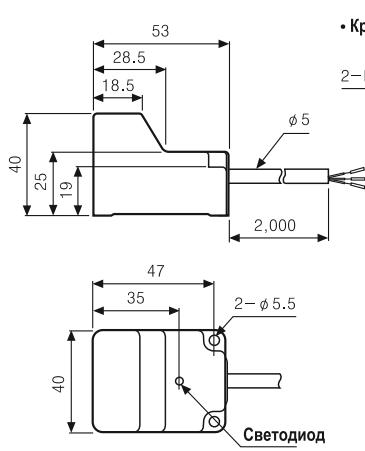


●PSN40-20A□

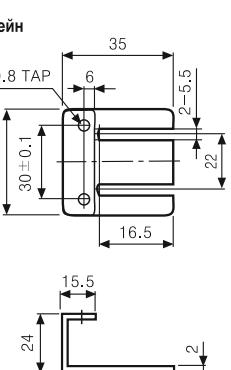


●PFI25-8D□

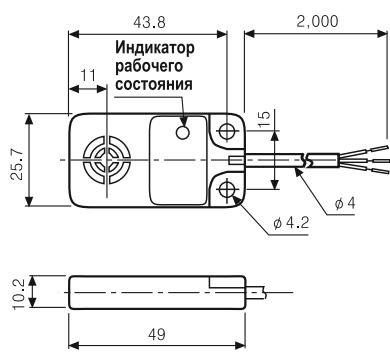

●PFI25-8A□

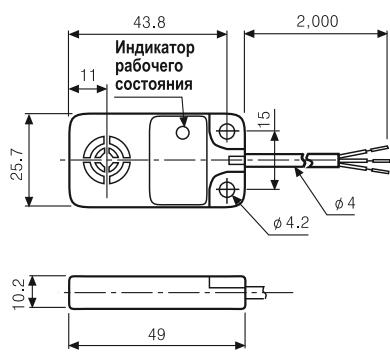

●AS80-50D□

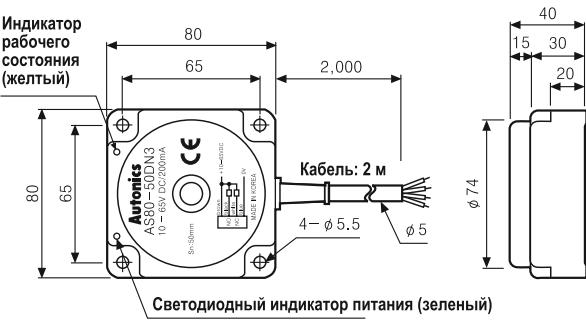

PS/PSN Series


Rectangular type proximity sensor

■ Features

- Improved the noise resistance with dedicated IC
- Built-in reverse polarity protection circuit
(DC 3-wire type)
- Built-in surge protection circuit
- Built-in overcurrent protection circuit(DC type)
- Long life cycle and high reliability
- Red LED status indication
- Protection structure IP67(IEC standard)



Please read "Caution for your safety" in operation manual before using.

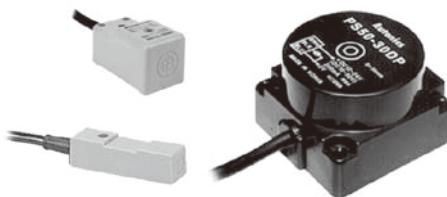

■ Specifications

• DC 2-wire type

※The existing PST17 is upgraded its function and design and changed as PSN17.

※The case color of Normal Close type is changed from orange to gray.

Model	PSNT17-5DO PSNT17-5DC	PSNT17-5DOU PSNT17-5DCU
Sensing distance	5mm	
Hysteresis	Max. 10% of sensing distance	
Standard sensing target	18×18×1mm(Iron)	
Setting distance	0 to 3.5mm	
Power supply (Operating voltage)	12-24VDC (10-30VDC)	
Leakage current	Max. 0.6mA	
Response frequency ^{※1}	700Hz	
Residual voltage	Max. 3.5V	
Affection by Temp.	Max. ±10% for sensing distance at ambient temperature 20°C	
Control output	2 to 100mA	
Insulation resistance	Min. 50MΩ(at 500VDC megger)	
Dielectric strength	1500VAC 50/60Hz for 1 minute	
Vibration	1mm amplitude at frequency of 10 to 55Hz(for 1 min.) in each of X, Y, Z directions for 2 hours	
Shock	500m/s ² (approx. 50G) in each of X, Y, Z directions for 3 times	
Indicator	Operation indicator(red LED)	
Environment	Ambient temperature: -25 to 70°C, storage: -30 to 80°C Ambient humidity: 35 to 95%RH, storage: 35 to 95%RH	
Protection circuit	Surge protection circuit, Overcurrent protection circuit	
Protection	IP67(IEC standard)	
Cable	ø4, 3-wire, 2m (AWG22, Core diameter: 0.08mm, Number of cores: 60, Insulator out diameter: ø1.25)	
Approval	CE	
Unit weight	Approx. 71g	

※1: The response frequency is the average value. The standard sensing target is used and the width is set as 2 times of the standard sensing target, 1/2 of the sensing distance for the distance.

※Environment resistance is rated at no freezing or condensation.

PS/PSN Series

• DC 3-wire type

※The existing PST17 is upgraded its function and design and changed as PSN17.
※The case color of PNP output type is changed from orange to gray.

Model	PS12-4DN PS12-4DP PS12-4DN2 PS12-4DNU PS12-4DPU PS12-4DN2U	PSN17-5DN PSN17-5DP PSN17-5DN2 PSN17-5DP2 PSN17-5DNU PSN17-5DN2U PSN17-5DPU PSN17-5DP2U PSN17-5DN-F	PSN17-8DN PSN17-8DP PSN17-8DN2 PSN17-8DP2 PSN17-8DNU PSN17-8DPU PSN17-8DNU-F PSN17-8DP2U PSN17-8DN2U PSN17-8DNU-F PSN17-8DP2U PSN17-8DP2U-F	PSN17-8DN-F PSN17-8DP-F PSN17-8DN2-F PSN17-8DP2-F PSN17-8DNU-F PSN17-8DPU-F PSN17-8DNU2-F PSN17-8DP2U-F PSN17-8DN2U-F PSN17-8DNU2-F PSN17-8DP2U-F	PSN25-5DN PSN25-5DP PSN25-5DN2 PSN25-5DP2	PSN30-10DN PSN30-10DP PSN30-10DN2 PSN30-10DP2	PSN30-15DN PSN30-15DP PSN30-15DN2 PSN30-15DP2	PSN40-20DN PSN40-20DP PSN40-20DN2 PSN40-20DP2	PS50-30DN PS50-30DP PS50-30DN2 PS50-30DP2															
Sensing distance	4mm		5mm	8mm	5mm		10mm	15mm	20mm	30mm														
Hysteresis	Max. 10% of sensing distance																							
Standard sensing target	12×12×1mm (Iron)	18×18×1mm (Iron)	25×25×1mm(Iron)			30×30×1mm (Iron)	45×45×1mm (Iron)	60×60×1mm (Iron)	90×90×1mm (Iron)															
Setting distance	0 to 2.8mm	0 to 3.5mm	0 to 5mm	0 to 3.5mm		0 to 7mm	0 to 10.5mm	0 to 14mm	0 to 21mm															
Power supply (Operation voltage)	12-24VDC (10-30VDC)																							
Current consumption	Max. 10mA																							
Response frequency ^{※1}	500Hz	700Hz	200Hz	300Hz	250Hz	200Hz	100Hz	50Hz																
Residual voltage	Max. 1.5V																							
Affection by Temp.	Max. ±10% for sensing distance at ambient temperature 20°C																							
Control output	Max. 200mA																							
Insulation resistance	Min. 50MΩ(at 500VDC megger)																							
Dielectric strength	1500VAC 50/60Hz for 1 minute																							
Vibration	1mm amplitude at frequency of 10 to 55Hz(for 1 min.) in each of X, Y, Z directions for 2 hours																							
Shock	500m/s ² (approx. 50G) in each of X, Y, Z directions for 3 times																							
Indicator	Operation indicator(red LED)																							
Environment	Ambient temperature Ambient humidity	-25 to 70°C, storage: -30 to 80°C 35 to 95%RH, storage: 35 to 95%RH																						
Protection circuit	Surge protection circuit, Overcurrent protection circuit, Reverse polarity protection circuit																							
Protection	IP67(IEC standard)																							
Cable	ø4, 3-wire, 2m (AWG22, Core diameter: 0.08mm, Number of cores: 60, Insulator out diameter: ø1.25)																							
Meterial	Case: Heat-resistant ABS, Standard cable(Black): Polyvinyl chloride(PVC).																							
Approval	CE																							
Unit weight	Approx. 62g	Approx. 71g	Approx. 70g	Approx. 111g		Approx. 185g	Approx. 220g																	

• AC 2-wire type

※The case color of Normally Closed type is changed from orange to gray.

Model	PSN25-5AO PSN25-5AC	PSN30-10AO PSN30-10AC	PSN30-15AO PSN30-15AC	PSN40-20AO PSN40-20AC		
Sensing distance	5mm	10mm	15mm	20mm		
Hysteresis	Max. 10% of sensing distance					
Standard sensing target	25×25×1mm(Iron)	30×30×1mm(Iron)	45×45×1mm(Iron)	60×60×1mm(Iron)		
Setting distance	0 to 3.5mm	0 to 7mm	0 to 10.5mm	0 to 14mm		
Power supply(Operating voltage)	100-240VAC(85-264VAC)					
Leakage current	Max. 2.5mA					
Response frequency ^{※1}	20Hz					
Residual voltage	Max. 10V					
Affection by Temp.	Max. ±10% for sensing distance at ambient temperature 20°C					
Control output	5 to 200mA					
Insulation resistance	Min. 50MΩ(at 500VDC megger)					
Dielectric strength	1500VAC 50/60Hz for 1 minute					
Vibration	1mm amplitude at frequency of 10 to 55Hz(for 1 min.) in each of X, Y, Z directions for 2 hours					
Shock	500m/s ² (approx. 50G) in X, Y, Z direction for 3 times					
Indicator	Operation indicator(red LED)					
Environment	Ambient temperature Ambient humidity	-25 to 70°C, storage: -30 to 80°C 35 to 95%RH, storage: 35 to 95%RH				
Protection circuit	Surge protection circuit					
Protection	IP67(IEC standard)					
Cable	ø4, 2-wire, 2m(AWG22, Core diameter: 0.08mm, Number of cores: 60, Insulator out diameter: ø1.25)					
Approval	CE					
Unit weight	Approx. 65g	Approx. 106g	Approx. 152g			



※1: The response frequency is the average value. The standard sensing target is used and the width is set as 2 times of the standard sensing target, 1/2 of the sensing distance for the distance.

※Environment resistance is rated at no freezing or condensation.


PS/PSN Series

□ Control output diagram


◎ DC 3-wire type

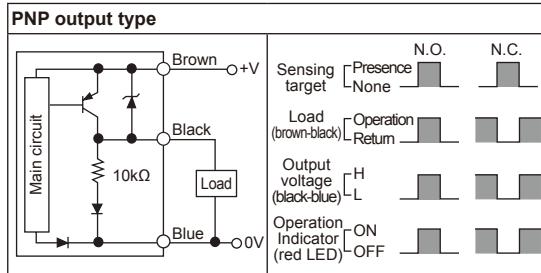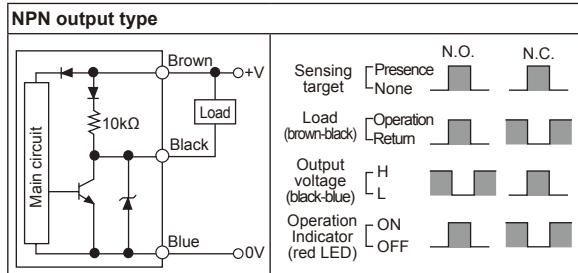

◎ DC 2-wire type

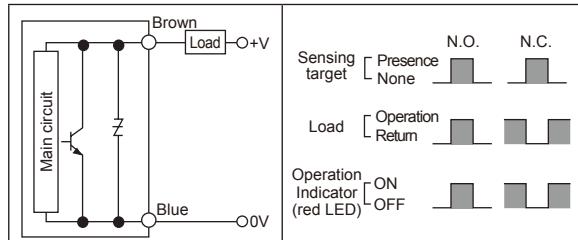


◎ AC 2-wire type

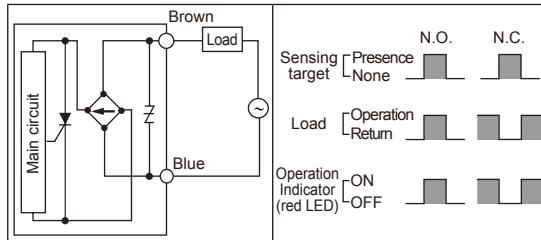


□ Connections

◎ DC 3-wire type

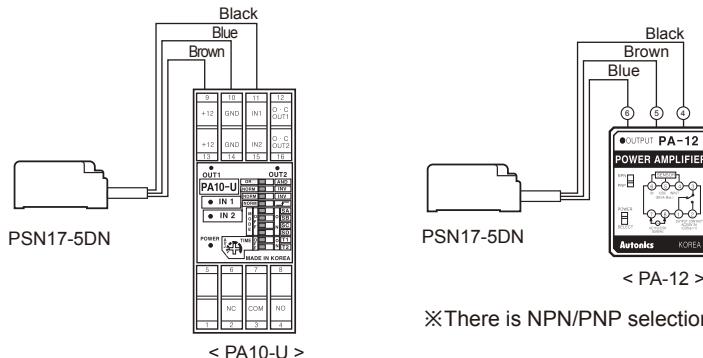


※ There is NPN/PNP selection switch in PA-12.

◎ DC 2-wire type

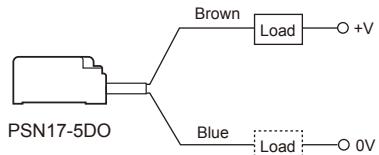

※ The load can be connected to either wire.

◎ AC 2-wire type

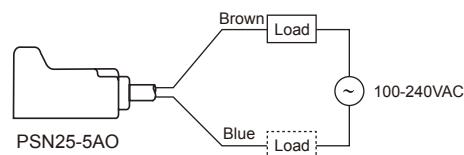


※ The load can be connected to either wire.

Rectangular type

Proper usage


Differential frequency

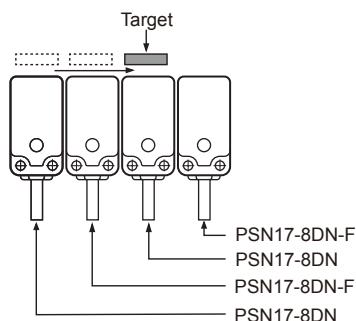


When installing several proximity sensor closely, it may cause malfunction due to mutual interference. Therefore, please use differential frequency for the application
※ Differential frequency type is only for 17 square.

In case of the load current is small

AC 2-wire type

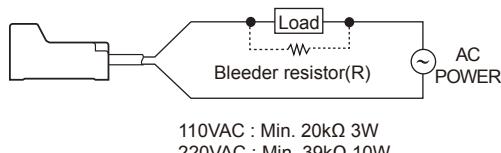


DC 2-wire type



Mutual-interference & Influence by surrounding metals

When several proximity sensors are mounted close to one another a malfunction of the may be caused due to mutual interference. Therefore, be sure to provide a minimum distance between the two sensors as below chart indicates.

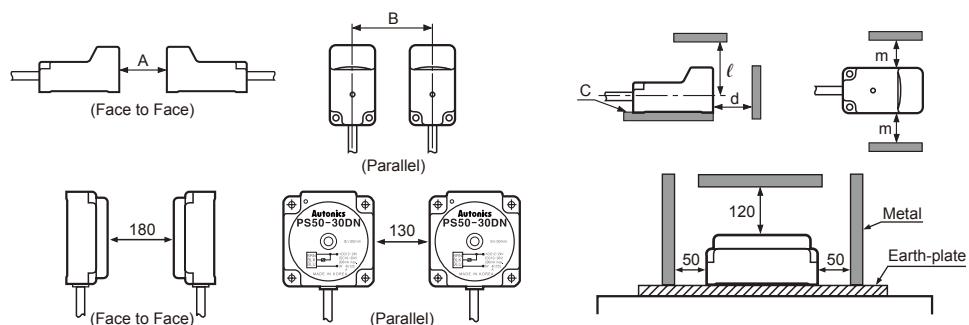

(unit: mm)

Item \ Model	PS12	PSN17 / PSNT17	PSN25	PSN30	PSN40	
Item	Model	PS12	PSN17 / PSNT17	PSN25	PSN30	PSN40
A	4mm	5mm	8mm	5mm	10mm	15mm
B	24	30	48	30	60	90
C	24	36	40	40	50	65
d	12	15	24	15	30	45
e	18	24	33	25	30	45
m	12	18	20	20	25	35

Autonics

www.autonics.ru