

The lamps of the COLOUR MATCH range are specifically designed for evaluating the car body tints/colours. The hi-tech LED recreates the natural light thanks to their very high CRI (Colour Rendering Index). These lamps allow better evaluation of the car body paint's colours. These lamps are available per unit, or in a complete kit.

A RANGE DESIGNED FOR CAR BODY WORKERS...



Ref. 057784

Multimatch is ideal as a general work light and for quality control between various car body operations.

The lamp has a flexible support that allows it to be positioned to the desired angle.

It can be used with a connection cable and a battery.



Ref. 057777

Sunmatch is ideal for inspection during polishing, painting and cleaning operations.

Thanks to its integrated magnet, its swivel hook and the lamp head's flexibility that tilts up to 180 °; Sunmatch can be used in any situation.


The lamp is supplied with a battery and its charger. It has a 4 hour autonomy.

Ref. 057791

- Complete kit featuring all three COLOUR MATCH products.
- Supplied in a custom made carrying case for easy transportation.

Matchpen is ideal for inspection and detection of scratches or scrapes.

Small pen lamp that is easy to carry and keep handy, Matchpen has a very powerful luminous flux which enables excellent colour perception.

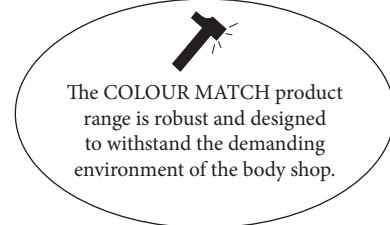

The COLOUR MATCH product range is robust and designed to withstand the demanding environment of the body shop.

AND CHARACTERIZED BY...

- ✓ Outstanding restitution of natural light
- ✓ Improved rendering quality of each operation (painting, polishing ...)
- ✓ Elimination of colour errors, wasted time and rectification costs
- ✓ A LED with a very long lifetime

Characteristics	Products	operating step 1 / step 2	charging	CCT Kelvin	CRI	Lumen		IP	TEMPERATURE	IK	SIZE	Kg
						Lux step 1 / step 2	Lumen step 1 / step 2					
	Matchpen	2h	2h	4000K		300 / 400	100	IP54	10 < 40°C		Ø16x148mm	56 g
	Sunmatch 2	1h / 2h	4h	4500 - 6500K	95	1100 / 550	500 / 250	IP65	- 10 < 40°C	IK07	60x190x40mm	3140 g
	Multimatch 2	1h / 14h	2h			5000	2500 / 250	IP67		IK07	220x83x233 mm	1,85 kg