



WI-PMS310GFR-O
8GE+2SFP 24V Ports
Outdoor Reverse PoE Switch
with
8-Port PoE Datasheet




www.wireless-tek.com

Highlights

- Port1-7 for PoE In, Port 8 for PoE Out, 2SFP Fiber UPLINK PORT
- PoE Output 24V 1A
- IP67 Waterproof box
- Support 24V Passive PoE compliant PSD and PD
- Uplink Port for Gigabit SFP Fiber application
- L2/L3/L4 QoS and IGMP snooping optimize voice and video application
- Support STP/RSTP
- Up to 4K QVLANS simultaneously
- Link Aggregation Control Protocol (LACP)
- WEB/CLI managed modes, SNMP, bring abundant management features



Typical Applications

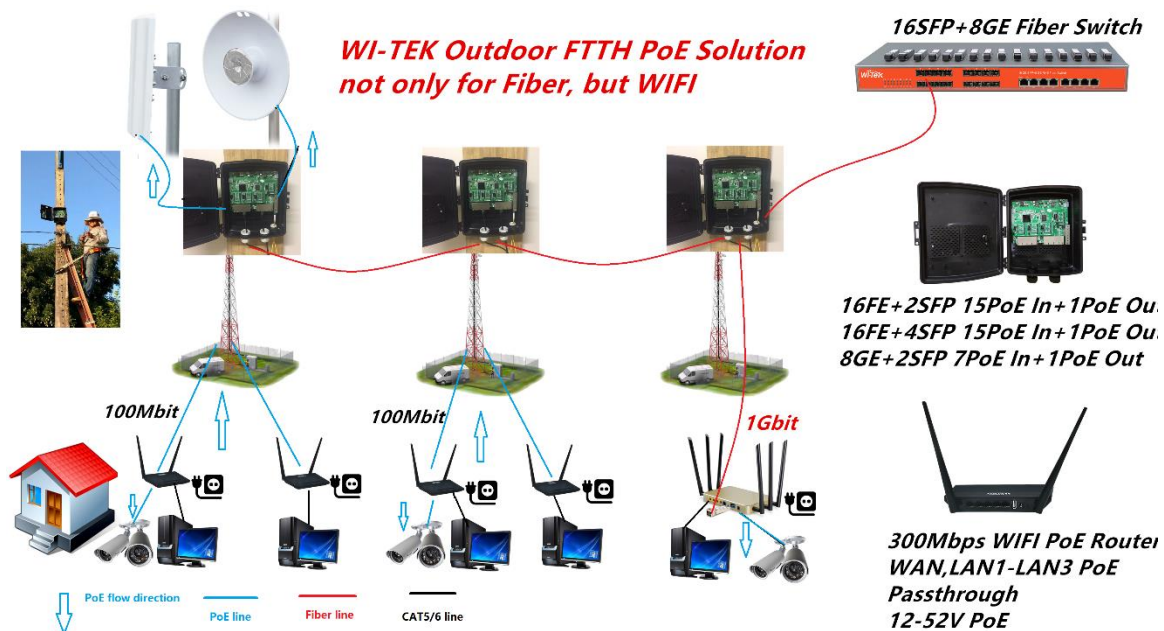

Description

What This Product Does

WI-TEK Reverse PoE Technology has intelligent Power management feature solving a major problem of powering the device for ISPs. This switch can be powered using Remote Power from customer end using specially designed reliable PoE Wireless Router from us or any standard PoE Injector (24V DC, 1A). This eliminates the need to arrange for power at building top and no UPS is needed / no money to be paid to society/power providing customer. This saves lot of MONEY for ISPs and improves service delivery with uninterrupted service to the customer.

How This Product Works

It integrates 2*1000Mbps Gigabit SFP Fiber Ports and 8*100/1000Mbps Gigabit Ethernet network capabilities. Port1-7 for PoE In, Port8 for PoE Out, Support 24V Passive PoE compliant PSD and PD, 2Gigabit SFP can do Uplink Port. 8 Auto-Negotiation RJ45 ports (port-1 to port-7) of the switch support Power over Ethernet (PoE) IN function. These PoE ports (port-1 to port-7) can automatically detect and accept power with those 24v Passive PoE compliant PSE. Then this switch can continue to power up next switch or wireless AP/CPE via PoE output port 8

Easy To Use

WI-PMS310GFR-O is easy to install and use. It requires no configuration and installation. With outstanding performance and quality, the WI- PS310GFR-O is a great

selection for expanding your FTTB(fiber to the building) or FTTW(fiber to the wireless) network.

Advanced QoS features

To integrate voice, data and video service on one network, the switch applies rich QoS policies. Administrator can designate the priority of the traffic based on a variety of means including IP or MAC address, TCP or UDP port number, etc, to ensure that voice and video are always clear, smooth and jitter free.

Abundant Layer 2 features

For more application of layer 2 switches, WI-PMS310GFR-24V supports a complete lineup of layer 2 features, including 802.1Q tag VLAN, Port Isolation, Port Mirroring, STP/RSTP, Link Aggregation Control Protocol and 802.3x Flow Control function. Any more, the switch provides advanced features for network maintenance. Such as Loop Back Detection, Cable Diagnostics and IGMP Snooping. IGMP snooping ensures the switch intelligently forward the multicast stream only to the appropriate subscribers while IGMP throttling & filtering restrict each subscriber on a port level to prevent unauthorized multicast access.

Specifications

HARDWARE FEATURES

Interface	8 RJ45 10/100/1000M ports 2SFP ports
Network Media	10Base-T: Pair 2 Category 3(Cat3) and above UTP/STP(≤150m)

	<p>100Base -TX: Pair 2 Category 5(Cat5) and above UTP/STP(≤150m)</p> <p>1000Base-T: Pair 4 Category 5(Cat5e) and above UTP/STP(≤150m)</p> <p>1000Base-SX:62.5μm/50μm MMF(2m~550m)</p> <p>1000Base-LX:62.5μm/50μm MM(2m~550m) or 10μm SMF(2m~5000m)</p>
Fan Quantity	Fanless
PoE Out	24V 1A
POE Ports(RJ45)	POE in Ports:Port1~7, POE out Port: Port 8
POE pin	4/5+, 7/8-
Exchange Capacity	20G
Mac Address Table	8K
Dimensions	<p>Product Size: 285mm*220mm*45mm (L*W*H)</p>

SOFTWARE FEATURES

Quality of Service	Support 802.1p CoS/DSCP priority Support 4 priority queues Queue scheduling: SP, WRR, SP+WRR Port/Flow- based Rate Limiting
L2 Features	IGMP Snooping V1/V2/V3 802.3ad LACP (Up to 8 aggregation groups, containing 8 ports per group) Spanning Tree STP/RSTP/MSTP Port isolation BPDU filtering/guard TC/Root protect Loop back detection 802.3x Flow Control
VLAN	Supports up to 4K VLANs simultaneously (out of 4K VLAN IDs) Port/ MAC/Protocol-based VLAN Management VLAN configuration
Access Control List	L2~L4 package filtering based on source and destination MAC address, IP address, TCP/UDP ports, 802.1p, DSCP, protocol and VLAN ID; Time Range Based
Security	IP-MAC-Port-VID Binding IEEE 802.1X Port/MAC Based authentication, Radius, Guest VLAN DoS Defence Dynamic ARP inspection (DAI) SSH v1/v2 SSL v2/v3/TLSv1 Port Security Broadcast/Multicast/Unknown-unicast Storm Control

Management	<p>Web-based GUI and CLI management</p> <p>SNMP v1/v2c/v3, compatible with public MIBs DHCP/BOOTP Client, DHCP Snooping, DHCP Option82</p> <p>CPU Monitoring</p> <p>Port Mirroring</p> <p>Time Setting: SNTP</p> <p>Integrated NDP/NTDP feature</p> <p>Firmware Upgrade: TFTP & Web</p> <p>System Diagnose: VCT</p> <p>SYSLOG & Public MIBS</p>
------------	---

OTHERS

Certification	CE, FCC, RoHS
Package Contents	<p>POE Switch</p> <p>Electric Line</p> <p>Guide Book/Warranty Card</p> <p>2L Shape Mount+4 Shim</p>
Environment	<p>Working Temperature: 0°C~40°C</p> <p>Storage temperature : -40°C~70°C</p> <p>Working Humidity : 10%~90% RH non-condensing</p> <p>Storage Humidity: 5%~90% RH non-condensing</p>