


EP-08

Bar clamps 80-100

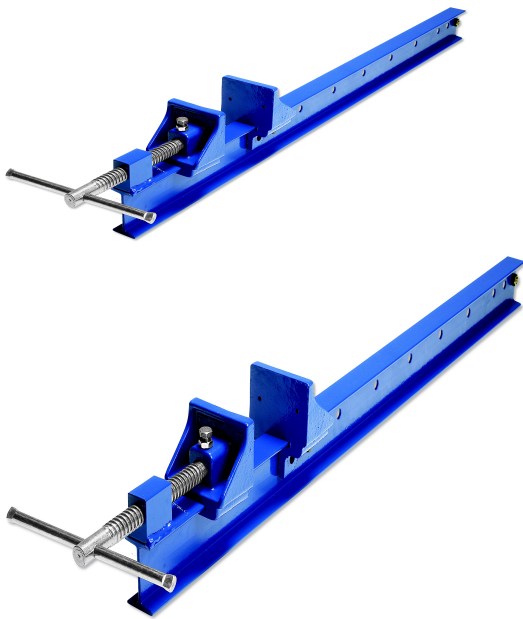

| Mod. 80 | 08100 | 100 cm | 8 cm | 11,5 |
|-----------------|--------------|--------|-------|------|
| | 08125 | 125 cm | 8 cm | 13,0 |
| | 08150 | 150 cm | 8 cm | 14,5 |
| | 08175 | 175 cm | 8 cm | 16,0 |
| | 08200 | 200 cm | 8 cm | 17,5 |
| | 08225 | 225 cm | 8 cm | 19,0 |
| | 08250 | 250 cm | 8 cm | 20,5 |
| | 08275 | 275 cm | 8 cm | 22,0 |
| | 08300 | 300 cm | 8 cm | 23,5 |
| | 08325 | 325 cm | 8 cm | 25,0 |
| 08350 | 350 cm | 8 cm | 26,5 | |
| 08400 | 400 cm | 8 cm | 29,5 | |
| Mod. 100 | 09100 | 100 cm | 10 cm | 16,0 |
| | 09125 | 125 cm | 10 cm | 18,0 |
| | 09150 | 150 cm | 10 cm | 20,0 |
| | 09175 | 175 cm | 10 cm | 22,0 |
| | 09200 | 200 cm | 10 cm | 24,0 |
| | 09225 | 225 cm | 10 cm | 26,0 |
| | 09250 | 250 cm | 10 cm | 28,0 |
| | 09275 | 275 cm | 10 cm | 30,0 |
| | 09300 | 300 cm | 10 cm | 32,0 |
| | 09325 | 325 cm | 10 cm | 34,0 |
| 09350 | 350 cm | 10 cm | 36,0 | |
| 09400 | 400 cm | 10 cm | 40,0 | |

| | |
|-----------------|---|
| Mod. 80 | 80 mm x 42 mm |
| | Fuerza Máxima Maximum pressure ▶ 15000 N |
| Mod. 100 | 100 mm x 50 mm |
| | Fuerza Máxima Maximum pressure ▶ 15000 N |

Main features:

- Steel nut
- Steel double T-section IPN 80/100
- Nodular extra strong cast iron heads
- Steel trapezoidal threaded screw
- Distance between holes—12,5 cm

Materials and Finishing:

All raw materials without exception used in Ind. Piqueras tools come from countries within the European Union. This guarantees maximum quality and permits easy and full control.

| | |
|--------------|--|
| FOUNDRY WORK | *- Nodular cast iron : EN-GJS-400-15 quality under UNE-En 1563 ruling. Stabilising heat treated, shot blasted, phosphated and electrostatic RAL 5010 blue colour epoxy polyester painted |
| SECTION | *80x42 mm Y 100X50mm *Double T-section bar clamp IPN 80/100. Top quality steel S275JR S255J2G3 following UN 36521 and EN10025 rules (resistance 27,5 Kgs/mm ²) *Single anti-rust blue color paint finish (RAL 5010) |
| SCREW | *Screws and cross peg in white zinc coated steel without Hexavalent-Chromium |

Packing and labelling:

Packeting using plastic band and cling film wrapped
Individually coded label EAN-13

RULES:

No special safety rulings applied
All work carried out following ISO:9001 and ISO :14001 rules