


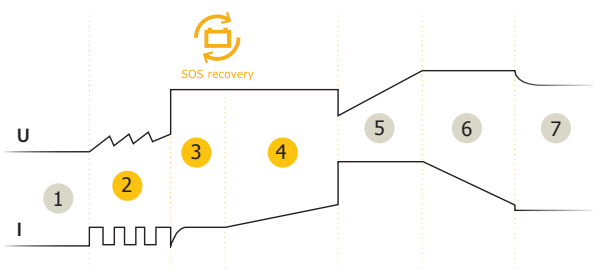
The GYSFLASH 6.24 is specifically designed to charge all types of 6, 12 and 24V batteries such as motorbikes, cars, utility vehicles or vintage cars. It features a 7 step intelligent charging curve for an optimal charge; as well as a specific mode to charge small capacity batteries, up to 15 Ah.

## VERSATILE MULTI-VOLTAGE CHARGER

- **Designed to charge all type of vehicle batteries 6V, 12V and 24V :**
  - 6/12 V : 1.2 Ah to 125 Ah or for maintenance charging up to a 170 Ah.
  - 24 V : 15 Ah to 100 Ah or for maintenance charging up to a 170 Ah.
- **Specific mode SOS :** Designed to safely charge small batteries (< 15 Ah).
- **Cigarette lighter adaptor,** charge the battery by connecting the Gysflash to the cigarette lighter of the vehicle (optional cable).
- **Optimised maintenance charge,** the charger can remain plugged in indefinitely during winter to maintain the health of the battery. «Auto Restart» feature so the charger can restart automatically with the right settings after a power cut.

## HIGH PERFORMANCE CHARGE

- The **7 step charging curve** ensures maximum battery performance and longevity.
- It recovers deeply discharged batteries >2V (*SOS Recovery* ).



- 1 Analysis
- 2 Recovery
- 3 Test
- 4 Desulfation
- 5 Charge
- 6 Absorption
- 7 Maintenance charging (floating)



## SAFETY / PROTECTION FOR VEHICLE ELECTRONICS

- **Protection of the vehicle's on-board electronics:** protection against short circuits, polarity reversal and overcharging. Anti-spark technology.
- **Protection against errors in voltage selection.**
- **Automatic stand-by mode** if the battery is disconnected.
- **Integrated temperature probe** to prevent internal electronics' overheating.
- **Simplified interface** to prevent user error.

## ERGONOMIC

- Ultra-compact design, light and portable.
- Quick / easy to connect waterproof connectors.
- Resistant to dust and water ingress (IP65 - not waterproof).
- Can be attached to a wall.

Supplied with :



Clamps  
(45 cm)



Eyelets - M6  
(45 cm)



Male connector  
(145 cm)

## ACCESSORIES



Extension  
2.5 m - 029057



Cigarette lighter kit  
35 cm - 029439



Charging indicator  
56 cm



M6  
029200



Eyelet connector  
45 cm - M6  
029194

50/60 Hz	⚡	I <sub>charge</sub>	V	Charge	Maintenance	Z <sub>z</sub>	Ondulation/ Ripple	Charging curve	kg	mm	mm	mm	SOS recovery	IP	↔
220-240 V AC	130 W	6 A	6/12 V	1.2 < 125 Ah	1.2 < 170 Ah	<1 Ah/ month	<150 mV Rms	IU <sub>0</sub> U	7 step	0.85	190 x 100 x 52	195 x 365 x 70	Automatic >2V	IP 65	2 m
		4 A	24 V	15 < 100 Ah	15 < 140 Ah										