




TTS

Square Drive Tool

FEATURES

- 180/360-degree multi-position hose couplers prevents hose interference on all jobs
- Made of highest quality materials (aluminum and steel alloys) for durability and longevity
- Manufactured and assembled in the U.S.A. with supreme quality control

SPECIFICATIONS

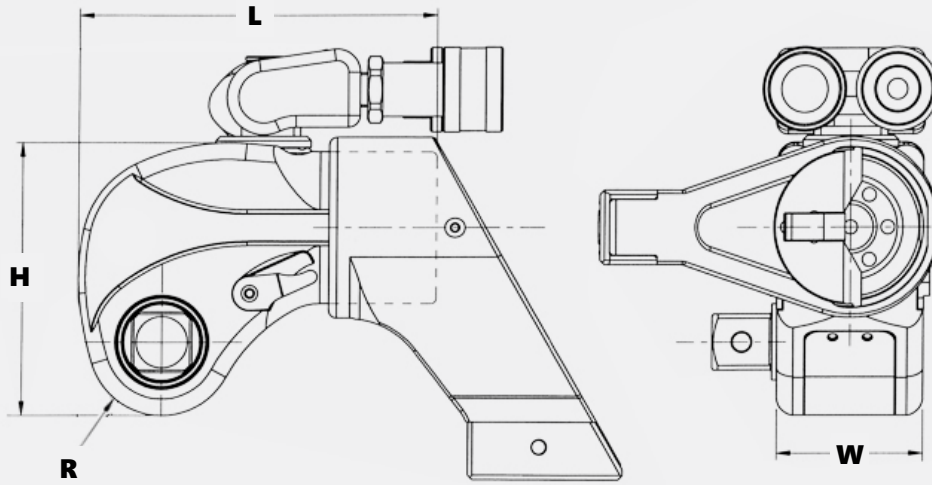

LEGEND: H = HEIGHT L = LENGTH R = RADIUS W = WIDTH

| Model | Units | H | W | L | R | Drive | Weight | Torque | |
|----------|-------|--------|--------|--------|-------|-------|------------|----------------|-----------------|
| | | | | | | | | MIN. | MAX. |
| TTS - .5 | in. | 3.00 | 1.32 | 3.00 | 0.65 | .5 | 1.85 lbs. | 55 ft.-lbs. | 397 ft.-lbs. |
| | mm | 76.20 | 33.53 | 76.20 | 16.51 | 13 | 0.84 kg | 81 Nm | 538 Nm |
| TTS - .7 | in. | 4.25 | 1.62 | 3.96 | .081 | .75 | 2.70 lbs. | 123 ft.-lbs. | 822 ft.-lbs. |
| | mm | 108 | 41 | 101 | 21 | 19 | 1.23 kg | 167 Nm | 1115 Nm |
| TTS - 1 | in. | 4.90 | 1.97 | 4.88 | 0.98 | .75 | 3.95 lbs. | 201 ft.-lbs. | 1,340 ft.-lbs. |
| | mm | 124 | 50 | 124 | 25 | 19 | 1.79 kg | 273 Nm | 1817 Nm |
| TTS - 3 | in. | 6.12 | 2.63 | 6.34 | 1.31 | 1 | 8.30 lbs. | 484 ft.-lbs. | 3,230 ft.-lbs. |
| | mm | 155 | 67 | 161 | 33 | 25 | 3.77 kg | 656 Nm | 4379 Nm |
| TTS - 5 | in. | 7.22 | 3.16 | 7.61 | 1.57 | 1 | 14.20 lbs. | 838 ft.-lbs. | 5,589 ft.-lbs. |
| | mm | 183 | 80 | 193 | 40 | 25 | 6.44 kg | 1136 Nm | 7578 Nm |
| TTS - 8 | in. | 6.50 | 3.57 | 7.70 | 1.76 | 1.5 | 24.95 lbs. | 1,200 ft.-lbs. | 8,000 ft.-lbs. |
| | mm | 165.10 | 90.68 | 195.58 | 44.70 | 38 | 11.34 kg | 1627 Nm | 10846 Nm |
| TTS - 10 | in. | 8.80 | 3.95 | 9.51 | 1.96 | 1.5 | 24.80 lbs. | 1,728 ft.-lbs. | 11,519 ft.-lbs. |
| | mm | 224 | 100 | 242 | 50 | 38 | 11.25 kg | 2343 Nm | 15618 Nm |
| TTS - 15 | in. | 9.67 | 4.38 | 10.55 | 2.18 | 2.5 | 36.00 lbs. | 2,388 ft.-lbs. | 15,920 ft.-lbs. |
| | mm | 246 | 111 | 268 | 55 | 64 | 16.33 kg | 3238 Nm | 21585 Nm |
| TTS - 20 | in. | 10.24 | 4.73 | 11.41 | 2.36 | 2.5 | 43.40 lbs. | 2,964 ft.-lbs. | 19,757 ft.-lbs. |
| | mm | 260 | 120 | 290 | 60 | 64 | 19.69 kg | 4019 Nm | 26787 Nm |
| TTS - 25 | in. | 9.60 | 5.25 | 11.80 | 2.60 | 2.5 | 68.5 lbs. | 3,960 ft.-lbs. | 25,890 ft.-lbs. |
| | mm | 243.84 | 133.35 | 299.72 | 66.04 | 64 | 31.14 kg | 5265 Nm | 35102 Nm |
| TTS - 35 | in. | 12.42 | 5.82 | 14.03 | 2.90 | 2.5 | 77.45 lbs. | 5,564 ft.-lbs. | 37,095 ft.-lbs. |
| | mm | 315 | 148 | 356 | 74 | 64 | 35.13 kg | 7544 Nm | 50294 Nm |
| TTS - 50 | in. | 11.00 | 6.57 | 15.50 | 3.25 | 2.5 | 124 lbs. | 7,875 ft.-lbs. | 52,500 ft.-lbs. |
| | mm | 279.40 | 166.88 | 393.70 | 82.55 | 64 | 56.36 kg | 10677 Nm | 71180 Nm |

NOTE:

All tools and pumps are subject to a 13-months free repair/replacement guaranty in the event of failure. Data subject to change without notice.