

# iPECS

## *UCS*

*(Unified Communications Solution)*

## Server



Installation & Administration Guide





## Revision History

Issue 1.0	Feb/07/2007	Initial release
Issue 2.0	Jul/08/2008	Update for new GUI and features
Issue 2.5	Aug/09/2009	Update for new release and added MS Vista-related content
Issue 2.6	Jan/10/2010	Update for Web Link/Multi Web Link and User Feature Restriction
Issue 2.6	Mar/31/2010	Update for Distributed Server Operation and Configuration
Issue 2.6	Jul/06/2010	Update for LG-Ericsson Launching
Issue 2.6	Nov/29/2010	Update for the configuration of iPECS-MG
Issue 2.7	Dec/26/2011	Update for Data Backup, Shared Directory, Auto Presence Registration and Different Network Interface
Issue 3.0	Jan/17/2012	Update for UAC and User Restriction
Issue 3.0	Feb/23/2012	Update for Email Dispatch, Email Dispatch Result, User Security Property, Version compatibility, Property
Issue 3.0	Jul/13/2012	Added Audio Setting By Mobile User, Audio Setting By Mobile Phone. Mobile License information is displayed in PBX Status. Outlook Plug-in, Jabra PC suite and Plantronics packages can be downloaded from UCS Web Server.
Issue 3.0	Aug/15/2012	Added On Demand Database Backup in the Database Backup Setting.
Issue 3.0	Sep/03/2012	Corporate Identify Changed to Ericsson-LG

**Copyright© 2012 Ericsson-LG Co., Ltd. All Rights Reserved**

*This material is copyrighted by Ericsson-LG Co., Ltd. Any unauthorized reproductions, use or disclosure of this material, or any part thereof, is strictly prohibited and is a violation of Copyright Laws. Ericsson-LG reserves the right to make changes in specifications at any time without notice. The information furnished by Ericsson-LG in this material is believed to be accurate and reliable, but is not warranted to be true in all cases. Ericsson-LG and iPECS are trademarks of Ericsson-LG Co., Ltd.*

*All other brand and product names are trademarks or registered trademarks of their respective companies.*

## Table of Contents

1.	Introduction .....	4
2.	Installation and Setup .....	5
2.1	Server Requirements .....	5
2.2	iPECS System Set-up License and Lock key .....	6
2.2.1	License & Lock-key Installation .....	6
2.2.2	iPECS System Database Set-up.....	6
2.3	UCS Installation and Setup .....	7
2.3.1	Verify IIS Install .....	7
2.3.2	.NET Framework .....	9
2.3.3	UCS Server .....	10
2.3.4	UCS Web Admin Installation .....	14
2.3.5	Setup the Web Server Local Path .....	16
3.	Configuring iPECS UCS .....	17
4.	Launching iPECS UCS Server .....	18
4.1	Starting UCS Server.....	18
4.2	UCS Server Manager Main Menu .....	19
4.2.1	System Menu .....	19
4.2.2	Process Menu.....	20
4.2.3	Help Menu .....	20
4.3	Server Manager Popup Menu .....	20
4.3.1	Server Configuration .....	21
4.3.2	Trace Configuration.....	22
5.	UCS OMS.....	23
5.1	Introduction.....	23
5.2	UCS OMS Access .....	23
5.3	UCS OMS Operation .....	23
5.3.1	UCS OMS Settings .....	24
5.3.1.1	General .....	24
5.3.1.2	Update Interval .....	24
5.3.1.3	Client Status Column View.....	25
5.3.1.4	System Status Screen View.....	25
5.3.2	Log Messages .....	26
5.3.3	Log Message History.....	26

5.3.4	UCS Client Status .....	27
5.3.5	UCS Server Status .....	29
5.3.6	iPECS System Status .....	30
<b>6.</b>	<b>UCS Web Admin .....</b>	<b>31</b>
6.1	UCS Web Admin Access.....	31
6.2	UCS Web Admin Operation.....	31
6.2.1	Admin Password.....	32
6.2.2	Admin Message .....	33
6.2.3	Database Backup Setting.....	34
6.2.4	E-mail Dispatch .....	36
6.2.5	Organization .....	37
6.2.6	Shared Directory .....	39
6.2.7	Changeable Fields Setting .....	43
6.2.8	Presence Registration .....	44
6.2.9	E-mail Dispatch Result.....	45
6.2.10	User Security Property.....	45
6.2.11	UCS Serviced iPECS Systems .....	46
6.2.12	LDAP Server .....	48
6.2.13	Schedule Administrators.....	48
6.2.14	Shared Schedule .....	50
6.2.15	Properties .....	51
6.2.16	SIP Parameter .....	54
6.2.17	Timer Settings.....	57
6.2.18	Message Log.....	57
6.2.19	Admin Level.....	58
6.2.20	Admin Users .....	59
6.2.21	User Password Initialize .....	60
6.2.22	Client Version Compatibility .....	60
6.2.23	ICR Time Option .....	61
6.2.24	ICR Holiday Assignment.....	62
6.2.25	Audio Setting By Mobile User .....	62
6.2.26	Audio Setting By Mobile Phone.....	63
6.2.27	Web Link .....	63
6.2.28	Multi Web Link.....	64
6.2.29	User Feature Restriction .....	66
6.2.30	Restriction Template.....	69
6.2.31	Status .....	70
6.2.31.1	Client Status .....	70
6.2.31.2	Server Status .....	71

6.2.31.3	<i>PBX Status</i> .....	72
6.2.31.4	<i>Current Login User List</i> .....	72
6.2.31.5	<i>Call Connection Status</i> .....	73
6.2.32	<b>Report</b> .....	74
6.2.32.1	<i>Notice Logs</i> .....	74
6.2.32.2	<i>Warning Logs</i> .....	75
6.2.32.3	<i>Call Logs</i> .....	76
6.2.32.4	<i>Usage Logs</i> .....	76
6.2.32.5	<i>File Send Logs</i> .....	77
6.2.32.6	<i>Presence Member</i> .....	77
6.2.32.7	<i>ICR Scenario Resource</i> .....	78
6.2.32.8	<i>Unread Note</i> .....	78
6.2.32.9	<i>Private Schedule</i> .....	79
6.2.32.10	<i>SIP Stack Resource Usage</i> .....	79
6.2.32.11	<i>Warning Statistics</i> .....	81
6.2.32.12	<i>Call Statistics</i> .....	84
6.2.32.13	<i>Feature Usage Statistics</i> .....	86
6.2.32.14	<i>ICR Result Statistics</i> .....	87
6.2.32.15	<i>Login Count Statistics</i> .....	88
6.2.33	<b>Download Client Program</b> .....	90
<b>7.</b>	<b>Trouble Shooting</b> .....	<b>91</b>
7.1	<b>Windows Firewall Settings</b> .....	<b>91</b>
7.2	<b>External Firewall Settings</b> .....	<b>93</b>
7.3	<b>Different Network Interface Card for PBX connection</b> .....	<b>93</b>


## 1. Introduction

*iPECS Unified Communications Solution (UCS)* is a powerful suite of communication applications and tools designed to seamlessly link multiple devices and applications. The system architecture illustrated below displays the three components of *iPECS UCS*, the *UCS Server*, the *UCS Clients* and the *iPECS* system, all connected over an IP network. Working with the *iPECS* system, *iPECS UCS* simplifies human interaction and increases productivity allowing employees to access information and business tools using any device, regardless of location. *iPECS UCS Server* integrates communications applications including Instant Messaging and Presence indicator as well as real-time voice, video and file sharing with tools including Call Recording, Individual Customized Call Routing, Shared and Private contact directories and Schedule Management.

*UCS Server* operates using Microsoft Windows operating systems, see section 2.1. *UCS Server* also requires WinPcap to assist in packet capture and postgresQL as the database manager. *iPECS UCS Server* is comprised of several servers including the:

- Gateway Server — for Registration, Proxy and TCP Relay services
- Database Server — for database management services
- Application Server — for IM Chat, Schedule, Directory, History, ICR and diagnostic services

On the desktop, the *iPECS UCS Client* employs a user console allowing access to the various applications and tools via a single, easily understood GUI. *UCS Server* manages unified communication sessions for *UCS Clients*, linking to the *iPECS* system for phone status information and call handling. *UCS Clients* can be in any network domain with encrypted communication between *UCS Clients* and *UCS Server* for security.

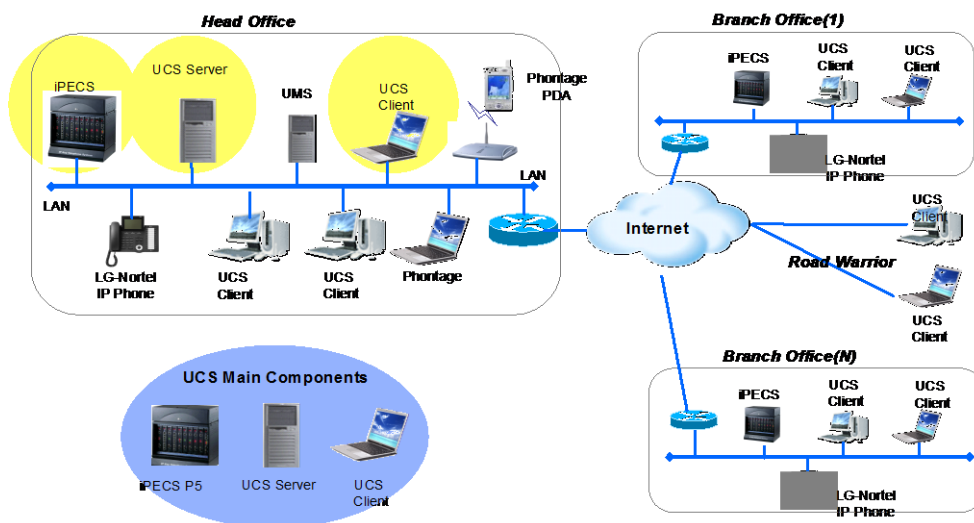

**UCS System Diagram**

## 2. Installation and Setup

---

Installation and set-up of the *iPECS UCS Server* is a multi-step process:

- Insure compatibility, Section 2.1
- Install the *iPECS* system lock key, and set up system for *UCS*, Section 2.2
- Verify IIS install, Section 2.3.1
- Verify .NET install, Section 2.3.2
- Install *UCS Server*, Section 2.3.3
- Install *UCS Web Admin* server, Section 2.3.4
- Basic *UCS* set-up, Section 2.3.5.

Installation of the *iPECS* lock key and set-up is discussed in Section 2.2 and will require assistance of the *iPECS* system administrator.

Typical installation of the *iPECS UCS Server*, postgresQL DBMS and *iPECS UCS Admin Server* requires at least 1 Giga byte of free hard drive space, and takes about 20 minutes to perform. Installation may require that you have Administrative rights for the server platform where *iPECS UCS* is to be installed. Prior to installation, the server and operating system should be verified for compatibility with the *iPECS UCS* application. Assure that the PC and OS (Operating System) comply with the minimum requirements of Section 2.1. Also, assure the *iPECS* system employs version 5 or higher.

### 2.1 Server Requirements

---

The minimum requirements for the *iPECS UCS Server* PC is described below.

- CPU: Pentium Core2 Duo 3.0GHz
- Memory: 2 Giga Bytes RAM
- Hard Disk: Minimum 1 Giga Byte free space
- NIC : 100 Base-T or faster

*iPECS UCS Server* can run using the Microsoft Operating Systems below including 32/64bits:

- Microsoft Windows 2008/2003 Server
- Microsoft Windows 7 Edition Professional/Enterprise/Ultimate
- Microsoft Windows Vista Business/Enterprise/Ultimate Edition
- Microsoft Windows XP Professional



**General Limitations:**

- All *iPECS* devices register to the *iPECS* system using a MAC address and IP address.
- If postgresQL is installed in the server PC, it must be uninstalled before installing the *UCS server* application package. Use the Add/Remove Programs in Control Panel to uninstall postgresQL.
- User Access Control (UAC) in Windows Vista, Windows 7 and Windows 2008 Server must be temporarily disabled to install the *UCS Server* and *UCS Web Admin*.
- Windows XP, Windows Vista and Windows 7 are limited to 10 simultaneous network connections. For additional concurrent web connections you need to use server class editions of Windows.

---

## 2.2 iPECS System Set-up License and Lock key

---

### 2.2.1 License & Lock-key Installation

---

*iPECS UCS* employs a concurrent-use or floating license, which is managed by each serviced *iPECS* system. This license establishes the number of simultaneous active (logged-in) users. The license is installed as a lock-key in the appropriate *iPECS* systems serving the *UCS Clients*. The installer of the *iPECS* systems must install the lock-key prior to installation of *iPECS UCS*. Detailed instructions for installation of the lock-key are available from your Ericsson-Ig authorized distributor.

### 2.2.2 iPECS System Database Set-up

---

For proper operation and registration of the *UCS Server* with *iPECS*, the *iPECS* system database must be properly configured as follows:

#### *iPECS-Lik*

- MAC address of the *UCS Server* platform must be defined in the *iPECS* system Admin PGM code 235 or the Remote Phone and CO Gateway Registration table. The MAC address of the server can be determined using the “ipconfig” command at the C: prompt.
- *iPECS* must be configured with a *UCS* Station group in Admin Programming code 190
- *UCS* Station group must be assigned an Attribute Value of 1 in Admin Programming code 191.

#### *iPECS-MG*

- The IP address of *UCS Server* must be configured at UC Server IP Address in Admin Programming code 223.

For details, refer to the *iPECS Admin and Maintenance Manual* or the *iPECS* System Administrator.

## **2.3 UCS Installation and Setup**

---

This section explains how to install the *iPECS UCS Server* and supporting applications. It is also necessary that the Windows component IIS (Internet Information Service) and Microsoft .NET Framework 2.0 or above version be installed prior to beginning installation, see Sections 2.3.1 and 2.3.2.

**NOTE:** You have to install UCS server application package first. After that you have to install UCS web admin package. It is required to keep the installation order of UCS packages.

**NOTE:** Please verify if UAC (User Account Control) is temporally turned off for Windows Vista and Windows 7.

To change the UAC on Windows Vista :

1. Click on Start
2. Select Control Panel
3. Click on User Account
4. Turn User Account Off and Save
5. A PC Restart is required

To change the UAC on Windows 7 :

1. Click on Start
2. Select Control Panel
3. Select Change User Account Control Settings
4. Change to Never Notify and Save
5. A PC Restart is required

### **2.3.1 Verify IIS Install**

---

The Internet Information Services (IIS) Windows component is required for proper operation of the *iPECS UCS Web Admin Server*.

#### **Windows 2008 Server**

The following steps will ensure required IIS components are installed:

1. Run Start Menu -> All Programs -> Administrative Tools -> Server Manager.
2. Verify role 'Web Server (IIS)' is installed. If it's not, click Add Roles and add this role.
3. Expand 'Web Server (IIS)' role.

4. Click 'Add Role Services' and add the required role services.
  - Web Server – Application Development – .NET Extensibility
  - Web Server – Application Development – ASP .NET
  - Web Server – Application Development – ISAPI Extensions
  - Web Server – Application Development – ISAPI Filters
  - Web Server – Management Tools – IIS6 Management Compatibility – IIS Metabase Compatibility
  - Web Server – Management Tools – IIS6 Management Compatibility – IIS 6 WMI Compatibility
  - Web Server – Management Tools – IIS6 Management Compatibility – IIS 6 Scripting Tools
5. Click Next, and then click Install.
6. When installation is complete, close the wizard.

### ***Windows Vista & Windows 7***

Please note that not all editions of Windows Vista and Windows 7 have the Internet Information Services functionality.

To install IIS, perform these steps:

1. First go to the Control Panel and select Programs and Features.
2. From there, select Turn Windows features on or off"
3. Expand the Internet Information Services node, and then the Web Management Tools and then the IIS 6 Management Compatibility.
4. Turn on these options on IIS.
  - Internet Information Services – World Wide Web Services – Application Development Features – .NET Extensibility
  - Internet Information Services – World Wide Web Services – Application Development Features – ASP .NET
  - Internet Information Services – World Wide Web Services – Application Development Features Web Server – Application Development – ISAPI Extensions
  - Internet Information Services – World Wide Web Services – Application Development Features Web Server – Application Development – ISAPI Filters
  - Internet Information Services – Web Management Tools – IIS6 Management Compatibility – IIS Metabase Compatibility
  - Internet Information Services – Web Management Tools – IIS6 Management Compatibility – IIS 6 WMI Compatibility
  - Internet Information Services – Web Management Tools – IIS6 Management Compatibility – IIS 6 Scripting Tools
5. Click OK.

### ***Windows 2003 Server***

To help minimize the attack surface of the server, IIS 6.0 is not installed on Windows Server 2003 by default. To install IIS, perform the following steps:

1. Click Start>Control Panel and Add or Remove Programs.
2. Click the Add/Remove Windows Components button in Add or Remove Programs.
3. On the Windows Components window, click on the Application Server entry and click the Details button.
4. On the Application Server page, verify IIS is checked. If it is not, click on the IIS check box.
5. Click OK on the Application Server dialog box.
6. Click Next on the Windows Components dialog box, then IIS Server Installation in progress.
7. Click Finish on the Completing the Windows Components Wizard page.

**NOTE:** Please follow the instruction below just in case the IIS service is abnormal in the Windows 2003 Server.

- Open the Internet Information Service(IIS) Manager from the Control Panel then go to the Web Service Extension folder
  - ✓ Please click Allow for the ASP.NET v2.xx. By default it is prohibited. Applying this procedure, please check IIS Service again.
- In case the procedure above does not take effect, run the command below from the MS dos command in order to reinstall ASP.NET and update all of scripser files, scripser map. Then start the IIS Service again by clicking the Start button from the basic web site menu after stopping the IIS Service first.
  - `C:\Windows\Microsoft.NET\Framework\v2.0.50727\aspnet_regiis -i`

### **Windows XP**

The Internet Information Server (IIS) is not installed by default with a standard Windows XP Pro installation. To install IIS, perform the following steps:

1. From the Windows Control Panel, select Add/Del Program then click on Add/Delete Windows Component.
2. At the Windows Component Wizard screen (shown), verify IIS is checked. If it is not, click on the IIS check box.
3. Click Next to complete installation.

**NOTE:** This may require the original Windows CD when prompted to install IIS.

### **2.3.2 .NET Framework**

---

Microsoft's .NET Framework 2.0 or above version must be installed on the server PC for proper operation. Verify that the .NET Framework 2.0 or above version is installed. Windows 7 comes with .NET Framework 3.5 installed.

### **Windows Server 2008**

The following steps will ensure required .NET Framework components are installed.

1. Run Start Menu -> All Programs -> Administrative Tools -> Server Manager.
2. In the Features section of the Server Manager home page, make sure '.NET Framework' is installed. If it is not installed, click Add Features and add this feature.
3. Click Next, and then click Install.
4. When installation is complete, close the wizard.

### **Windows Vista & Windows 7**

To install .NET Framework, perform these steps:

1. Access the Control Panel and select Programs and Features.
2. To access the Windows features screen, click on the option labeled 'Turn Windows features on or off.'
3. The Windows Feature List window will open displaying all the Features available for your version of Windows Vista & Windows 7.
4. At the Windows Features screen (shown), verify '.NET Framework' is checked. If it is not, click on the .NET Framework check box.
5. Click OK.

### **Windows 2003 Server & Windows XP**

1. Verify that the .NET Framework is installed by checking in the Add/Remove Programs list in the Control Panel. If the .NET Framework is not listed, insert the iPECS UCS CD ROM into the PC CD-ROM drive.
2. In the iPECS UCS CD-ROM directory, open the Web Admin folder and select the dotnetfx2(x86).exe file. This will install the .NET Framework 2.0.

**NOTE:** Download and install the 64-bit support .Net Framework version 2.0 redistributable package when the server PC is 64-bit platform.

#### 2.3.3 UCS Server


---

The *iPECS UCS* CD-ROM contains the installation programs for the *UCS Server* application, PostgreSQL DBMS, WinPcap, and *UCS Web Admin Server*.


To install the *UCS Server* application:

1. Insert the *iPECS UCS* CD ROM into the PC CD-ROM drive; the *UCS Server* Install Wizard should appear. If not, browse the main directory of the CD for and run "Setup.exe" to start the Installer.

2. In the Install Wizard screen, click Next.

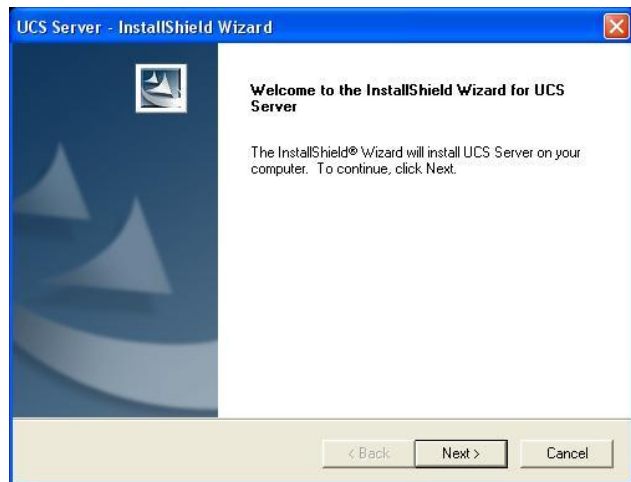


3. The Software License Agreement window appears. Read and accept the license terms and click Next.

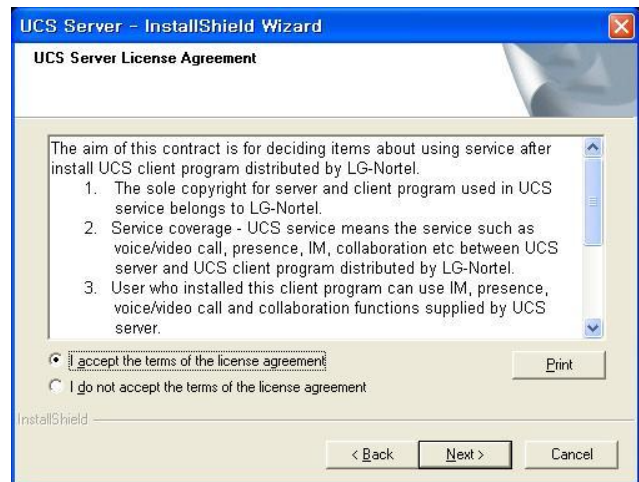


4. In the Customer Information window, enter a user and company name, and click Next.



5. Select a Setup Type; Typical is recommended.

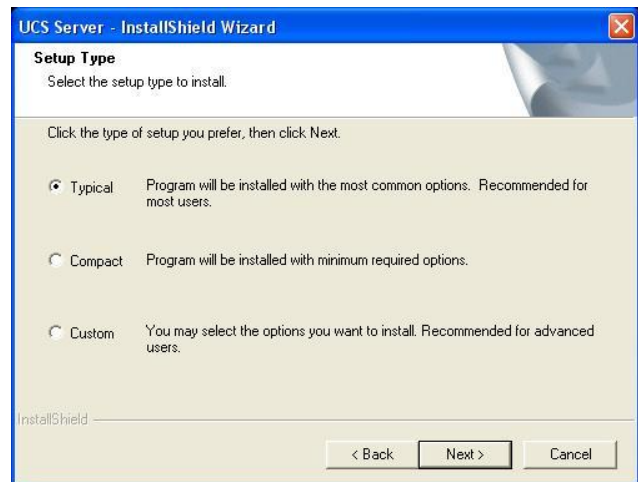


6. In the Destination Location window, you may either accept the default destination (C:\Program Files\UCS Server), which is recommended, or use Browse to locate a different directory or specify a directory.

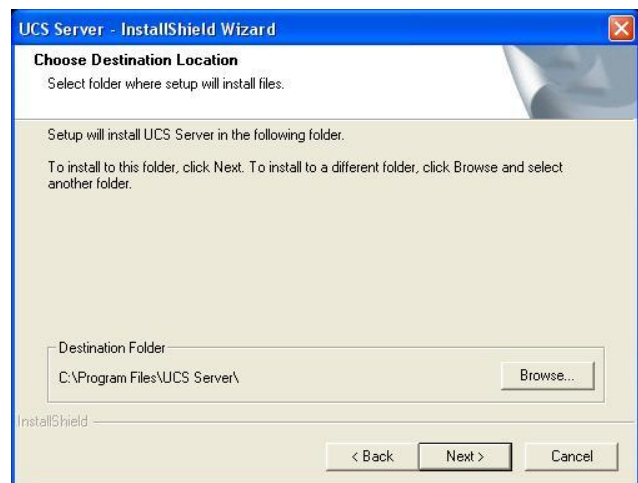

**NOTE:** When specifying a directory, do not include spaces or special characters.


7. Click Next; all elements and documentation are installed.

8. Click Finish to close the InstallShield Wizard.

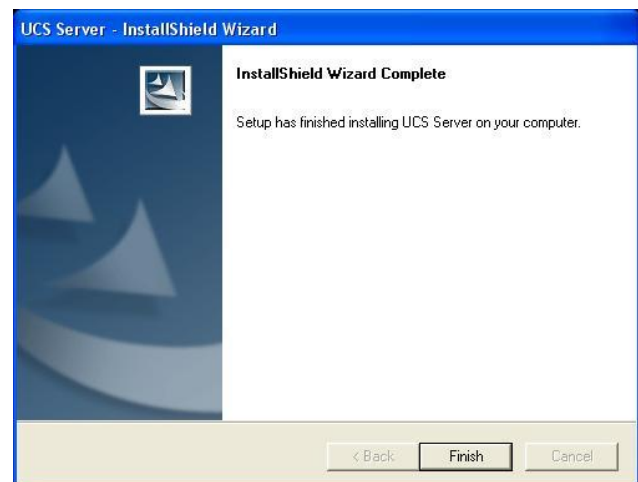

**postgreSQL Installation**

*iPECS UCS* employs an object-relational database management system (postgreSQL) from the University of California at Berkeley as the database manager. Typically, 200 MB of free hard-drive space is required. The database space requirements will grow as the various *iPECS UCS* databases are populated. Be sure to plan-ahead for the amount of data you will be storing.

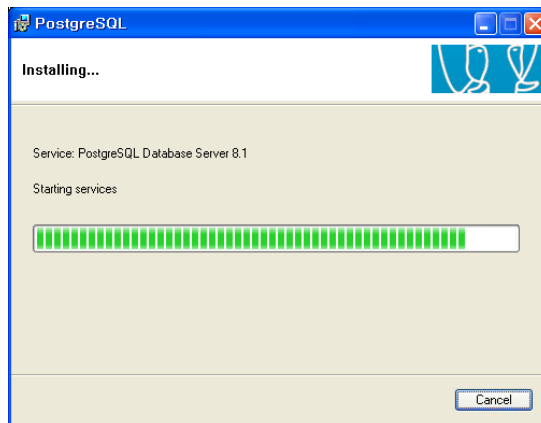


**NOTE:** Trying to install postgreSQL on a system lacking sufficient disk space is potentially dangerous! Before installing postgreSQL, we recommend that you check your file system and ensure at least 1 GB of free hard-drive disk space is available in the installation partition.

1. The *UCS Server* Installer creates postgreSQL databases and tables.




**WinPcap Installation**

WinPcap is a standard tool for link-layer network access in the Windows environment. It allows applications to capture and transmit network packets bypassing the protocol stack and includes kernel-level packet filtering, a network statistics engine and support for remote packet capture. The WinPcap Installer is imbedded in the *UCS Server* Installer, and opens at the end of the postgreSQL installation.

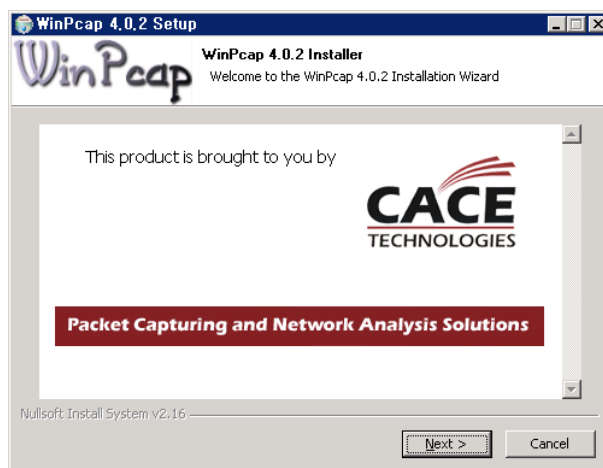


1. In the WinPcap Setup window, click Next to install WinPcap; the WinPcap Software License Agreement window will appear.
2. Click I Agree to continue the installation. The WinPcap installer will begin copying files onto your hard disk.

**NOTE:** If the WinPcap Installer indicates WinPcap is already installed; simply click OK to cancel the WinPcap installation.

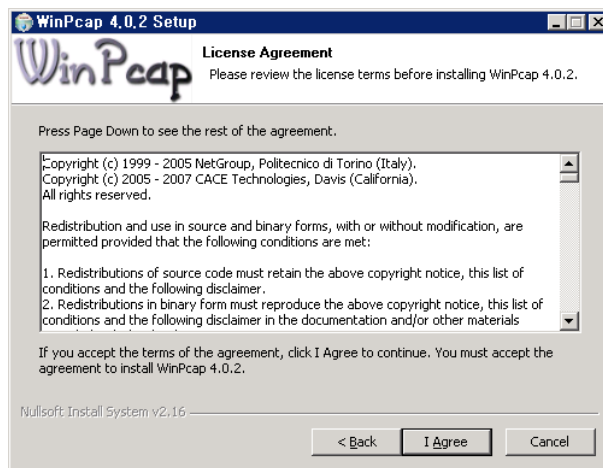



3. After successful installation of WinPcap, click Finish to exit the wizard.

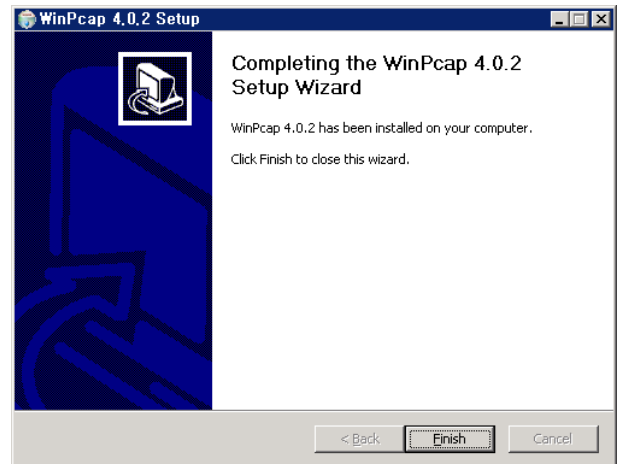

#### 2.3.4 UCS Web Admin Installation

---

*iPECS UCS* employs a Web based Administrative system. After installation of the *UCS Server*, refer to Section 2.3.3, the *UCS Web Admin Server* should be installed.

1. In the *iPECS UCS* CD-ROM directory, open the Web Admin folder.
2. Double click the Setup.exe file.

**NOTE:** If IIS and .Net Framework are not installed, you may see a warning dialog before the *UCS Web Admin* wizard is opened. We recommend both IIS and .NET be installed before proceeding, see Sections 2.3.1 and 2.3.2.

- When the *UCS Web Admin* Install Wizard appears, click Next.



- The Install Progress window displays the status of the installation process.



- When all files have been downloaded, the Installation Completed window is shown; click Finish to close the window.



6. The MIME type for Android .apk file has to be inserted to the IIS so that users download Android .apk file from UCS Web Server.

- Please open the IIS Manager and go to the “ucs” virtual directory under Default Web Site.
- The existing MIME types are displayed when the “ucs” virtual directory is selected.
- Check if the .apk extension exists or not.
- If there is no .apk extension, click Add button on the top right corner of the IIS Manager windows.
- Enter below information
  1. Content-Type : .apk
  2. Value : application/vnd.android.package-archive

**NOTE:** If this MIME type information is not added, the Android .apk file for UCS mobile client will not be downloaded correctly.

### 2.3.5 Setup the Web Server Local Path

---

This section covers setup of the OS to adjust the path in the Web Admin if it was changed from the default drive. If the *UCS Web Admin* program is not installed to the C drive of the *UCS Server* PC, the Web.config file must be modified.


To change the drive name in the upload path:

1. Open the Web.config file in a text editor,
2. Modify the upload and client local path matching the hard drive with UCS Web Admin.
3. Save the modified Web.config file.

### 3. Configuring iPECS UCS

After installation is complete, the *iPECS UCS Server* must be properly configured with information on the *iPECS* systems and *UCS Client* users. The following steps are required to configure the *iPECS UCS Server* to service various *iPECS* systems and *UCS Clients*.

1. Open your browser; enter `http://localhost/ucs` at your browser.
2. Verify if Java Runtime Environment (JRE) is installed on the PC. Otherwise login will fail. For security reasons, your password will be encrypted using JRE during login. If not, please install JRE by clicking “Click to download JRE (Java Runtime Environment)” link from the bottom of the login page.
3. Enter your User ID and Password then click Login.
  - Once the *iPECS UCS Server* installation is successfully completed, an administrator account is provided.
  - The default User ID is **administrator** and the default Password is **ucsadmin**, both are case-sensitive.

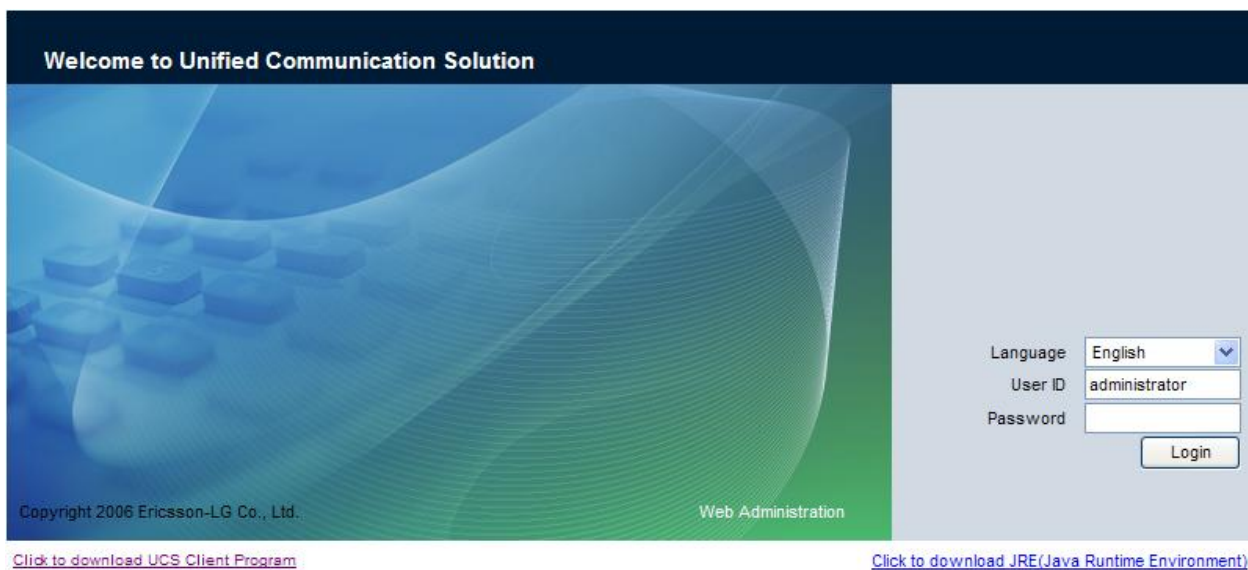

4. Register *iPECS* system information in *iPECS UCS Server*, see Section 6.2.7.
5. Register *iPECS UCS Server* information into *iPECS*, see Section 2.2
6. Double-click the *UCS Server* shortcut to start, *UCS Server*. Verify *UCS Server* is interconnected with *iPECS*.
7. An account is required for a user to login an *iPECS UCS Client*. Accounts for each UCS user must be opened in the Shared directory, see Section 6.2.5.

## 4. Launching iPECS UCS Server

After installation is complete, the *iPECS UCS Server* can be launched. During installation, *iPECS UCS* creates two shortcut icons on the desktop (shown): one to launch *iPECS UCS Server Manager* and one to launch the *UCS OMS*. In place of the shortcut, the application can be launched from the *UCS* item in the Windows **start** menu or Program Files. Also, each time the OS is started the *UCS Server Manager* is executed.




**NOTE:** Before launching the *iPECS UCS Server* application, *UCS Server* must be properly installed and configured, see Sections 2 and 3.

### 4.1 Starting UCS Server

The *iPECS UCS Server* application is launched by opening the *UCS Server Manager*:

1. Double-click the *UCS Server Manager* shortcut, the *ServerManager* window will open, displaying the status of the server component processes.
  - The *iPECS UCS Server Manager* and its processes automatically start each time the OS is started.
  - Each process can be executed manually by selecting the process from the *UCS Server Manager* menu.

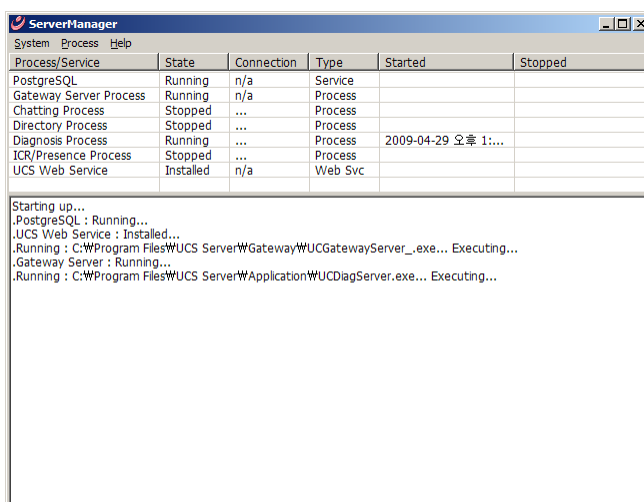

The *UCS Server Manager* shows the status of each process including postgresQL (database), Gateway Server, Chatting, Directory, ICR/Presence, and Diagnosis. The connection column indicates if the process is connected to the database and gateway server. The manager also shows the process Type (Service, Process, etc.) and the time the process was started and/or stopped.

**NOTE:** Windows Firewall may block certain processes and display the Security Alert screen. The *UCS Server* processes must be unblocked. The firewall can be programmed to always unblock a program, refer to Section 7.1 or select Unblock in the Security Alert screen.



## 4.2 UCS Server Manager Main Menu


The *iPECS UCS Server Manager* Main menu includes:

Main Menu

- System - start and stop all *UCS Server* processes.
- Process - start and stop selected *UCS Server* processes.
- Help - provides information about *iPECS UCS Server Manager*.


### 4.2.1 System Menu

The System menu includes Start, Shutdown, Setup and Exit selections. Start initiates all *UCS Server* processes. Shutdown stops all *UCS Server* processes. Setup configures all *UCS Server* roles and defines the IP Addresses of the Gateway and Database Server. Exit closes the *UCS Server Manger* program and stops all *UCS Server* processes.

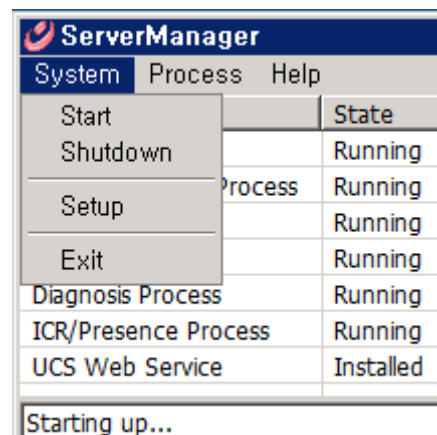

### 4.2.2 Process Menu


The Process menu includes selections to Start and Shutdown selected UCS Server processes.

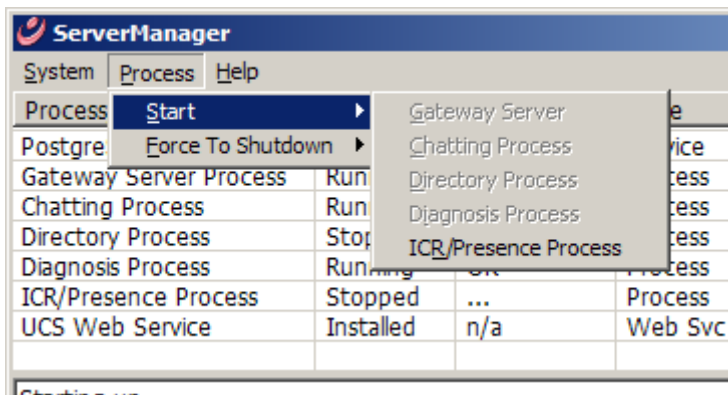

- Start – starts the selected process (running processes cannot be selected).
- Shutdown – stops the selected process (stopped processes cannot be selected).


### 4.2.3 Help Menu

Within the Help menu About can be selected to display the version information of the iPECS UCS Server Manager.

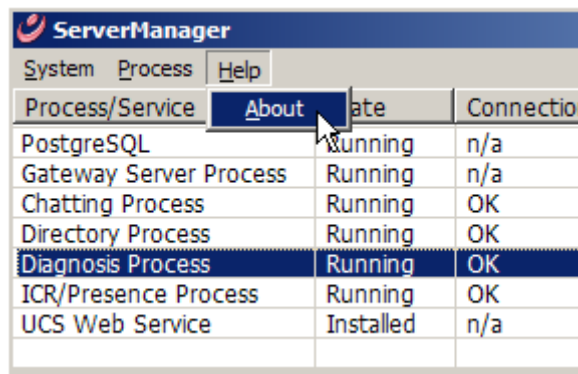

## 4.3 Server Manager Popup Menu


Right-clicking on a process displays the Manager popup Menu. The popup Menu includes selections for Start, Shutdown, Show and Hide.

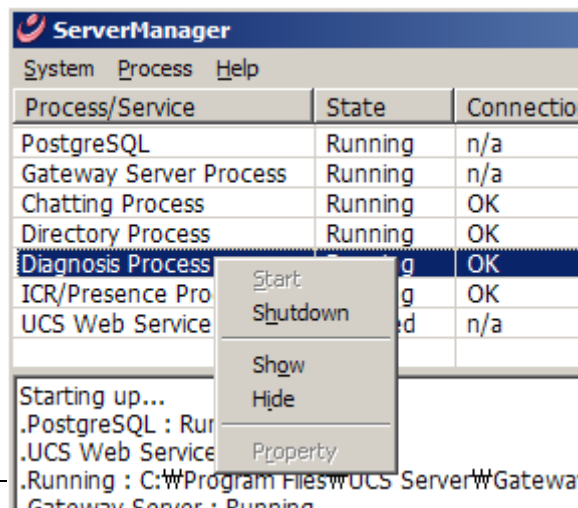

- Start - initiates the selected process (running process cannot be selected).
- Shutdown - stops the selected process (stopped process cannot be selected).
- Show - displays the selected server window.
- Hide - hides the selected server window.


**NOTE:** The Property selection is for future use.

Selecting Show from the popup menu displays the window for the selected server including the Chatting, Directory, ICR and Diagnosis servers. The menu in each server menu allows the administrator to manage and troubleshoot the server, and delivers debug messages to the Administrator.

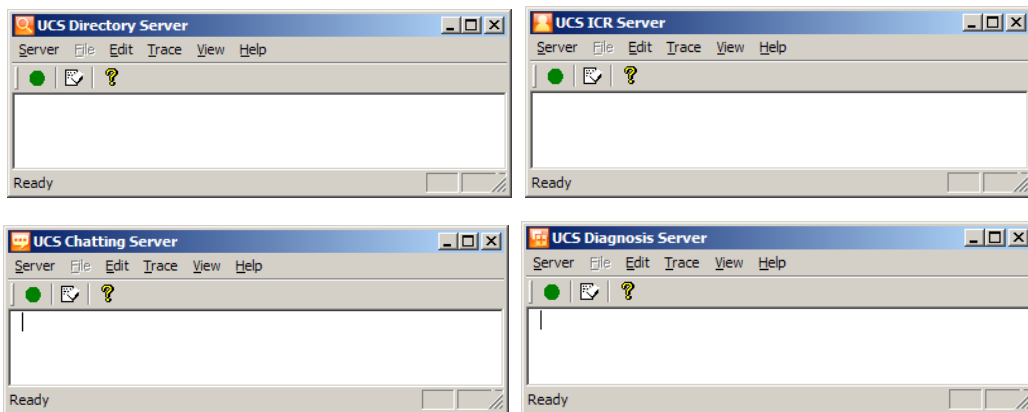


### 4.3.1 Server Configuration

The Server menu includes the Server Configuration, which displays the Connection Configuration screen. Items that can be defined include the IP Addresses of the Gateway and Database Server.

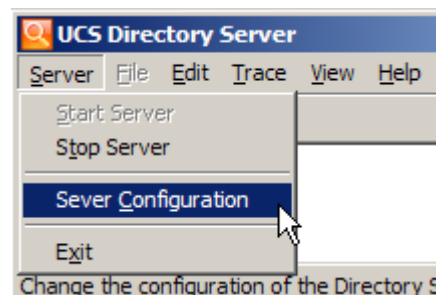




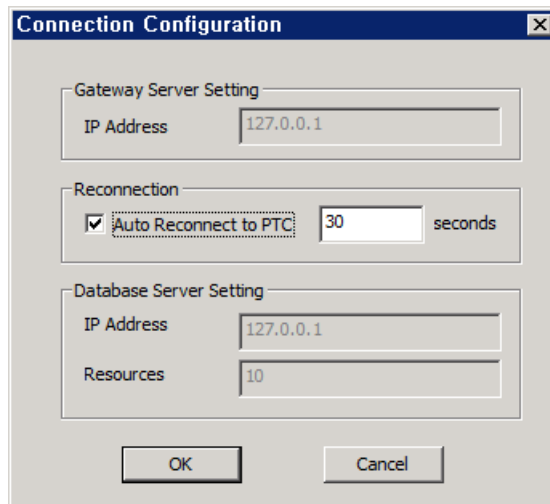


### 4.3.2 Trace Configuration

The Trace Menu includes selections to activate and erase the trace and Trace Configuration. Messages displayed are defined in the Trace Configuration window.

To configure the Trace options:

1. Select Trace from the server window menu.
2. Select Trace Configuration.
3. Check or change the desired items in the Trace Configuration Dialog window.
4. Click OK to accept changes.

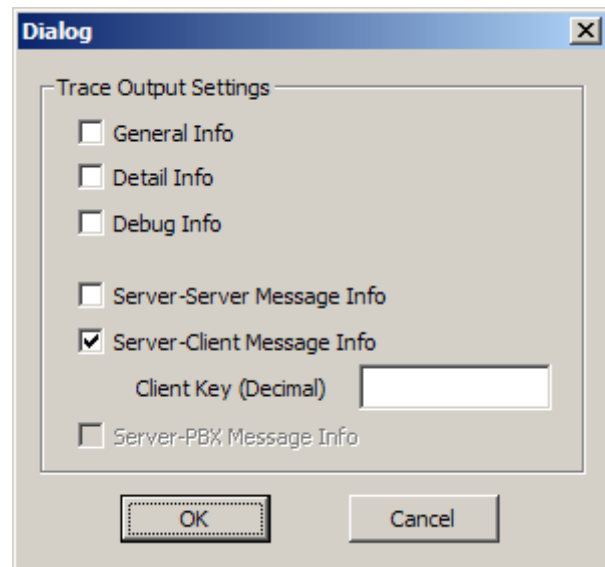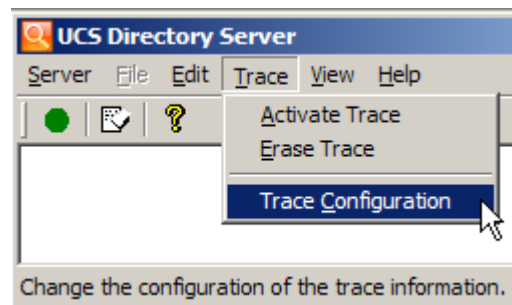

## 5. UCS OMS

### 5.1 Introduction

UCS Operation Monitor Solution (OMS) automatically monitors the *UCS Server*, *UCS Clients*, and connections to *iPECS* systems in the *UCS Server* domain. In addition, the *UCS OMS* generates reports and maintains logs of status and fault messages as defined in the *UCS Web Admin*. Employing the monitoring and automatic reporting function, issues are often identified before users experience difficulty.

### 5.2 UCS OMS Access

When *iPECS UCS Server* is installed, two desk-top icons are created, the *UCS Server Manager* and *UCS Server OMS* icons.

To start *UCS OMS*:

1. Double-click the *UCS OMS* icon located on the desktop.
2. Enter your User ID and Password to display the *UCS OMS* window.


- The default User ID and Password are **administrator** and **ucsadmin** and are case sensitive.

**NOTE:** If the Database Server is run on a different IP host, it may be necessary to change the *OMS* General Settings.

To change the OMS General Settings:

1. Double-click the *UCS OMS* icon located on the desk-top.
2. Select the Setting icon in the lower right corner of the login screen and follow the instructions in Section 5.3.1.1.

**NOTE:** Once login is complete, these settings can only be viewed and not changed.

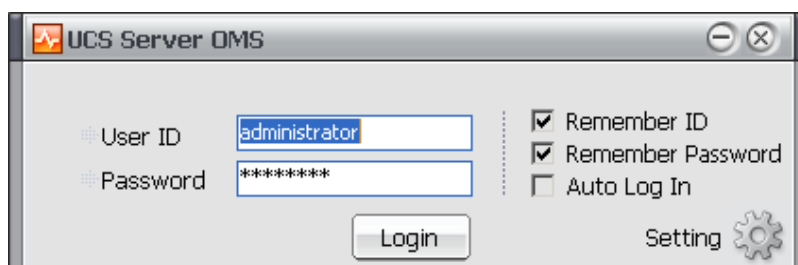

### 5.3 UCS OMS Operation

The *UCS OMS* window has two (2) major elements, the log controls and Setting tool on the right and the Status view controls to the left.

- The log controls access the Setting menu and Status and Fault logs.
- The Status view controls display the status of Clients, Servers and *iPECS* systems served by the *UCS*.




### 5.3.1 UCS OMS Settings

In the Option Setting screen under General characteristics, the time interval for updating status information and screen views in the Client and System Status screens can be defined. Settings in the *UCS OMS* application can be changed only when the Administrator is logged out with the *UCS OMS* window Setting tool.

To view the Option Setting screen:

1. Click the Setting Tool.

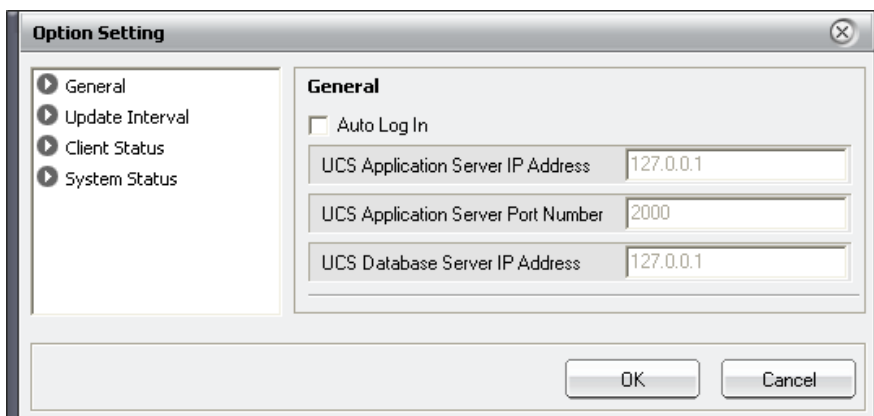

#### 5.3.1.1 General

After initial login, the General item in the Option Setting window allows the Administrator to enable/disable Auto Log In and display the IP address and port for the *UCS Application Server* and the *UCS Database Server* IP addresses.

To automatically login to *UCS OMS* when the *UCS OMS* application is launched:


1. Check Auto Log In.

#### 5.3.1.2 Update Interval

Update Intervals determine the duration between status updates for Clients, Servers, or *iPECS* systems. The interval is separately defined for each.

To modify the interval, perform the following steps:

1. Select the desired interval box.
2. Enter the desired interval in milliseconds. The interval can be set for 3 to 60 seconds (in msec).
3. Select OK to store any changes.

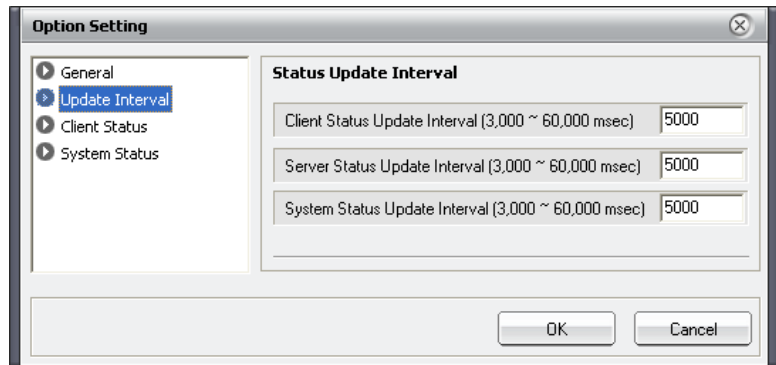


**5.3.1.3 Client Status Column View**

The Client Status window, refer to Section 5.3.4, displays a number of items for each registered client in a columnar format. Columns in the Client Status window can be hidden.

To remove a column from the Client Status window:

1. Select Client Status.
2. Uncheck the box next to the item(s) to be removed.
3. Click the OK button.

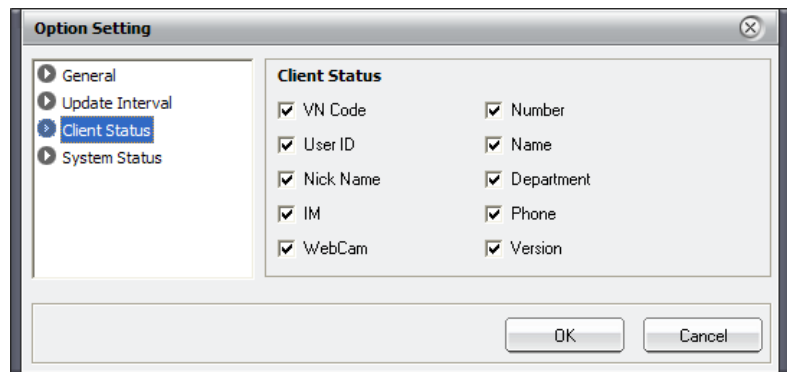


**5.3.1.4 System Status Screen View**

For each serviced *iPECS* system, the System Status window, refer to Section 5.3.6, displays a number of items in column format. If desired, columns can be hidden using this screen.

To remove a column from the System Status window:

1. Select System Status.
2. Uncheck the box next to the item to be removed.
3. Click the OK button.

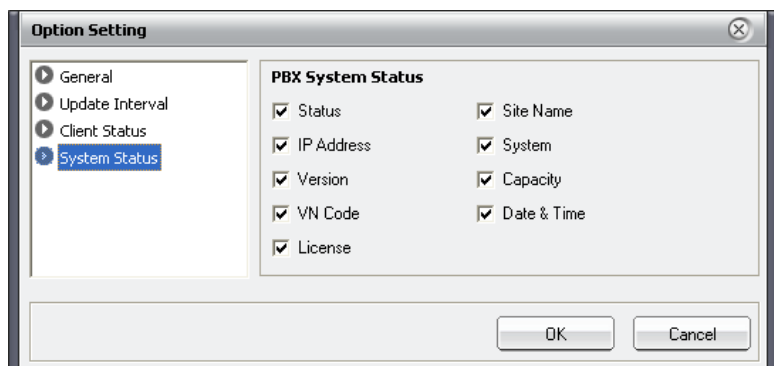

### 5.3.2 Log Messages

Whenever an event or fault assigned for reporting occurs, a corresponding message is logged in the message logs. Based on the log message handling options set in *UCS Web Admin*, the message will be displayed in the Log Messages window. Refer to Section 6.2.1.4 for details.

To view the message log:

1. Click on the Log Messages control in the *UCS OMS* window.




To delete the messages in the Log Messages window:

1. Click Clear in the Log Messages window.

To save the messages to a text file:

1. Click Save As in the Log Messages window and follow the normal steps to save a file.

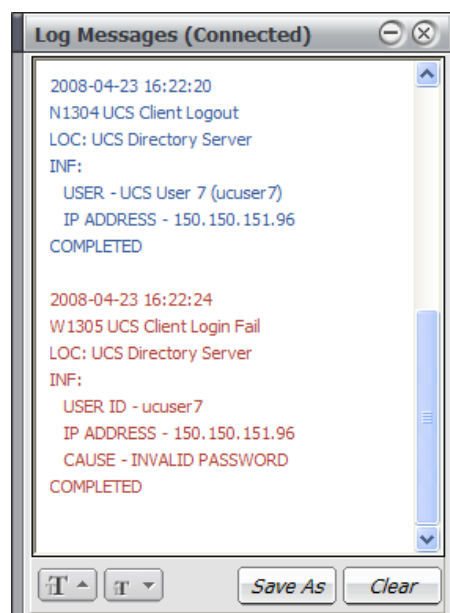

### 5.3.3 Log Message History

When an event or fault assigned to be saved occurs, a corresponding message is stored in the Log Message History Table. Based on the log message handling options set in the *UCS Web Admin*, the message will be saved in the table. Refer to Section 6.2.1.4 for details on handling options.

To view message history:

1. Click on the Log Viewer control in the *UCS OMS* window.

Type	Date & Time	Code	Cause	Process	Detail
Notice	2008-04-23 15:43:56	1101	PBX System Connected	UCS ICR Presence Server	SITE NAME - Lab iPECS IP ADDRESS - 192.168.131.18 SYSTEM TYPE: iPECS-300
Notice	2008-04-23 15:43:56	1103	Presence Service Started	UCS ICR Presence Server	SITE NAME - Lab iPECS IP ADDRESS - 192.168.131.18 SYSTEM TYPE: iPECS-300
Notice	2008-04-23 16:20:52	1303	UCS Client Login	UCS Directory Server	USER - UCS User 6 (ucuser6) IP ADDRESS - 150.150.131.131
Notice	2008-04-23 16:22:11	1304	UCS Client Logout	UCS Directory Server	USER - UCS User 6 (ucuser6) IP ADDRESS - 150.150.131.131
Notice	2008-04-23 16:22:12	1303	UCS Client Login	UCS Directory Server	USER - UCS User 6 (ucuser6) IP ADDRESS - 150.150.131.131
Notice	2008-04-23 16:22:20	1304	UCS Client Logout	UCS Directory Server	USER - UCS User 7 (ucuser7) IP ADDRESS - 150.150.151.96
Warning	2008-04-23 16:22:24	1305	UCS Client Login Fail	UCS Directory Server	USER ID - ucuser7 IP ADDRESS - 150.150.151.96 CAUSE - INVALID PASSWORD

2008-04-23 [dropdown] [Update] [Delete] [Delete All]

To filter message history:

1. In the Log Viewer window, select the desired column header for filtering.
2. Click on the combo Box (down-arrow in column header).
3. Select filtering item  
OR
4. Select Custom and input the appropriate conditions for filtering.

To delete a message:

1. In the Log Viewer window, click on the desired message.
2. Click Delete.

To delete all messages:

1. Click Delete All.

#### 5.3.4 UCS Client Status

The *UCS OMS* monitors and displays the status of the *UCS Client* phone and status for IM.


To view the status of *UCS Clients*:


1. Click the Client status control to display the Client Status screen.

To filter the status window contents:

1. In the Client Status screen, select the desired column header for filtering.
2. Click on the combo box (down-arrow in column header).



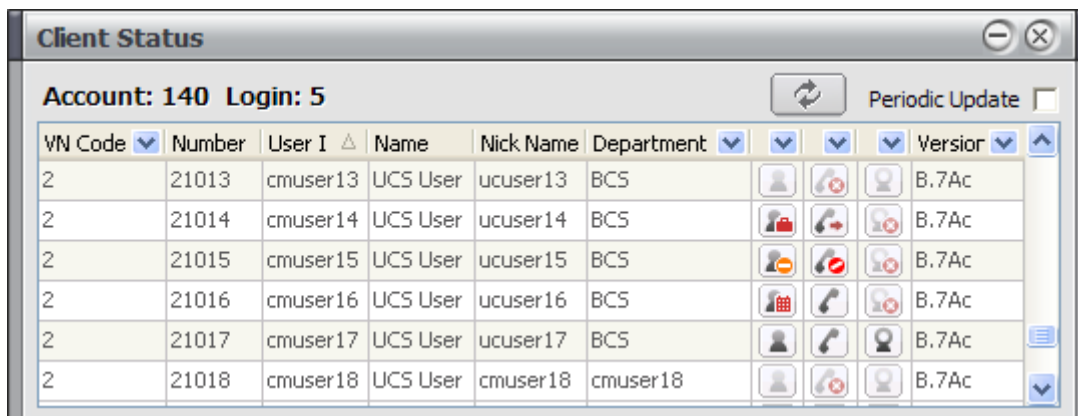




3. Select filtering item,  
OR
4. Select Custom and input the appropriate conditions for filtering.








The Client Status window shows all *UCS Client* information and status. The refresh button () will update the status in real-time. The status information can be updated at regular intervals (default 5 seconds), by checking Periodic Update in the upper right corner of the screen. For each *UCS Client*, the Client Status window shows:

- VN Code - voice networking code of host *iPECS* system.
- Number - telephone number for the *UCS Client*.
- User ID - ID associated with the *UCS Client*.
- Name - the name associated with the *UCS Client*.
- Nickname - the nickname associated with the *UCS Client*.
- Department - the department associated with the *UCS Client*.
- IM Status - IM status/Presence icon for the associated *UCS Client*.
- Phone Status - phone status icon for the associated *UCS Client*.
- Webcam Status - Webcam status icon for the associated *UCS Client*.
- Version - client version for the associated *UCS Client*.





The IM or Presence status icons are:

-  Offline
-  Online
-  Busy
-  Away
-  Be Right Back
-  Out of Office
-  In a Meeting

The Phone status icons are:

-  Idle
-  Busy, Ext Call Busy, Trunk Call Busy
-  Unavailable
-  DND
-  Call Forward

The Web Cam status icons are:

-  Idle
-  Busy
-  Unavailable, Webcam not connected at contact's PC.
-  Uninstalled

### 5.3.5 UCS Server Status


The *UCS OMS* monitors and displays the status of the various *UCS Server* components including the Gateway, Database and Application servers and processes. The status is indicated by a colored button or box next to the server or process designation, a green indicator for normal operation and red indicating a server or process fault. The status information is updated at periodic intervals (default 5 seconds) based on settings in the *UCS OMS* Option Settings screen.

To view the status of the *UCS Server* components:

1. Click the Server status control to display the Server Status screen.

For each server component, the *UCS OMS* displays the status of each process under control of the server. The Server Status window displays:

- Server Name - unique default name of the *UCS Server*.
- Status - the name of the server or process, current status for each *UCS Server* component and process (green indicates normal operation, red indicates a connection fault).
- IP Address - IP address associated with each *UCS* component server.

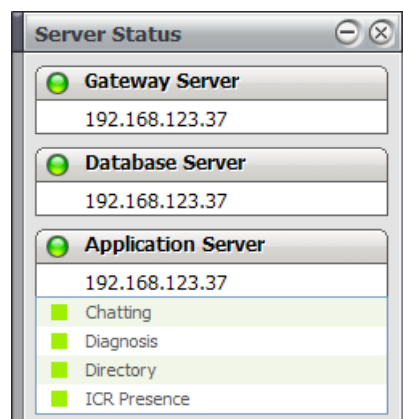




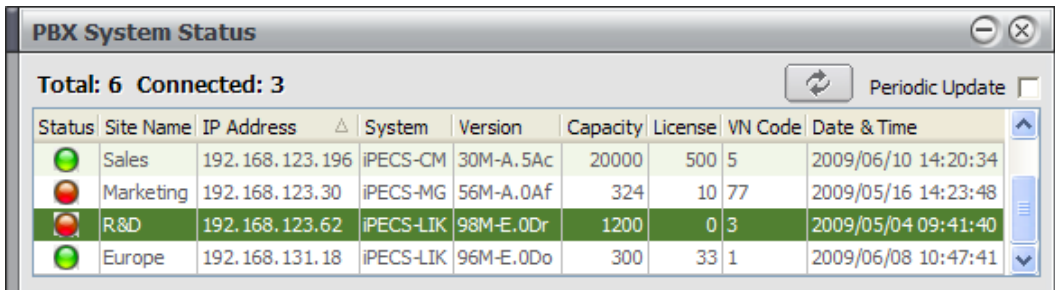
### 5.3.6 iPECS System Status





The *UCS OMS* monitors and displays the connection status for each *iPECS* system linked to the *UCS Server*.

To view the status of *iPECS* systems:

1. Click the System status control to display the System Status screen.

The System Status screen displays a list of linked systems and status for each. The refresh button (  ), will update the status in real-time. The status is indicated by the colored button at the beginning of each row; green indicates normal operation and red indicates a fault. The status information can be updated at regular intervals (default 5 seconds), by checking Periodic Update in the upper right corner of the screen. Information displayed includes:



Status	Site Name	IP Address	System	Version	Capacity	License	VN Code	Date & Time
	Sales	192.168.123.196	iPECS-CM	30M-A.5Ac	20000	500	5	2009/06/10 14:20:34
	Marketing	192.168.123.30	iPECS-MG	56M-A.0Af	324	10	77	2009/05/16 14:23:48
	R&D	192.168.123.62	iPECS-LIK	98M-E.0Dr	1200	0	3	2009/05/04 09:41:40
	Europe	192.168.131.18	iPECS-LIK	96M-E.0Do	300	33	1	2009/06/08 10:47:41

- Status - system status (green indicates normal operation, red indicates a connection fault).
- Site Name - name associated with the *iPECS* system site.
- IP Address - IP address of the system.
- System - system type.
- Version - version of the system.
- Capacity - the maximum number of *iPECS* system users.
- License - the number of simultaneous *UCS Client* users licensed at each *iPECS* system.
- VN Code - voice networking code for each system.
- Date & Time - date and time status was received from the *iPECS* system.

## 6. UCS Web Admin


### 6.1 UCS Web Admin Access

*iPECS UCS Server* is managed through the *UCS Web Admin Server*. The Admin server is accessed using a Web browser. To access the *UCS Web Admin* application:

1. Open your Web browser.
2. Point the browser to the *http://location of the UCS Web Server (IP address or partition)/ucs*; the Login screen will appear.

**NOTE:** *http://localhost/ucs* should work if the *UCS Web Admin Server* is locally installed.

3. From the drop-down menu, select the desired Language (English or Local).
4. Enter your User ID, default is **administrator**.
5. Enter your Password, default is **ucsadmin**; for non-admin users, the User ID is employed as the default password.
6. Click Login to display the *UCS Web Admin* window.

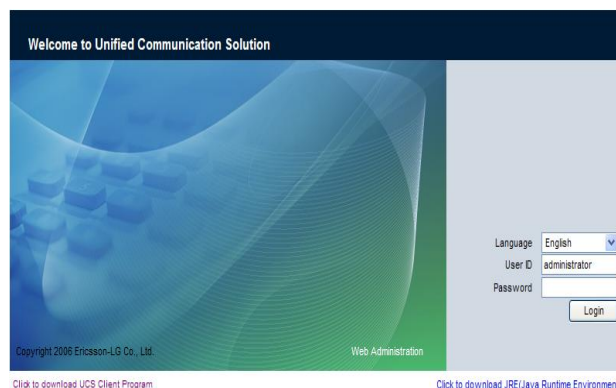


**NOTE:** the Java Runtime Environment (JRE) must be installed before login. If JRE is not installed the web browser will recommend to install JRE. If JRE is installed properly and the UCS WebAdmin login page is opened, the user can see the JRE tray icon. If JRE has not been installed, user can install it manually by clicking the link on the UCS WebAdmin login page.

**NOTE:** UCS WebAdmin is optimized to run on Microsoft Internet Explorer.

### 6.2 UCS Web Admin Operation

The *UCS Web Admin* window is comprised of three parts:

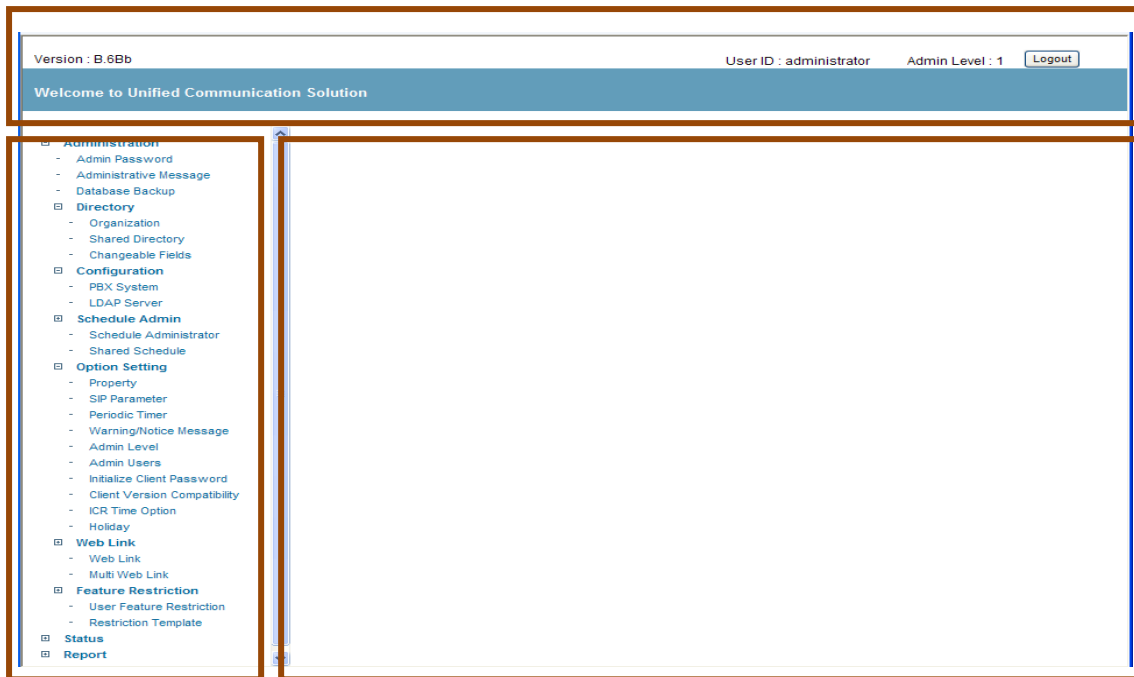

- Upper tool bar - identifies the user's Admin level, and the Logout control.
- Left-side Navigation pane - shows and allows access to the available Admin screens.
- Right-side Admin screen - displays data for the selected screen.

Each *UCS Web Admin* screen includes a display of pertinent data and may include a menu bar with controls for modifying and saving data.

To display a *UCS Admin* screen:

1. Select the desired Admin screen in the left navigation pane.

The following sections give detailed descriptions of the various Admin screens and any applicable instructions for entering data.

### 6.2.1 Admin Password

In the Admin Password screen the user's Admin login password can be modified. The password for a *UCS Client* can be changed only by the specific *UCS Client*; other users and the Administrator cannot change the password for another user.

**NOTE:** the Administrator can return client passwords and User IDs to default.

**Admin Password**

---

---

Current Password

New Password

Confirm Password

To update the Password for the *UCS Client*, perform the following steps:

1. From the Admin Screen, click on the Admin Password link; the Admin Password screen will display.
2. Enter the Current Password, the New Password, and confirm the password in the Confirm Password box.
3. Click Save to accept the change.

### 6.2.2 Admin Message

In the Admin Message screen the Administrator can send messages in real-time to on-line *UCS Clients*. The message will also be sent to *UCS Clients* as they login. Each message can be up to 255 characters with a subject of 100 characters.

**Admin Messages**

---

---


<b>Date &amp; Time</b>	2008-04-15 11:46:54	
<b>Subject</b>	<input type="text" value="[Notice] UCS Client Upgrade version released"/>	
<input type="checkbox"/> <b>Contents</b>	<input type="text" value="UCS Client has been upgraded. Download and install new verion, please."/>	
	Login User	<input type="button" value="Send"/>
<b>Date &amp; Time</b>	2008-04-15 11:44:08	
<b>Subject</b>	<input type="text" value="[Notice] Server Restart"/>	
<input type="checkbox"/> <b>Contents</b>	<input type="text" value="Server program will be upgraded from 23:10 to 24:00. During that time, user cannot use UCS Client. Thank you."/>	
	Login User	<input type="button" value="Send"/>

---

### Control buttons


- New Message - entry for a new admin message.
- Delete - deletes selected messages.
- Delete All - deletes all messages.
- Reload - refreshes the current *UCS Admin* screen.
- Send - re-sends selected message.

The message window shown displays on the user's PC.

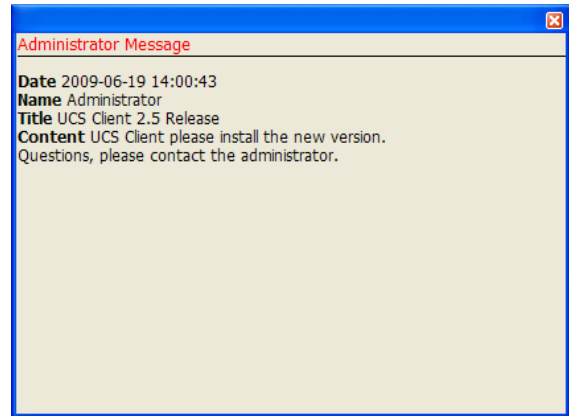

To send a message:

1. Click New Message.
2. Enter the Subject, Destination and Contents.
3. Click Send to send the message.

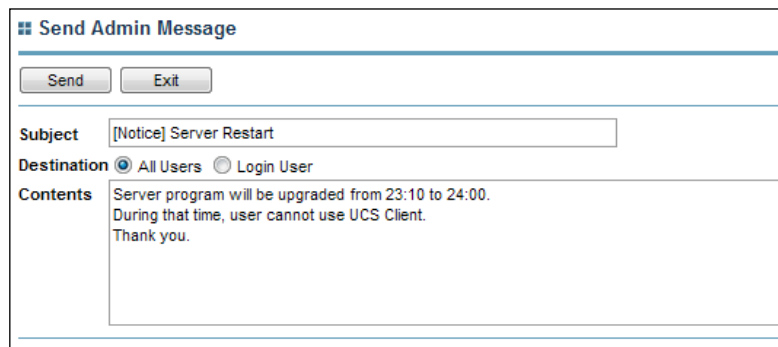

**Control buttons**

- Send - sends new message.
- Exit - closes the Send Admin Message window.

**6.2.3 Database Backup Setting**

In the Database Backup Setting screen, Administrators may change settings of *UCS Server* database backup function. The backup file can be used to restore the *UCS Server* database to the version in the backup file.

**Database Backup Setting**

Reload Save

**Weekday**

Every Sunday  Every Monday  Every Tuesday  Every Wednesday  
 Every Thursday  Every Friday  Every Saturday  Everyday

**Time**

01:00  02:00  03:00  04:00  05:00  06:00  
 07:00  08:00  09:00  10:00  11:00  12:00  
 13:00  14:00  15:00  16:00  17:00  18:00  
 19:00  20:00  21:00  22:00  23:00  24:00

**Data Preservation Period**

1 Month  3 Months  6 Months  12 Months

**Location**

D:\Program Files\UCS Server\DBbackup\

On Demand Database Backup

### Control buttons

- Reload - refreshes the current *UCS Admin* screen.
- Save - saves the current *UCS Admin* screen.

### Properties

- Weekday - sets the day of week to run the backup function.
- Time - sets the time of day to run the backup function.
- Data Preservation Period - selects the period to store backup data (expired data will be deleted after the period).
- Location - shows local path for backup data (location and file name in the *UCS Server* where the backup data is stored).
- On Demand Database Backup – Starts Database Backup within 60 seconds.

### 6.2.4 E-mail Dispatch

UCS Client users receive Account Creation E-mail based on E-mail Dispatch information. Administrator could prepare for what they want to deliver to users in advance. For E-mail Server setting, contact to your network administrator.

# E-mail Dispatch

**\* E-mail Writing**

Title

Content

Notice) It is possible to modify the above Title and Content for your own purpose. Don't modify either %userName% or %userID% unintentionally. The two keywords of %userName% and %userID% are reserved and they will be replaced with UCS user name and ID respectively. The unappropriate information will be sent via E-Mail in case of errors.

**\* E-mail Server setting**

SMTP Sever IP

SMTP Sever Port

E-mail User ID

E-mail User Password(ReadOnly)  New Password(WriteOnly)

E-mail Address to be returned


Use SPA

#### Control buttons

- Reload - refreshes the current *E-mail Dispatch* screen.
- Save - saves the current *E-mail Dispatch* screen.

### 6.2.5 Organization

In the Organization screen, Administrators can make up organization charts of the company. Administrator can create a new department, delete or rename it. Also specific departments can be moved to another department. To import department names of shared users click on the Get Department button. The organization chart can be seen using the UCS Client organization tab.

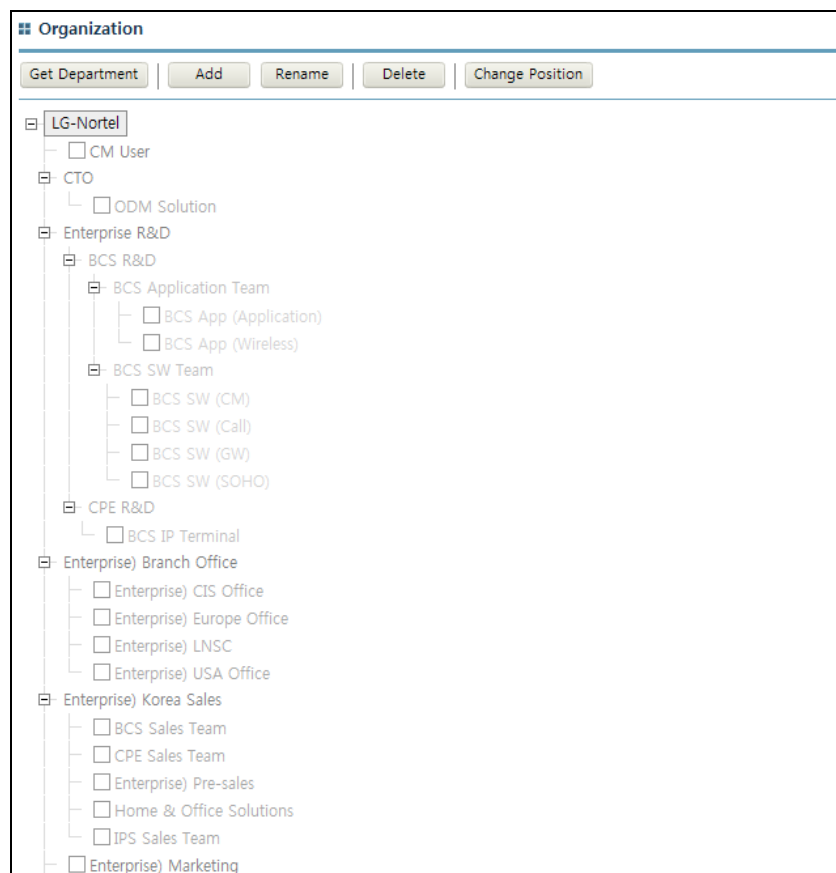


#### **Control buttons**

- Get Department - import department information of shared users
- Add - add new departments
- Rename - rename a department
- Delete - delete departments
- Change Position - modify the position of selected departments

To add departments:




1. Select the parent department where new child departments will be added.
2. Click on the Add button.
3. Input the name of the new departments
4. Click OK button.

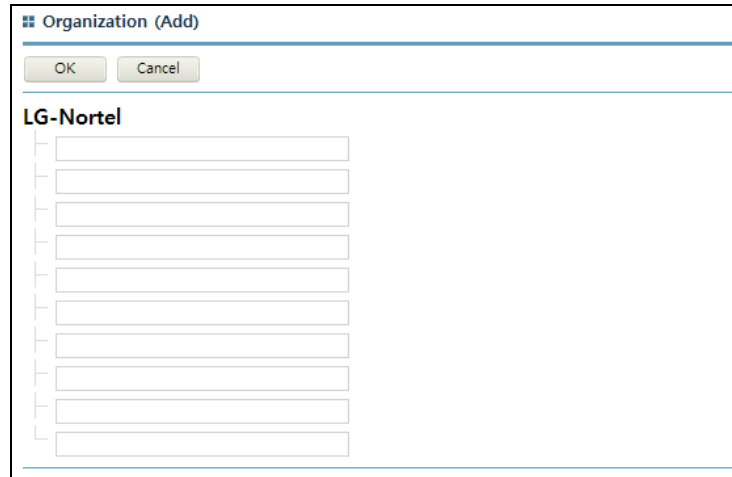


To rename departments:

1. Select the department that will be renamed.
2. Click on the Rename button.
3. Input the new name of the department
4. Click OK button.

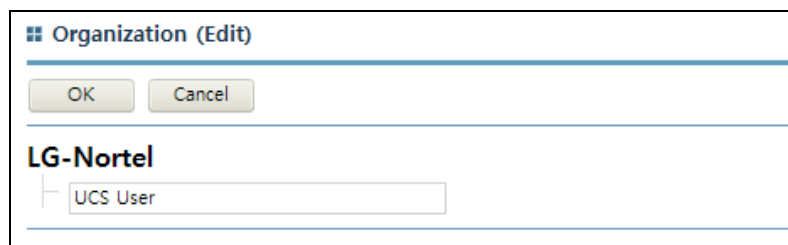

To change the position of department:

1. Select departments to move.
2. Click Change Position button.
3. Select parent department
4. Click OK button.

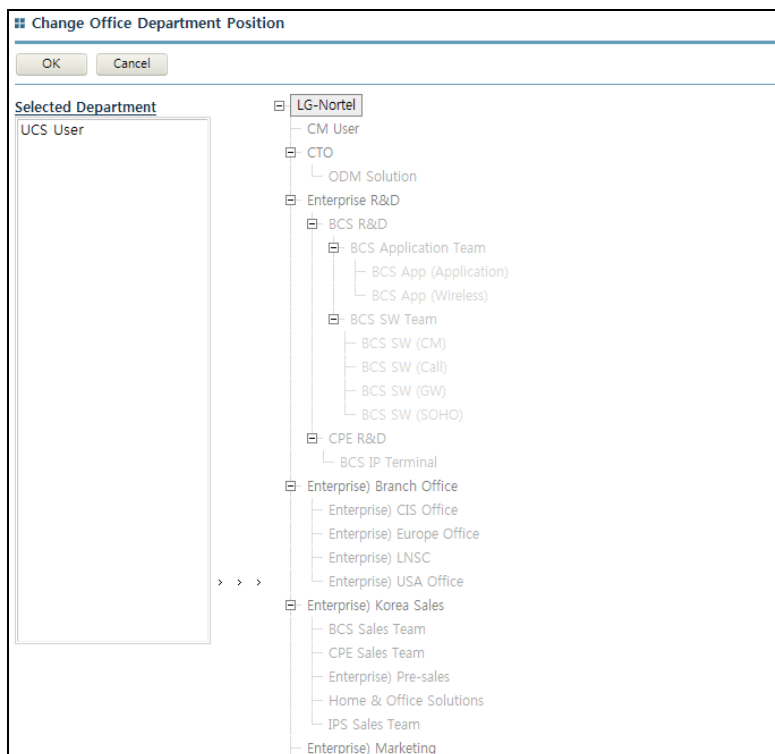

To delete a department:

1. Select the department(s) to delete.
2. Click on the Delete button.

### 6.2.6 Shared Directory

The Shared Directory screen displays contact information for the various user accounts within the *UCS Server* as well as other contacts defined by the Administrator. In this screen, user account records and contacts are added, deleted or modified. The directory can be searched, sorted and can be imported and exported from an external Comma Separated Value (.csv) format file.

The Shared Directory has two types of users: internal and external users. Internal users are normal UCS users that have an extension number and may have a UCS client User ID. External users do not have a User ID and extension number.

There are three areas of the Shared Directory screen:

- Top of the screen - contains the menu with controls.
- Center of the screen - shows headers and directory records; selecting an underlined header will sort the records by that column.
- Lower part of the screen - includes page count and navigation arrows to access additional directory pages.

Shared Directory					
Internal User					
<input type="button" value="Export"/> <input type="button" value="Import"/> <input type="button" value="Add"/> <input type="button" value="Delete"/> <input type="button" value="Edit"/> <input type="button" value="Change Department"/> <input type="button" value="Edit Restriction"/>					
Name	int	Search [Internal User 14829/15000, External User 2/2000, Clients 14829/15000] <input checked="" type="checkbox"/> Confirmation from PBX			
Name	Desktop Phone	Department	User ID	VN Code	
<input type="checkbox"/> inter10	10010	BCS	inter10	2	
<input type="checkbox"/> inter100	10100	BCS	inter100	2	
<input type="checkbox"/> inter10000	20000	BCS	inter10000	2	
<input type="checkbox"/> inter10001	20001	BCS	inter10001	2	
<input type="checkbox"/> inter10002	20002	BCS	inter10002	2	
<input type="checkbox"/> inter10003	20003	BCS	inter10003	2	
<input type="checkbox"/> inter10004	20004	BCS	inter10004	2	
<input type="checkbox"/> inter10005	20005	BCS	inter10005	2	
<input type="checkbox"/> inter10006	20006	BCS	inter10006	2	
<input type="checkbox"/> inter10007	20007	BCS	inter10007	2	

Select all items at this page

2 3 4 5 6 7 8 9 10 > >>

**Control buttons**

- Export - exports Shared directory records to a .csv format file
- Import - imports Shared directory records from a .csv format file.
- Add - adds a new record to the directory.
- Delete - deletes selected records from the directory.
- Edit - edits an existing directory record.
- Search - searches the directory based on selected column (pull down list) and input in the search box.
- Change Department - changes the department name of all selected users
- Edit Restriction – changes limit any functions to every UC Client user. For details, refer to the [User Feature Restriction](#).

To add or edit a selected record:

1. Click Add or Edit to display the Contact Entry screen.
2. Enter the appropriate data for the record (items in bold ink are required fields).
  - A. Administrators can choose appropriate office department by clicking “Assign Department” button. Office Departments should be established in Organization menu in advance.
3. Select Add to store the record.

Shared Directory

Internal User | Export | Import | Add | Delete | Edit | Change Department | Edit Restriction

Name  Search [Internal User 14829/15000, External User 2/2000, Clients 14829/15000]  Confirmation from PBX

<input type="text"/>	<input type="text"/>
<b>Desktop Phone</b> <input type="text"/> <input type="text"/> <input type="text"/> <b>Cellular Phone</b> <input type="text"/>	
<input type="checkbox"/> Linked Pair <a href="#">View Phone Number Format</a>	
<b>Office Name</b> <input type="text"/>	<b>Office Department</b> <input type="text"/> <span>Assign Department</span>
<b>Office Phone</b> <input type="text"/>	<b>Office Fax</b> <input type="text"/>
<b>Office Address</b> <input type="text"/>	
<b>Home Phone</b> <input type="text"/>	<b>Home Address</b> <input type="text"/>
<b>Email</b> <input type="text"/>	
<b>User ID</b> <input type="text"/>	<b>VN Code</b> <input type="text" value="3 : Shin(iPECS-LIK)"/>

Add Clear Cancel

**Internal User**

Shared Directory

External User | Export | Import | Add | Delete | Edit

Name  Search [Internal User 14829/15000, External User 2/2000, Clients 14829/15000]

<input type="text"/>	<input type="text"/>
<b>Desktop Phone</b> <input type="text"/> <input type="text"/> <input type="text"/> <b>Cellular Phone</b> <input type="text"/>	
<input type="checkbox"/> Linked Pair <a href="#">View Phone Number Format</a>	
<b>Office Name</b> <input type="text"/>	<b>Office Department</b> <input type="text" value="External User"/> <span>Assign Department</span>
<b>Office Phone</b> <input type="text"/>	<b>Office Fax</b> <input type="text"/>
<b>Office Address</b> <input type="text"/>	
<b>Home Phone</b> <input type="text"/>	<b>Home Address</b> <input type="text"/>
<b>Email</b> <input type="text"/>	
<b>User ID</b> <input type="text"/>	<b>VN Code</b> <input type="text" value="3 : Shin(iPECS-LIK)"/>

Add Clear Cancel

**External User**

**NOTE:** The Desktop Phone number should be formatted as *+country code (area code) number* (ex., +82 (041) 123-1234)

**NOTE:** Administrators have to make UCS Account ‘Linked Pair’ if they want UCS with the same number of the Hard Phone. However, after generating UCS Account as a standalone client and they want to make the User as a slave of the Hard Phone, they have to change the desktop phone number of the UCS Account to correct data mismatch between UCS Server and iPECS System just by clicking “Change Desktop Phone” button of the Shared Directory Edit Screen.

To import a .csv formatted file for the directory:

1. Click Import to display the Import window.

You can import address information from CSV file into SHARED ADDRESS database. First, you will need to format your CSV file. You can download already formatted example file in this web page. Or you can create your own CSV file. After modifying your CSV file in your local PC, you will need to upload modified file into Web Server. Then you can import by clicking Import button.

1. Download Example

2. When an invalid Department Name is given,  ▾

3. Choose File to be imported

4. Upload File and Import   Confirmation from PBX

2. Choose an option in case there is an inappropriate office department name of the .csv formatted file.
3. Use Browse to locate a file or enter the file name.
4. Click Import; the file will be imported as the new directory.
5. To view the result of import, open the file from *Open File Dialog Box* after finishing the import.

An example Phonebook file in the .csv format is available from the Import window. To view the sample file shown below:

1. Click on the [Example.txt](#) link from the window.

```
Name,NickName,N/W Code,DesktopPhone,CellularPhone,OfficeName,OfficeDepartment,OfficePhone,HomePhone,Email,UserID,LinkedPair <-- DO NOT REMOVE THIS LINE
Tom Hanks,tom,2,+1 (02) 123-1234,011-111-1111,Ericsson-Ig,R&D,+1 (02) 123-2345,+1 (02) 123-3456,tom@lgn.com,tom, FALSE<-- Example) <-- DO NOT REMOVE THIS LINE
```


To export a shared directory to a .csv formatted file:

1. Click on the Export button.
2. Click Save to save the exported file to local computer.

**NOTE:** In some cases the extension of the exported file could be .xls not .csv according to your Windows environment. In this case user must convert the file extension from .xls to .csv manually.

### 6.2.7 Changeable Fields Setting

In the Changeable Fields Setting screen the Administrator defines the fields that individual users are permitted to change in their My Information window.

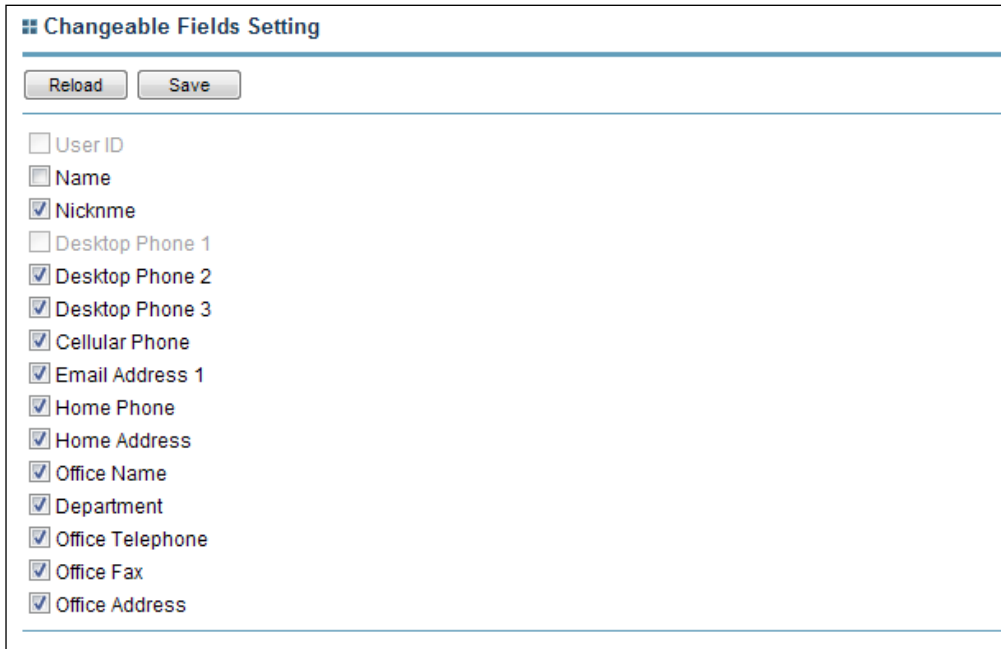


Checked items in the Changeable Fields screen are available to the individual *UCS Client* in the My Information window. Other fields are shown but cannot be changed by the user.

#### **Control buttons**

- Reload - to refresh the current *UCS Admin* screen.
- Save - to save the current *UCS Admin* screen.

**NOTE:** Settings apply to all *UCS Clients*; User ID and Desktop Phone 1 must be unique values for each *UCS Client*.

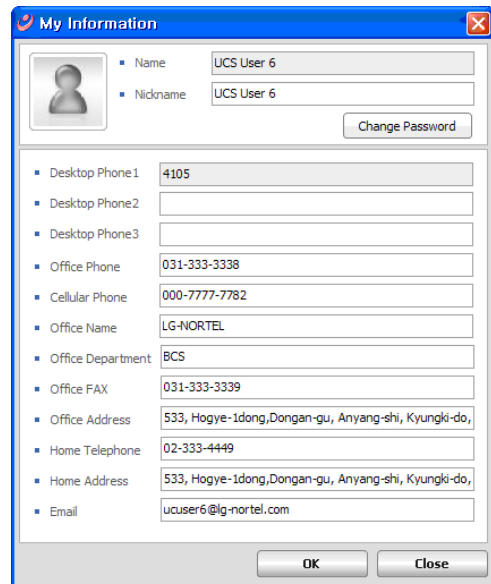

### 6.2.8 Presence Registration

This function regards to allow the system administrator to permit new user accounts to be visible (as shared users) to existing users by default. If user does not wish to be visible to others, user must block other himself/herself. (In versions prior to 2.7, existing users had to search for new users and allowed these users to see online status too often)

Presence Registration				
User ID	int	Search	Reload	[Internal User 14829/15000, External User 4/2000, Clients 14831/15000]
User ID	Name	Presence Entry Count	Private member count	Mutual presence permission
inter12001	inter12001	200	2	Execution
inter12002	inter12002	200	2	Execution
inter11854	inter11854	100	1	Execution
inter6926	inter6926	100	1	Execution
inter312	inter312	100	1	Execution
inter8553	inter8553	100	1	Execution
inter2777	inter2777	100	1	Execution
inter11235	inter11235	100	1	Execution
inter6089	inter6089	100	1	Execution
inter3985	inter3985	100	1	Execution

#### Control buttons

- Search- searches shared user who to allow mutual presence.
- Reload – refreshes this window.

**NOTE:** Three conditions below should meet at the same time to use this function. The Execution button will be disabled when the conditions are not met. For internal shared users who are online UCS Client, the Administrator can't execute this operation for them.

1. Presence Entry Count must be greater than or equal to internal shared user.
2. And Presence Entry Count must be greater than Private member count.
3. And Presence Entry Count must be greater than or equal to the sum of internal shared user and Private member count.

### 6.2.9 E-mail Dispatch Result

This function shows the result of E-mail Dispatch for new UCS Client users. Administrator can resend E-mail by clicking “Execution” button, which sets Dispatching Trial Number and Status to 0(zero) and Ready respectively.

**## E-mail Dispatch Result**

User ID  Search    [Internal User 14829/15000, External User 4/2000, Clients 14831/15000]

User ID	Name	E-mail Address 1	Kind Of Email	Dispatching Trial Number	Status	Resend
<input type="checkbox"/> 111	test1	test1@lgericsson.com	New Account Announcement	1	Completed	<input type="button" value="Execution"/>
<input type="checkbox"/> 1111	1111	1@1.1	New Account Announcement	1	Completed	<input type="button" value="Execution"/>
<input type="checkbox"/> 222	test2	test2@lgericsson.com	New Account Announcement	1	Completed	<input type="button" value="Execution"/>
<input type="checkbox"/> 4190	4190	4190	New Account Announcement	5	Ready	<input type="button" value="Execution"/>
<input type="checkbox"/> lik11032	LIK11032	juhoon.kim@lgericsson.com	New Account Announcement	1	Completed	<input type="button" value="Execution"/>
<input type="checkbox"/> lik11033	LIK11033	jaemin.choi@lgericsson.com	New Account Announcement	1	Completed	<input type="button" value="Execution"/>
<input type="checkbox"/> lik11034	LIK11034	junhong.kim@lgericsson.com	New Account Announcement	1	Completed	<input type="button" value="Execution"/>
<input type="checkbox"/> lik11035	LIK11035	sanghyeok.kwon@lgericsson.com	New Account Announcement	1	Completed	<input type="button" value="Execution"/>
<input type="checkbox"/> lik11036	LIK11036	juhoon.kim@lgericsson.com	New Account Announcement	4	Completed	<input type="button" value="Execution"/>
<input type="checkbox"/> lik11037	LIK11037	jaemin.choi@lgericsson.com	New Account Announcement	4	Completed	<input type="button" value="Execution"/>

Select all items at this page

1 2

#### **Control buttons**

- Search - searches the E-mail Dispatch Result based on User ID and Name in the search box.
- Reload – refreshes this window.
- Delete - deletes selected records.
- Delete All – deletes all of E-mail Dispatch records from the UCS Server Database.
- Execution – initialize E-mail Dispatch related Parameters(Dispatching Trial Number, Status)

### 6.2.10 User Security Property

This function allows administrator to place restrictions on User Security and show who are restricted. Administrator can relax restriction by clicking “Edit” button.



**User Security Property**

All Users
  Search User

User ID	Name	Locked	Disabled	Change Password	
111	test1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="button" value="Edit"/>
1110	1110	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="button" value="Edit"/>
1111	1111	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="button" value="Edit"/>
222	test2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="button" value="Edit"/>
333	test3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="button" value="Edit"/>
4190	4190	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="button" value="Edit"/>
444	test4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="button" value="Edit"/>
bb	bb	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="button" value="Edit"/>
cmuser1	UCS User 1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="button" value="Edit"/>
cmuser10	UCS User 10	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="button" value="Edit"/>

>

**Control buttons**

- Search - searches UCS Client Users based on User ID and Name in the search box.
- Reload – refreshes this window.
- Edit – place/relax restrictions on an user.

**6.2.11 UCS Serviced iPECS Systems**

The PBX System Admin screen defines the *iPECS* systems that are linked to and serviced by the *iPECS UCS Server*. When multiple *iPECS* systems are configured in a distributed network, each system is assigned a Voice Networking (VN) Code digit(s) that is dialed as a prefix to the extension number identifying the specific networked system. In this case, the VN Code must be entered in the PBX System Admin screen so that the *UCS Server* can include the digit when calling a networked system extension.

The screenshot shows a web-based configuration form titled "PBX System". At the top, there are four buttons: "Add", "Delete", "Edit", and "Reload". Below these is a form with the following fields:

- System:** A dropdown menu with "iPECS-LIK" selected.
- Site Name:** A text input field containing "Sales".
- IP Address:** A text input field containing "192.168.123.29" with a green checkmark icon to its right.
- Firewall IP Address:** A text input field that is currently empty, with an unchecked checkbox to its right.
- VN Code:** A text input field containing "76".
- VN Code in Prefix:** Radio buttons for "Yes" (unchecked) and "No" (checked).

At the bottom right of the form, there are three buttons: "Add", "Clear", and "Cancel".

**Control**  
**buttons**

- Add - adds a new system link to the UCS application.
- Delete - deletes a system link to the UCS application.

The screenshot shows a web-based configuration form titled "PBX System". At the top, there are four buttons: "Add", "Delete", "Edit", and "Reload". Below these is a form with the following fields:


- System:** A dropdown menu with "iPECS-MG" selected.
- Site Name:** A text input field containing "Marketing".
- IP Address:** A text input field containing "192.168.123.30" with a green checkmark icon to its right.
- Firewall IP Address:** A text input field that is currently empty, with an unchecked checkbox to its right.
- VN Code:** A text input field containing "77".
- VN Code in Prefix:** Radio buttons for "Yes" (unchecked) and "No" (checked).

At the bottom right of the form, there are four buttons: "Edit Local System", "Update", "Clear", and "Cancel".

- Edit - edits an existing iPECS system link definition.
- Reload - refreshes the current UCS Admin screen.


### 6.2.12 LDAP Server

In the LDAP Server screen the Administrator sets LDAP server information. *UCS Clients* may then query contact information in the LDAP server. There is no limitation of contact records in the LDAP server.

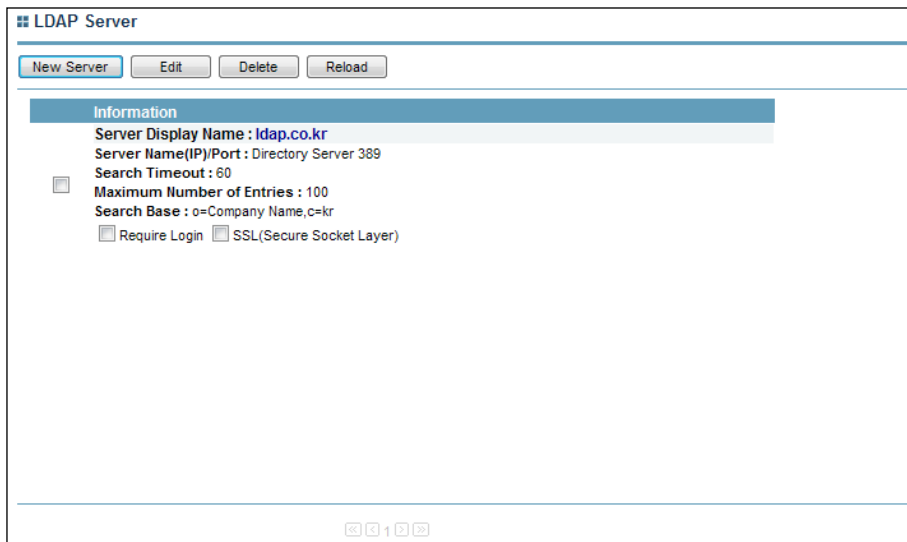

#### **Control buttons**

- New Server - adds a new LDAP server.
- Edit - edits an existing LDAP server.
- Delete - deletes a selected LDAP server.
- Reload - refreshes the current UCS Admin screen.

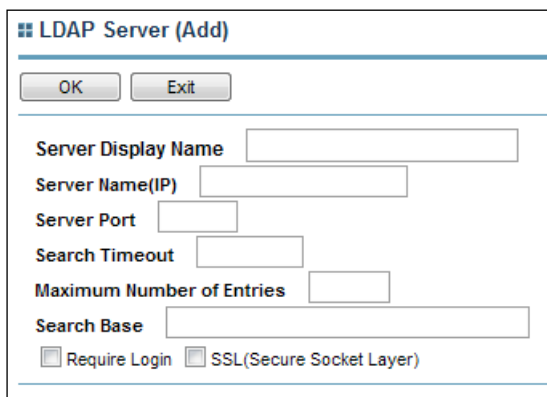

### 6.2.13 Schedule Administrators

*UCS Server* maintains a Private schedule for each user, as well as Shared schedules, which can be viewed only by permitted users. Permitted users are defined for each specific Shared schedule.

**Schedule Administrator**

Add Delete

Schedule Type  
Application Team (Admin) Go to Shared Schedule

User ID
<input type="checkbox"/> ucuser1
<input type="checkbox"/> ucuser10
<input type="checkbox"/> ucuser11
<input type="checkbox"/> ucuser12
<input type="checkbox"/> ucuser13
<input type="checkbox"/> ucuser14
<input type="checkbox"/> ucuser15
<input type="checkbox"/> ucuser2

Navigation icons: back, forward, 1

### **Control buttons**

- Add - allows a user access to the selected Schedule.
- Delete - deletes selected users from accessing the selected Schedule.

To allow a user access to a given Schedule:

1. Select Schedule Type from the drop down menu.
2. Click on the Add button.
3. Select the appropriate User ID.
4. Click Add.

To delete a user from a given Schedule:

1. Select Schedule Type from the drop down menu.
2. Click the checkbox next to the user(s) to be deleted from the Schedule.
3. Click Delete, users checked are deleted.

Schedule Type  
 Application Team (Admin) Go to Shared Schedule

User ID
<input type="checkbox"/> ucuser1
<input type="checkbox"/> ucuser10
<input type="checkbox"/> ucuser11
<input type="checkbox"/> ucuser12
<input type="checkbox"/> ucuser13
<input type="checkbox"/> ucuser14
<input type="checkbox"/> ucuser15
<input type="checkbox"/> ucuser18
<input type="checkbox"/> ucuser2
<input type="checkbox"/> ucuser20

<< 1 2 >>

user  Search User ID Add Clear Cancel

6.2.14 Shared Schedule

In the Shared Schedule screen the Administrator manages shared folder names.

**Shared Schedule**

Add Delete Edit

Folder Name	Creator	Created Date
<input type="checkbox"/> All Schedule	Admin	2008-04-16
<input type="checkbox"/> Branch Office Schedule	Admin	2008-04-16
<input type="checkbox"/> Head Office Schedule	Admin	2008-04-16
<input type="checkbox"/> R&D Center Schedule	Admin	2008-04-16

<< 1 >>

**Shared Schedule (Add)**

OK Exit

Folder Name

**Shared Schedule (Edit)**

OK Exit

Folder Name

**NOTE:** The maximum number of entries in all shared folders is defined in the Properties screen.

### 6.2.15 Properties

*iPECS UCS* has several Properties which can be configured to provide optimum performance in various environments such as the number of users, items in individual databases, etc.

**Property**

Property	Limit	Min:Max Value
Concurrent Clients In Use	<input type="text" value="600"/>	15000
Shared Internal Entries	<input type="text" value="15000"/>	15000
Shared External Entries	<input type="text" value="2000"/>	30000
Usable Client Account	<input type="text" value="15000"/>	15000
Presence Entries	<input type="text" value="200"/>	200
Max Client Notes	<input type="text" value="10"/>	10
File Sending Peers	<input type="text" value="5"/>	5
File Sharing Peers	<input type="text" value="5"/>	5
Web Push Peers	<input type="text" value="5"/>	5
Sharing Frame Interval	<input type="text" value="1500"/> msec	500 ~ 9999
Chat Room (Meet Me)	<input type="text" value="30"/>	30
Chat Room (Ad hoc)	<input type="text" value="100"/>	200
Schedule Folders	<input type="text" value="5"/>	5
Schedule Item	<input type="text" value="65534"/>	65535
ICR Scenarios	<input type="text" value="10"/>	10
File Send Size	<input type="text" value="300"/> MB	300
Max Video Conference Room	<input type="text" value="8"/>	8
Video Quality	<input type="text" value="CIF"/> ▼	
Video Maximum Member	<input type="text" value="5"/>	1 ~ 5
Video Conf Frame (2 members)	<input type="text" value="15"/> ▼	
Video Conf Frame (3 members)	<input type="text" value="8"/> ▼	
Video Conf Frame (4 members)	<input type="text" value="8"/> ▼	
Video Conf Frame (5 members)	<input type="text" value="4"/> ▼	
Video Conf Frame (6 members)	<input type="text" value="8"/> ▼	
Invitation Blocked	<input type="text" value="No"/> ▼	
Statistics Operation	<input type="text" value="Yes"/> ▼	
Organization Chart Use	<input type="text" value="Yes"/> ▼	
Organization Chart Refresh Interval	<input type="text" value="10"/> sec	3 ~ 3600
Minimum Password Length	<input type="text" value="8"/>	1 ~ 12
Must Change Password at First Login	<input type="text" value="Yes"/> ▼	
Must Change Password after Password Initialization	<input type="text" value="Yes"/> ▼	
Do Not Allow the Same Password and User ID	<input type="text" value="No"/> ▼	
Account Lockout after Invalid Login Attempts	<input type="text" value="3"/> time(s)	0 ~ 999
Account Lockout Duration	<input type="text" value="2"/> minute(s)	0 ~ 999
E-mail Dispatch	<input type="text" value="Yes"/> ▼	
E-mail dispatching Count in case of failure	<input type="text" value="5"/> time(s)	0 ~ 999
E-mail dispatching Period in case of failure	<input type="text" value="1"/> minute(s)	0 ~ 999

### Control buttons

- Reload - refreshes the current *UCS Admin* screen.
- Save - saves the current *UCS Admin* screen.

### Properties

- Concurrent Clients In Use - maximum number of simultaneously active (logged-in) Clients permitted.
- Shared Directory Entries - maximum number of records in all Shared directory.
- Usable Client Account - maximum number of Client accounts allowed.
- Presence Entries - maximum number of Clients for User Presence Entries.
- Recent History Item - maximum number of Recent History records for statistics (reserved for future use).
- Max Client Notes - maximum number of Notes that can be stored per user.
- File Sending Peers - maximum number of Clients that can receive a file using File Send.
- File Sharing Peers - maximum number of Clients in a single File Sharing session.
- Web Push Peers - maximum number of Clients in a co-browsing session.
- Sharing Frame Interval - time interval for sending shared files from the Master to other users in a Sharing session.
- Chat Room (MeetMe) - maximum number of IM MeetMe Chat Rooms.
- Chat Room (Adhoc) - maximum number of ad hoc IM Chat sessions.
- Schedule Folders - maximum number of Schedule Folders per user.
- Schedule Item - maximum number of records in a Schedule.
- ICR Scenario Item - maximum number of ICR Scenarios.
- File Send Size - maximum size of a file that can be sent.
- Max Video Conference Room - maximum number of Video Conferences.
- Video Quality – video Resolution available (QCIF/CIF/4CIF)
- Video Maximum Member – maximum members who can participate in (invitor excluded)
- Video Conf Frame - maximum Video frame rate based on number of users in a Video Conference.
- Invitation Blocked - blocked or not if invited user is offline when invited by another user.
- Statistics Operation - yes or no option for Statistics function.
- Organization Chart Use - yes or no option for Organization Chart.
- Organization Chart Refresh Interval - time interval for update organization chart in a UCS Client.
- Minimum Password Length – minimum password length that UCS Client users should enter
- Must Change Password at First Login – If YES, It is necessary for UCS Client users to change their password when they first log in.

- Must Change Password after Password Initialization - If Yes, It is necessary for UCS Client users to change their password when their passwords are initialized.
- Do Not Allow the Same Password and User ID – If Yes, the password that is identical to the User ID is not permitted.
- Account Lockout after Invalid Login Attempts – UCS Client login will be blocked automatically when inappropriate User ID and Password reached to this number.
- Account Lockout Duration – The period of how long will the lockout continue
- E-mail Dispatch – If Yes, E-mail of new account creation will be automatically dispatched to UCS Client users
- E-mail dispatching Count in case of failure – The maximum trial number of E-mail dispatching in case of failure
- E-mail dispatching Period in case of failure – The period of trial of E-mail dispatching in case of failure

**NOTE:** Concurrent Clients in Use must be equal to or less than the Useable Client Accounts. Also, the Shared Directory Entries must be equal to or greater than the Useable Client Accounts and Presence Entries must be equal to or less than the Useable Client Accounts. If these rules are not followed, attempts to store the Properties returns an error message and the Properties are not saved.



### 6.2.16 SIP Parameter

Various parameters associated with Session Initiation Protocol (SIP) handling for both the *UCS Server* and *UCS Client* can be adjusted by the Administrator in the SIP Parameter screen. We recommend that all values in this screen be kept as default.

**SIP Parameter**

Property	Value		Min:Max Value
Server Port	<input type="text" value="25054"/>	port	1024 ~ 49151
NAT Relay Server Port	<input type="text" value="25058"/>	port	1024 ~ 49151
Max Transaction Count	<input type="text" value="5000"/>		1000 ~ 200000
SIP Message Buffer	<input type="text" value="65000"/>	byte	8000 ~ 65000
Activate IP echo Server	<input type="text" value="1"/>	(0:False 1:True)	0 ~ 1
Trans List Delete TimeOut	<input type="text" value="60"/>	sec	10 ~ 120
TCP Relay List Delete TimeOut	<input type="text" value="35"/>	sec	10 ~ 3000
SIP UDP Port	<input type="text" value="25060"/>	port	1024 ~ 49151
SIP TCP Port	<input type="text" value="25060"/>	port	1024 ~ 49151
SIP Worker Thread Count	<input type="text" value="0"/>		0 ~ 20
SIP Message Queue Size	<input type="text" value="1000"/>		32 ~ 3000
Retransmission Timer 1	<input type="text" value="5000"/>	msec	500 ~ 10000
Retransmission Timer 2	<input type="text" value="12000"/>	msec	4000 ~ 20000
Provision Timer	<input type="text" value="180"/>	sec	180 ~ 600
Logging Errors	<input type="text" value="1"/>	(0:False 1:True)	0 ~ 1
Logging Infos	<input type="text" value="0"/>	(0:False 1:True)	0 ~ 1
Logging TCP Relay Info	<input type="text" value="1"/>	(0:False 1:True)	0 ~ 1
Logging SIP Resources	<input type="text" value="0"/>	(0:False 1:True)	0 ~ 1
Logging UCC2UCS All Message	<input type="text" value="0"/>	(0:False 1:True)	0 ~ 1
Logging UCS2UCC All Message	<input type="text" value="0"/>	(0:False 1:True)	0 ~ 1
Session Relay via UCS Server	<input type="text" value="1"/>	(0:False 1:True)	0 ~ 1
User Key to Debug	<input type="text" value="1560"/>		
Gateway IP Address	<input type="text" value="127.0.0.1"/>		

User ID

#### Control buttons

- Reload - refreshes the current *UCS Admin* screen.
- Save - saves the current *UCS Admin* screen.

#### **Properties**

- Server Port - Gateway Server TCP port used for communication with Application Servers.

- NAT Relay Server Port - Gateway Server TCP port UCS Clients use to send TCP streams (IM, File Send and Sharing); the port is used in the NAT environment.
- Max, Transaction Count - maximum number of Gateway Server transactions active at a given time.
- SIP Message Buffer - maximum size for SIP messages received by the Gateway Server.
- Active IP echo Server - defines if the Gateway Server employs multi-cast to notify UCS Clients of the Gateway Server IP Address.
- Trans. List Delete Timeout - Gateway timer to delete a transaction from the transaction list in case no final response message is received for a SIP request.
- TCP Relay List DeleteTimeout - Gateway timer to delete a TCP connection from the TCP relay list in case no final response message is received with a SIP request.
- SIP UDP Port - SIP UDP port on which the UCS Gateway expects to receive SIP messages.
- SIP TCP Port - SIP TCP port on which the UCS Gateway expects to receive SIP messages.
- SIP Worker Thread Count - number of processing threads to be initiated.
- SIP Message Queue Size - maximum length of the processing queue.
- Retransmission Timer 1 - *UCS Client* Invite transaction retransmits request at an interval that starts at T1 seconds.
- Retransmission Timer 2 - general requests are retransmitted at an interval which starts at T1 and doubles until it reaches T2.
- Provision Timer - transaction will stop re-transmission of the Invite request and will wait for a final response for the Provision Timer expires.
- Logging Errors - debug Flag to enable/disable saving error messages to the Gateway Log text file.
- Logging Infos - debug Flag to enable/disable saving information messages to the Gateway Log text file.
- Logging TCP Relay Info - debug Flag to enable/disable saving TCP Relay information messages to the Gateway Log text file.
- Logging SIP Resources - debug Flag to enable/disable saving SIP resource messages to the Gateway Log text file.
- Logging UCC2UC - debug Flag to enable/disable saving *UCS Client* messages sent by the Client to the Gateway Log text file.
- Logging UCS2UCC - debug Flag to enable/disable saving information from *UCS Server* messages to the Gateway Log text file.
- Session Relay via UCS Server – Whether or not all sessions are connected through UCS server. If checked, the session stability is improved.
- User Key to Debug - key value of user for debugging.

- Gateway IP Address - IP Address of PC Gateway program is installed.

### 6.2.17 Timer Settings

In the Periodic Timers screen, various timer settings can be adjusted.

Periodic Timer			
<input type="button" value="Reload"/> <input type="button" value="Save"/>			
Diagnostic Check Interval for Client	<input type="text" value="30"/>	sec	30 (10 ~ 90)
Diagnostic Check Interval for Server Process	<input type="text" value="3"/>	sec	5 (3 ~ 30)

#### Control buttons

- Reload - refreshes the current *UCS Admin* screen.
- Save - saves the current *UCS Admin* screen.

#### Property items

- Diagnostic Check Interval for Client - interval for checking *UCS Client* diagnosis.
- Diagnostic Check Interval for Server Process - interval for checking *UCS Server* process diagnosis.

### 6.2.18 Message Log

*iPECS UCS OMS* logs notice and warning messages. The Administrator can define the Category for each message and assign each message to be reported and saved to the history log. If not saved, a reported message will be deleted from the log after it has been reported.

Warning/Notice Message					
<input type="button" value="Reload"/> <input type="button" value="Save"/>					
Code	Message	Category	Report	Save	
1001	Server Process Started	Notice	<input checked="" type="radio"/> Yes <input type="radio"/> No	<input checked="" type="radio"/> Yes	<input type="radio"/> No
1002	Server Process Stopped	Warning	<input checked="" type="radio"/> Yes <input type="radio"/> No	<input checked="" type="radio"/> Yes	<input type="radio"/> No
1003	Server Process No Answer	Warning	<input checked="" type="radio"/> Yes <input type="radio"/> No	<input checked="" type="radio"/> Yes	<input type="radio"/> No
1101	PBX System Connected	Notice	<input checked="" type="radio"/> Yes <input type="radio"/> No	<input checked="" type="radio"/> Yes	<input type="radio"/> No
1102	PBX System No Answer	Warning	<input checked="" type="radio"/> Yes <input type="radio"/> No	<input checked="" type="radio"/> Yes	<input type="radio"/> No
1103	Presence Service Started	Notice	<input checked="" type="radio"/> Yes <input type="radio"/> No	<input checked="" type="radio"/> Yes	<input type="radio"/> No
1201	ICR Result	Notice	<input checked="" type="radio"/> Yes <input type="radio"/> No	<input checked="" type="radio"/> Yes	<input type="radio"/> No
1202	ICR Fail Report	Warning	<input checked="" type="radio"/> Yes <input type="radio"/> No	<input checked="" type="radio"/> Yes	<input type="radio"/> No
1203	Invalid ICR Request	Warning	<input checked="" type="radio"/> Yes <input type="radio"/> No	<input checked="" type="radio"/> Yes	<input type="radio"/> No
1301	UCS Client No Answer	Warning	<input checked="" type="radio"/> Yes <input type="radio"/> No	<input checked="" type="radio"/> Yes	<input type="radio"/> No

**Control buttons**

- Reload - refreshes the current *UCS Admin* screen.
- Save - saves the current *UCS Admin* screen.

**6.2.19 Admin Level**

The Admin Level screen is employed to define the lowest Admin Level allowed access to each *iPECS UCS Web Admin* screen. Users with a higher-numbered Admin Level are not allowed access to the screen and will receive following message indicating access is denied, “Your Admin Level is not acceptable.” The Download Client Program menu can be assigned for access by Admin Levels 1 to 10; all other screens can be assigned for access by Admin Levels 1 to 5.

**Admin Level**

Web Admin Menu	Admin Level
Shared Directory	1
Schedule Administrator	1
Holiday	1
PBX System	1
Property	1
SIP Parameter	1
Periodic Timer	1
Warning/Notice Message	1
Client Version Compatibility	1
Admin Level	1

**Control buttons**

- Reload - refreshes the current *UCS Admin* screen.
- Save - saves the current *UCS Admin* screen.

**6.2.20 Admin Users**

The Admin User screen defines Admin Users and the Admin Level for each user. Only the Administrator or user with Admin Level 1 may view and modify information on this screen.

**Admin Users**

Admin Users	Admin Level
<input type="checkbox"/> ucuser1	1
<input type="checkbox"/> ucuser10	2
<input type="checkbox"/> ucuser11	4
<input type="checkbox"/> ucuser12	7
<input type="checkbox"/> ucuser13	8
<input type="checkbox"/> ucuser14	10
<input type="checkbox"/> ucuser15	10

**Control buttons**

- Add - adds a new user to the Admin Group and defines Admin Level.

- Delete - deletes a user from the Admin Group.
- Save - saves the current *UCS Admin* screen.
- Reload - refreshes the current *UCS Admin* screen.

To add a user to the Admin Group:

1. Click Add.
2. Select the appropriate User ID.
3. Click Save to accept changes.

To assign or change the level for a user:

1. Select the user by clicking the corresponding check box.
2. Select the desired Admin Level from the drop-down list.
3. Click Save to accept changes.

### 6.2.21 User Password Initialize

The Administrator or users with Admin Level 1 can initialize the password for those who forget their passwords. When initialized, the User ID is employed as the password. To initialize a password:

1. Click on the Initialize button corresponding to the User ID or Name.
2. The Search function can be used to locate the appropriate User ID or Name.

User ID	Name	Initialize Password
ucuser1	UCS User 1	Initialize
ucuser10	UCS User 10	Initialize
ucuser11	UCS User 11	Initialize
ucuser12	UCS User 12	Initialize
ucuser13	UCS User 13	Initialize
ucuser14	UCS User 14	Initialize
ucuser15	UCS User 15	Initialize
ucuser18	UCS User 18	Initialize
ucuser2	UCS User 2	Initialize
ucuser3	UCS User 3	Initialize

### 6.2.22 Client Version Compatibility

The Client Version Compatibility screen displays and manages the version of the *UCS Client*. This screen can only be viewed and modified by the Administrator or users with Admin Level 1.

**Client Version Compatibility**

Allowed Client Version	Device Type
<input type="checkbox"/> B.7Af	Windows (PC)
<input type="checkbox"/> C.0Aa	Windows (PC)
<input type="checkbox"/> 1.0Ah	Windows (Mobile)
<input type="checkbox"/> 1.0Ah	Windows (Mobile)
<input type="checkbox"/> 1.0Ba	Windows (Mobile)
<input type="checkbox"/> 1.0Bb	Windows (Mobile)
<input type="checkbox"/> A.0Aa	Android (Mobile)

**Control buttons**

- Add - used to add Client versions
- Delete - used to delete Client versions
- Edit - used to modify the current *UCS Admin* screen.
- Reload - refreshes the current *UCS Admin* screen.

**6.2.23 ICR Time Option**

The ICR Option screen defines the Work and Off times as well as days in the work-week. This screen can only be viewed and modified by the Administrator or users with Admin Level 1.

**ICR Time Option**

Office Hour Start (HH:MM:SS)

Office Hour End (HH:MM:SS)

Work Day Information  Monday  Tuesday  Wednesday  Thursday  Friday  Saturday  Sunday

**Control buttons**

- Reload - refreshes the current *UCS Admin* screen.
- Save - saves the current *UCS Admin* screen.

**Property items**


- Office Hour Start - start time, work begins.
- Office Hour Stop - end time, work ends.



- Work Day Information - separate check boxes for work days.

### 6.2.24 ICR Holiday Assignment

In the Holiday Admin screen, yearly holidays are defined for the ICR function; these dates are used as holidays in the Client ICR definitions.

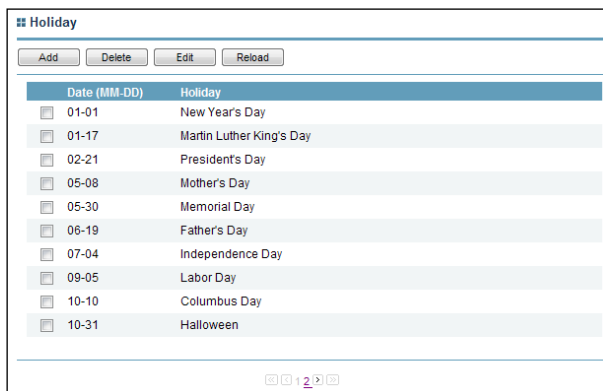


**NOTE:** These holiday assignments are not related to *UCS* scheduling functions.

#### Control buttons

- Add - adds a new Holiday.
- Delete - deletes a selected Holiday.
- Edit - modifies the definition for an existing Holiday.
- Reload - refreshes the current *UCS Admin* screen.

### 6.2.25 Audio Setting By Mobile User

In the Audio Setting By Mobile User screen, the administrator can adjust voice quality for each user by changing parameters.

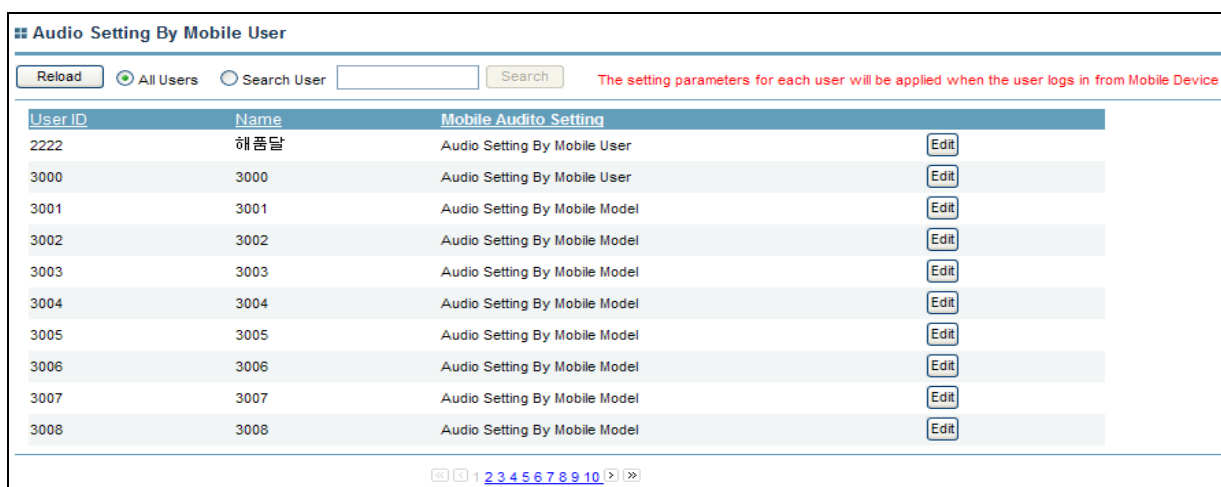


**NOTE:** The setting parameters for each user will be applied when the user logs in from Mobile Device.

**Control buttons**

- Search – returns search results when the Administrator enters a user’s name or ID into that field.
- Edit – moves to editing screen so that the Administrator can adjust voice quality.
- Reload - refreshes the current screen.

6.2.26 Audio Setting By Mobile Phone

In the Audio Setting By Mobile Phone screen, the administrator can adjust voice quality for each phone model by changing parameters.

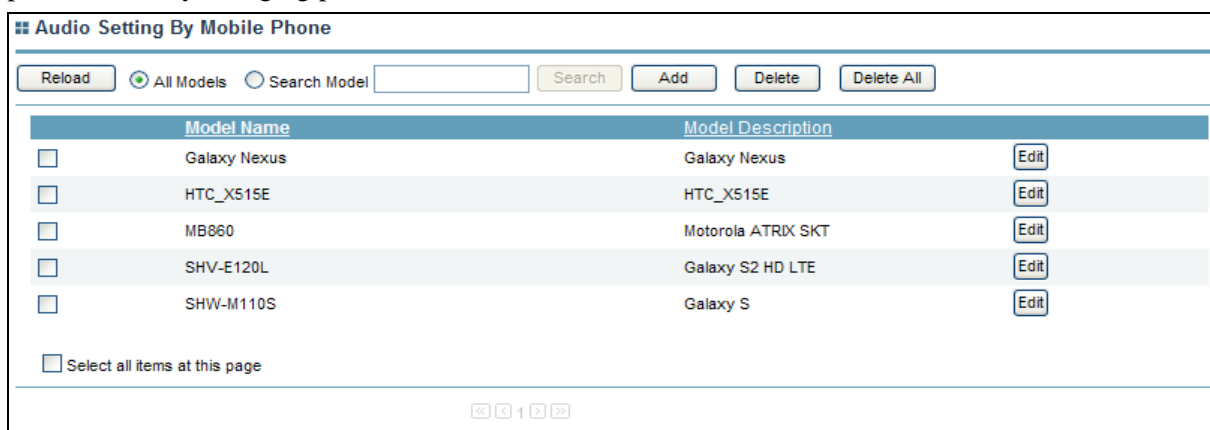

**NOTE:** N/A

**Control buttons**

- Search – returns search results when the Administrator enters Model Name.
- Edit – moves to editing screen so that the Administrator can adjust voice quality.
- Reload - refreshes the current screen.
- Add - add new phone model
- Delete - delete checked model name.
- Delete All - deletes all of phone model information from the UCS Server Database.

6.2.27 Web Link

In the Web Link screen, the Administrator or users with Admin Level 1 can register an external web page to show in the UCS Client. Any URL with a web page height less than 25 pixels can be registered. This function usually is used as a method for collecting web page links for company use. For example, the example shown Company Portal might contain links for web mail, electronic review and approval,

and so on.

**Web Link**

Subject

URL

Parameter Name	Parameter Value
<input type="checkbox"/> userid	User ID
<input type="checkbox"/> name	Name
<input type="checkbox"/> phone	Desktop Phone

**NOTE:** This feature is for site-specific demands. The final URL will consist of the combination with the added parameters. For example, when you want the web page to display in the UCS Client main window the number of unread web mail or waiting documents to be approved, you need to provide your identification information to the linked web mail server or electrical approval server using parameters such as User ID or name.

If there is a web link in the URL field, the related web page is displayed in the UCS Client main window between the main menu and self presence icons & message count area. If this URL field is empty, there is no web page displayed in the UCS Client main window.

**Control buttons**

- Reload - refreshes the current *UCS Admin* screen.
- Save - saves the current *UCS Admin* screen (Subject and URL).
- Add - add a new parameter value.
- Edit - edit a checked parameter value.
- Delete - delete checked parameters.

**6.2.28 Multi Web Link**

In the multi web link screen, the Administrator or users with Admin Level 1 can register not only multiple existing URLs, but also any URLs they made. They also could modify main contents and the color of screen. In order to apply modified parameters, they would register the Multi Web Link URL into the URL filed of the Web Link menu. Then the multi web link URLs would be viewed from the UCS Client. It is also possible for them to control any items of the Multi Web Link by themselves. The example below shows a configuration shot for the Multi Web Link.

**Multi Web Link**

Reload Save Preview

---

**Background**  
 Background Color    Top Horizontal Bar  Bottom Horizontal Bar

---

**Title**  
 Title Text  Title Align   
 Title Font  Size  Color    Italic  Bold  
 Title Image URL

---

**Link**  
 Link Align  Arrange  Image Width  Image Height   
 Link Font  Size   Banner with Title  
 Link Image URL

Link List

Add Delete Edit

	Subject	URL
<input type="checkbox"/>	Google	http://www.google.com
<input type="checkbox"/>	CNN	http://www.cnn.com
<input type="checkbox"/>	ABC	http://www.abc.com
<input type="checkbox"/>	BBC	http://www.bbc.com

<< < 1 > >>

---

**Body**  
 Body Text

Body Font  Position  Body Align   Visible

---

**Bottom**  
 Bottom Text  Bottom Align   
 Bottom Font  Size  Color    Italic  Bold  
 Bottom Image URL

**NOTE:** Any of web pages that contain Active-X or Java Plug-In is prohibited in the Link list of the Multi Web Link, because it could cause unpredictable problems in the UCS client.

**Control buttons**

- Reload - refreshes the current *UCS Admin* screen.
- Save - saves the current *UCS Admin* screen.
- Preview – previews the Multi Web Link in accordance with input parameter values.
- Add - add a new parameter value.
- Edit - edit a checked parameter value.


- Delete - delete a checked parameter.

**Others**

- Background - adjusts a background color, top horizontal bar and bottom horizontal bar.
- Title – adjusts some parameters for the title and font. The title is shown on the top of the Web tab in the UCS Client.
- Link – adds, deletes or modifies any URLs which are given to the Web tab in the UCS Client..
- Body – adjusts contents and font for the body.
- Bottom – adjusts contents and font for the bottom.

The picture below shows a screen shot for the Multi Web Link when users click the Preview button. A new web browser will pop up and it will show any corresponding web page if users click one link among several links below.

In order to apply this kind of Multi Web Link, the Administrator has to copy the URL which is the “<http://10.10.10.10/ucs/Menu/FormMultiWebLink.aspx?userid=administrator>” in this example to the URL filed of the 6.2.21 Web Link menu.

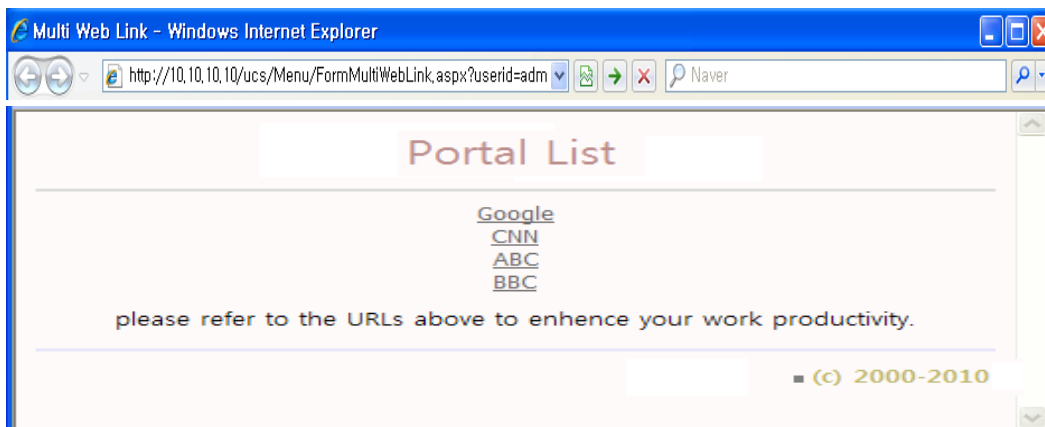

**6.2.29 User Feature Restriction**

The Administrator can limit any functions to every UC Client user. The picture below shows a feature restriction status for entire UCS Client users. A checked box means that its function is available now for its user. On the other hand, any unchecked box means that its function is prohibited for its user. Some number in the screen shot indicates that its user has a limitation to that function. The Administrator could see explanation bubble when he puts his mouse focus on an each item.



**☐ User Feature Restriction Edit**

---

User ID: 
 Name: 
 All Users
  Select All Checkbox

---

<input checked="" type="checkbox"/> Presence Video Status	<input checked="" type="checkbox"/> Allow Call Memo
<input checked="" type="checkbox"/> Presence Schedule Status	<input type="checkbox"/> Allow Call Pickup
<input checked="" type="checkbox"/> Presence Remote Monitorin Status	<input checked="" type="checkbox"/> Allow Meet Me Chatroom
<input checked="" type="checkbox"/> Allow ICR	<input checked="" type="checkbox"/> Allow Application Sharing
<input checked="" type="checkbox"/> Allow Remote Call Forward	<input checked="" type="checkbox"/> Allow Desktop Sharing
<input checked="" type="checkbox"/> Allow Group Call	<input checked="" type="checkbox"/> Allow Whiteboard
<input checked="" type="checkbox"/> Allow Meet Me Conference Call	<input checked="" type="checkbox"/> Allow File Send
<input checked="" type="checkbox"/> Allow Scheduled Dial	<input checked="" type="checkbox"/> Allow Normal Video
<input checked="" type="checkbox"/> Allow Record Call	<input checked="" type="checkbox"/> Allow Video Format QCIF
<input checked="" type="checkbox"/> Allow Flexible Button	<input checked="" type="checkbox"/> Allow Video Format CIF
<input checked="" type="checkbox"/> Allow Voice Mail Selection	<input checked="" type="checkbox"/> Allow Video Format VGA
<input checked="" type="checkbox"/> Allow Step Call	<input checked="" type="checkbox"/> Allow Presentation Mode
<input checked="" type="checkbox"/> Allow Playback Wave File	<input checked="" type="checkbox"/> Allow Remote Monitoring
<input checked="" type="checkbox"/> Allow Send SMS	

Presence Entries  1 ~ 200
 File Send Size  1 ~ 300 MB

ICR Scenarios  1 ~ 10
 Schedule Item  1 ~ 65534

---

Invisible or disable menu/button on UCS Client (Checked:Invisible, Unchecked:Disable)

---

**Control buttons**

- Reload - refreshes the current *UCS Admin* screen.
- Save – saves the current *UCS Admin* screen.
- Enable Template – shows a reserved template. It will be applied to the user if the Administrator clicks the Apply button.

The unchecked function among all of supported functions will not be seen in the UCS client program if the Administrator selects the “Invisible or disable menu/button on UCS Client”. On the other hand, if he does not select the “Invisible or disable menu/button on UCS Client”, even though the unchecked function will be seen in the UCS Client program, the UCS Client user could not use that function, because the function becomes still disable.

**NOTE:** The user feature restriction will never be applied to the UCS Client user before he log-in again

if the Administrator limits some functions to him as long as he already logged-in. Regarding Presence entries, File Send Size, ICR Scenarios and Schedule Item, the maximum value for them can be chosen within their predefined ranges.

### 6.2.30 Restriction Template

By default, the UCS supports five reserved templates. The Administrator could apply it for each UCS Client by selecting one of five templates.

#### Restriction Template

Reload
Save

---

Template 1  Select All Checkbox

---

Subject Level 1 (Higest)

<input checked="" type="checkbox"/> Presence Video Status	<input checked="" type="checkbox"/> Allow Call Memo
<input checked="" type="checkbox"/> Presence Schedule Status	<input type="checkbox"/> Allow Call Pickup
<input checked="" type="checkbox"/> Presence Remote Monitorin Status	<input checked="" type="checkbox"/> Allow Meet Me Chatroom
<input type="checkbox"/> Allow ICR	<input checked="" type="checkbox"/> Allow Application Sharing
<input checked="" type="checkbox"/> Allow Remote Call Forward	<input checked="" type="checkbox"/> Allow Desktop Sharing
<input checked="" type="checkbox"/> Allow Group Call	<input checked="" type="checkbox"/> Allow Whiteboard
<input checked="" type="checkbox"/> Allow Meet Me Conference Call	<input checked="" type="checkbox"/> Allow File Send
<input checked="" type="checkbox"/> Allow Scheduled Dial	<input checked="" type="checkbox"/> Allow Normal Video
<input checked="" type="checkbox"/> Allow Record Call	<input checked="" type="checkbox"/> Allow Video Format QCIF
<input checked="" type="checkbox"/> Allow Flexible Button	<input checked="" type="checkbox"/> Allow Video Format CIF
<input checked="" type="checkbox"/> Allow Voice Mail Selection	<input checked="" type="checkbox"/> Allow Video Format VGA
<input checked="" type="checkbox"/> Allow Step Call	<input checked="" type="checkbox"/> Allow Presentation Mode
<input checked="" type="checkbox"/> Allow Playback Wave File	<input checked="" type="checkbox"/> Allow Remote Monitoring
<input checked="" type="checkbox"/> Allow Send SMS	

Presence Entries <input style="width: 80px;" type="text" value="200"/> 1 ~ 200	File Send Size <input style="width: 80px;" type="text" value="200"/> 1 ~ 300 MB
ICR Scenarios <input style="width: 80px;" type="text" value="10"/> 1 ~ 10	Schedule Item <input style="width: 80px;" type="text" value="1000"/> 1 ~ 65534

---

Invisible or disable menu/button on UCS Client (Checked:Invisible, Unchecked:Disable)

#### Control buttons

- Reload - refreshes the current *UCS Admin* screen.
- Save – saves the current *UCS Admin* screen.

**NOTE:** The user feature restriction will never be applied to the UCS Client user before he log-in again



if the Administrator limits some functions to him as long as he already logged-in. Regarding Presence entries, File Send Size, ICR Scenarios and Schedule Item, the maximum value for them can be chosen within their predefined ranges.

### 6.2.31 Status

Status information consists of Client Status, Server Status, PBX Status, Current Login User Status, and Call Connection Status.

#### 6.2.31.1 Client Status

The Client Status screen shows all information of registered *UCS client* users. In this screen you can view the VN code, Desktop Phone, User ID, Name, Nickname, Department, Version and Presence status. The screen displays All Users or only users that are logged in (Login Users).

**Client Status**

Reload  All Users  Login User  Periodic Update [Account 140, Login 1]

VM Code	Desktop Phone	User ID	Name	Nickname	Department	Version	
48	4109	<a href="#">ucuser10</a>	UCS User 10	UCS User 10	BCS	2.0Ae	
48	4110	<a href="#">ucuser11</a>	UCS User 11	UCS User 11	BCS	2.0Ae	
48	4111	<a href="#">ucuser12</a>	UCS User 12	UCS User 12	BCS	2.0Ae	
48	4112	<a href="#">ucuser13</a>	UCS User 13	UCS User 13	BCS	2.0Ae	
48	4113	<a href="#">ucuser14</a>	UCS User 14	UCS User 14	Application	2.0Ae	
48	4022	<a href="#">ucuser15</a>	UCS User 15	UCS User 15	Application	2.0Ae	
48	4117	<a href="#">ucuser18</a>	UCS User 18	UCS User 18	BCS	2.0Ae	
48	4101	<a href="#">ucuser2</a>	UCS User 2	UCS User 2	BCS	2.0Ae	
48	4102	<a href="#">ucuser3</a>	UCS User 3	UCS User 3	BCS	2.0Ae	
48	4103	<a href="#">ucuser4</a>	UCS User 4	UCS User 4	BCS	2.0Ae	

10 20 50 100 500 Items per one page

<< 11 12 13 14 >>

**Client Status**

Reload  All Users  Login User  Periodic Update [Account 140, Login 2]

VM Code	Desktop Phone	User ID	Name	Nickname	Department	Version	
48	4100	<a href="#">ucuser1</a>	UCS User 1	UCS User 1	BCS	2.0Ae	
48	4108	<a href="#">ucuser9</a>	UCS User 9	UCS User 9	BCS	B.0Ac	

10 20 50 100 500 Items per one page

<> + <>

**NOTE:** If Periodic Update is set, the page is reloaded every 5 seconds.

To view detailed information of a particular user Click on the User ID link.

**User Information**

User ID:  Reload

Name:

Nickname:

Desktop Phone:    Cellular Phone:

Office Name:  Office Department:

Office Phone:  Office Fax:

Office Address:

Home Phone:  Home Address:

Email:

**6.2.31.2 Server Status**

The Server Status screen shows current status of UCS Servers.

- Green - indicates normal status
- Red - indicates a fault or abnormal status.

**Server Status**

Reload

Gateway: 150.150. [redacted]

Database: 150.150. [redacted]

Application

- Chatting: 150.150. [redacted]
- Diagnosis: 150.150. [redacted]
- Directory: 150.150. [redacted]
- ICR Presence: 150.150. [redacted]

### 6.2.31.3 PBX Status

The PBX Status screen shows current status of *iPECS* system(s) registered to *UCS Server*. In this screen you can view Site Name, IP Address, Version, Capacity, License, Mobile License, VN Code and Date/Time. A Green colored square indicates normal status, and a Red colored square indicates a fault or abnormal status.

**PBX Status**

Reload

**Information**

- Site Name : AppPart CM
- IP Address :                      Version : 30M-C.1Dc
- Capacity : 30000    License : 30000    Mobile License : 30000    VN Code : 2
- Date/Time : 2012/07/12 03:23:48
- Site Name : Europe
- IP Address :                      Version : 95M-F.0Ar
- Capacity : 70    License : 20    Mobile License : 40    VN Code : 1
- Date/Time : 2012/07/13 10:59:20

### 6.2.31.4 Current Login User List

The Current Login User List screen displays information on the current logged in users. In this screen you can view User ID, Name, Operating System, Public IP, Private IP, NAT, Relay, and Date/Time for each logged in user.

**Current Login User List**

Reload    All Users    Search User     Search

User ID	Name	Operating System	Public IP	Private IP	NAT Relay	Date	Time
cmuser1	cmuser1	Windows XP			<input type="checkbox"/> <input checked="" type="checkbox"/>	2010-06-21	13:47:14
cmuser11	cmuser11	Windows XP			<input type="checkbox"/> <input type="checkbox"/>	2010-06-21	13:24:01

**NOTE:**

- Public IP addresses are IP addresses that are visible to the public. Because these IP addresses are public, they allow other network devices to know about and access your computer, like a Web server. The Public IP address shows the *UCS Client* PC’s Public IP address.
- Private IP addresses are used on a private network, but they can not be routed through the public Internet. This creates a measure of security and it saves limited IP addresses. The Private IP address shows the *UCS Client* PC’s Private IP address.
- Network Address Translation (NAT), also known as network masquerading, native address translation or IP masquerading, is a technique of transceiving network traffic through a router that involves re-writing the source and/or destination IP addresses and usually the TCP/UDP

port numbers of IP packets as they pass through. The NAT checkbox shows whether *UCS Client* PC is using NAT.

- *UCS Client* can be connected to the *UCS Server* using Relay mode. In Relay mode, *UCS Server* relays *UCS* services such as IM, File Send, Sharing, to each *UCS Client* end. The mode is automatically configured by *UCS Client* but, the *UCS Client* can be manually adjusted for relay operation.

**6.2.31.5 Call Connection Status**

The Call Connection Status screen shows current connected call information. In this screen you can view User ID, Name, Result Code, PBX IP Address, Firewall, Remote, Phone Number and Connected Number.

User ID	Name	Result Code	PBX IP Address	Firewall	Remote	Phone Number	Connected Number
ucuser2	UCS User 2	0	192.168.131.18	No	Remote	4101	4101
ucuser9	UCS User 9	0	192.168.131.18	No	Remote	4108	4108

**Result Code**

- 0 - Success
- 1 -MAC and ID are Empty
- 2 -MAC is Default
- 3 -Registration Dip S/W is Protected
- 4 -Empty or Not Matching MAC
- 5 -Remote Password Not Matched
- 6 -Remote Registered Device Login Fail
- 7 -Not Allowed Device Registration Information
- 8 -SLT is Not Allowed for Remote Linked Station
- 9 -User Login Password does Not Match


- 10 -User Login Identity is Not Registered
- 11 - New Registration by User Login Identity
- 12 -Unresolved Master Slave Identification
- 13 - Abnormal by System 003
- 14 - Extension Logical Number Cannot be Assigned
- 15 - Extension Logical Number Cannot be Assigned
- 19 - No License, Please Contact Your Local Dealer
- 20 - *UCS Client* Identity
- 21 - Linked Pair Login Failed by Previous Link
- 22 - Wrong Device Type
- 23 - Linked Pair Station is Not Idle State
- 25 - No Response from System

6.2.32 Report

The reports consist of message, resource and usage logs as well as statistics.


6.2.32.1 Notice Logs

The Notice Logs screen displays a history of notice messages. In this screen you can view Date/Time, Code, Cause, Process, Description and Name. The display can be for all users or searched for a specific user. Also, the display can be searched for a specific code.

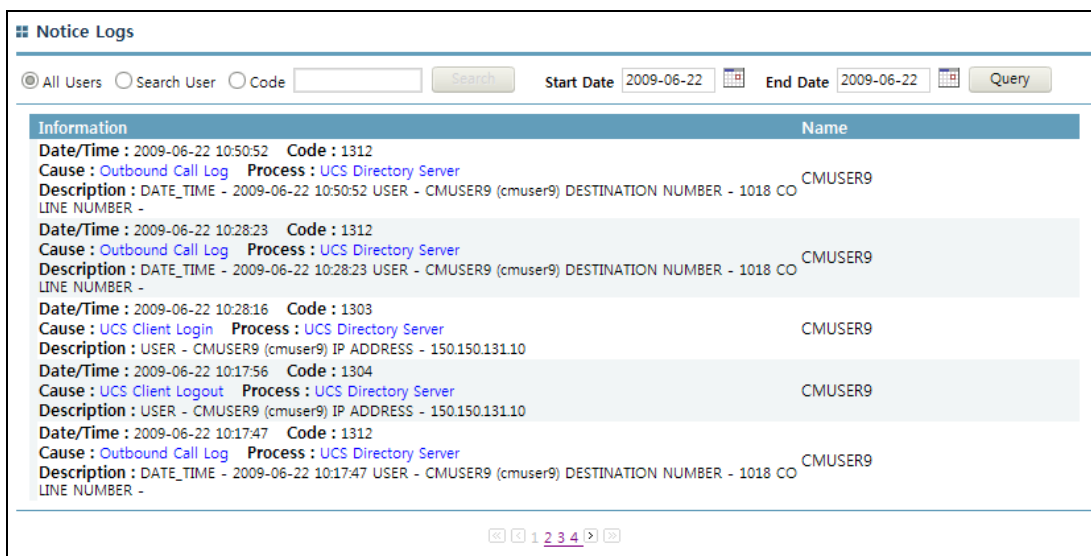

To select a date for display:

1. Click the Calendar icon to the right of the date box.
2. Select the desired date from the Calendar.

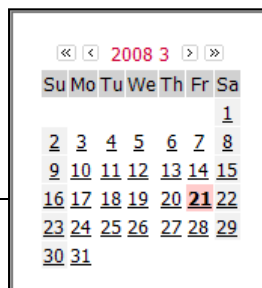

To display the calendar window:

1. Click the calendar icon.
2. Select the date to input.

**NOTE:** The range of query is 30 days.

### 6.2.32.2 Warning Logs

The Warning Logs screen shows the history of warning messages. In this screen you can view Date/Time, Code, Cause, Process, Description and Name. The display can be for all users or searched for a specific user. Also, the display can be searched for a specific code.

**Warning Logs**

All Users
  Search User
  Code 

 Start Date 


 End Date

Information	Name
<b>Date/Time :</b> 2009-06-22 10:59:27 <b>Code :</b> 1702 <b>Cause :</b> Desktop Phone Number Mismatch <b>Process :</b> UCS Client <b>Description :</b> USER - CMUSER21 (cmuser21) PBX IP ADDRESS - 192.168.123.196 DESKTOP PHONE NUMBER - 1021 CONNECTED NUMBER - RESET	CMUSER21
<b>Date/Time :</b> 2009-06-22 10:59:26 <b>Code :</b> 1702 <b>Cause :</b> Desktop Phone Number Mismatch <b>Process :</b> UCS Client <b>Description :</b> USER - CMUSER21 (cmuser21) PBX IP ADDRESS - 192.168.123.196 DESKTOP PHONE NUMBER - 1021 CONNECTED NUMBER -	CMUSER21
<b>Date/Time :</b> 2009-06-22 09:50:25 <b>Code :</b> 1302 <b>Cause :</b> UCS Client Re-Login <b>Process :</b> UCS Directory Server <b>Description :</b> USER - CMUSER9 (cmuser9) IP ADDRESS (BEFORE) - 150.150.149.91 IP ADDRESS (AFTER) - 150.150.131.10	CMUSER9
<b>Date/Time :</b> 2009-06-22 09:49:37 <b>Code :</b> 1701 <b>Cause :</b> Call Connection Fail <b>Process :</b> UCS Client <b>Description :</b> USER - CMUSER9 (cmuser9) DESKTOP PHONE NUMBER - 1019 CAUSE - No Response from System PBX IP ADDRESS (LOCAL) - PBX IP ADDRESS (FIREWALL) -	CMUSER9
<b>Date/Time :</b> 2009-06-22 09:48:32 <b>Code :</b> 1701 <b>Cause :</b> Call Connection Fail <b>Process :</b> UCS Client <b>Description :</b> USER - CMUSER9 (cmuser9) DESKTOP PHONE NUMBER - 1019 CAUSE - No Response from System PBX IP ADDRESS (LOCAL) - PBX IP ADDRESS (FIREWALL) -	CMUSER9

**NOTE:** The range of query is 30 days.

### 6.2.32.3 Call Logs

The Call Logs screen shows the history of *UCS Client* calls. In this screen you can view Date/Time, Peer Name, Number, CO and Name. The call type can be selected from the radial buttons as All, Incoming, Outgoing and Conference Room. The display can be for all users or searched for a specific user.

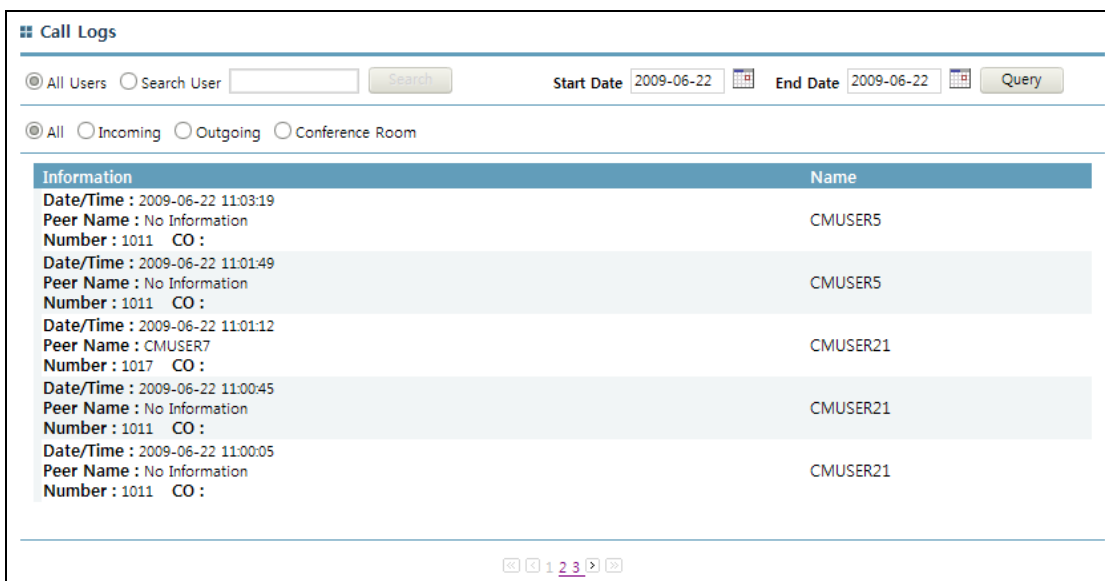

**NOTE:** The range of query is 30 days.

### 6.2.32.4 Usage Logs

The Feature Usage Logs screen shows a history of features used. In this screen you can view Date/Time, Peer Name, Type (name of feature) and Name. The feature Type can be selected from the radial buttons and include All, IM, Sharing, File Send, Web Push and Video. The display can be for all users or searched for a specific user.

**Feature Usage Logs**

All Users    Search User    
 Start Date    
 End Date    

All  
  IM  
  Sharing (Application)  
  Sharing (Desktop)  
  Whiteboard  
  File Send  
  Web Push  
  Video  
  Presentation  
  Remote Monitoring

Information	Type	Name
Date/Time : 2009-06-09 17:59:17 Peer Name : ucs user 3	Presentation	ucs user 2
Date/Time : 2009-06-09 17:59:17 Peer Name : ucs user 2	Presentation	ucs user 3
Date/Time : 2009-06-09 17:59:00 Peer Name : ucs user 1	Presentation	ucs user 2
Date/Time : 2009-06-09 17:59:00 Peer Name : ucs user 2	Presentation	ucs user 1
Date/Time : 2009-06-09 17:51:45 Peer Name : ucs user 1	Presentation	ucs user 2
Date/Time : 2009-06-09 17:51:45 Peer Name : ucs user 2	Presentation	ucs user 1
Date/Time : 2009-06-09 17:51:24 Peer Name : ucs user 2	Presentation	ucs user 3

1 2 3 4 5 6 7 8 9 10

**NOTE:** The range of query is 30 days.

### 6.2.32.5 File Send Logs

The File Send Logs screen shows detailed history for the file sending feature. In this screen you can view File Sender, Receiver, File Name, File Size and Date & Time. The display can be for all users or searched for a specific user.

**File Send Logs**

All Users    Search User    
 Start Date    
 End Date    

Sender	Receiver	File Name	File Size(KB)	Date & Time
UCS User 9	UCS User 1	UCSCClient.exe	21170980	2008-04-04 16:28:04
UCS User 9	UCS User 3	VistaUACandDelphi.ppt	4365312	2008-04-04 16:28:03
UCS User 1	UCS User 3	UCSCClient.exe	21170980	2008-04-04 16:28:02
UCS User 3	UCS User 9	VistaUACandDelphi.ppt	4365312	2008-04-04 16:28:01
UCS User 1	UCS User 9	HIAS_Manual_20030929(LG).doc	3856896	2008-04-04 16:28:01
UCS User 3	UCS User 9	UCSCClient.exe	21170980	2008-04-04 16:28:00
UCS User 3	UCS User 9	UCSCClient.exe	21170980	2008-04-04 16:19:08
UCS User 3	UCS User 9	UCSCClient.exe	21170980	2008-04-04 16:19:08
UCS User 3	UCS User 10	UCSCClient.exe	21170980	2008-04-04 16:19:07
UCS User 3	UCS User 4	UCSCClient.exe	21170980	2008-04-04 16:19:07

1 2 3 4 5 6 7 8 9

**NOTE:** The range of query is 30 days.

### 6.2.32.6 Presence Member

The Presence Member screen shows the counts of presence members that are registered in the Presence window for each UCS Client. The display can be for all users or searched for a specific user.



**Presence Member**

All Users  Search User

User ID	Name	Presence Member Count	Blocked Member Count
ucuser9	UCS User 9	55	1
ucuser10	UCS User 10	17	
ucuser5	UCS User 5	16	
ucuser11	UCS User 11	12	
ucuser6	UCS User 6	10	
ucuser4	UCS User 4	10	
ucuser1	UCS User 1	10	
ucuser13	UCS User 13	9	
ucuser2	UCS User 2	9	
ucuser8	UCS User 8	8	

⏪ 1 2 ⏩

**NOTE:** Information is arranged in order by counts of the Presence Member Count column.

**6.2.32.7 ICR Scenario Resource**

The ICR Scenario screen shows the number of ICR scenarios that are registered for each *UCS Client*. The display can be for all users or searched for a specific user.

**ICR Scenario Resource**

All Users  Search User

User ID	Name	ICR Scenario Count
ucuser11	UCS User 11	10
ucuser15	UCS User 15	8
ucuser5	UCS User 5	8
ucuser2	UCS User 2	6
ucuser3	UCS User 3	5
ucuser13	UCS User 13	5
ucuser12	UCS User 12	4
ucuser4	UCS User 4	3
ucuser7	UCS User 7	3
ucuser8	UCS User 8	3

⏪ 1 2 ⏩

**6.2.32.8 Unread Note**

The Unread Note screen shows the number of the unread notes for each *UCS Client*. The display can be for all users or searched for a specific user.

**Unread Note**

All Users  Search User

User ID	Name	Unread Note Count
ucuser18	UCS User 18	8
ucuser12	UCS User 12	8
ucuser11	UCS User 11	6
ucuser10	UCS User 10	5
ucuser2	UCS User 2	4
ucuser8	UCS User 8	2
ucuser7	UCS User 7	2
ucuser1	UCS User 1	1

⏪ ⏩ 1 ⏪ ⏩

**6.2.32.9 Private Schedule**

The Private Schedule screen shows the number of schedules registered by each *UCS Client*. The display can be for all users or searched for a specific user.

**Private Schedule**

All Users  Search User

User ID	Name	Private Schedule Count
ucuser5	UCS User 5	39
ucuser4	UCS User 4	23
ucuser3	UCS User 3	20
ucuser15	UCS User 15	16
ucuser9	UCS User 9	12
ucuser1	UCS User 1	5
ucuser11	UCS User 11	2
ucuser10	UCS User 10	2
ucuser12	UCS User 12	1
ucuser18	UCS User 18	1

⏪ ⏩ 1 2 ⏪ ⏩

**6.2.32.10 SIP Stack Resource Usage**

The SIP Stack Resource Usage screen shows a count of use for each SIP resource. This screen is useful to troubleshoot a SIP protocol issues between Gateway server and clients.

# SIP Stack Resource Usage

Reload

Resource Name	Current	Max	Allocated
Stack General Pools	7	100	7532
Stack Message Pool	6	100	12500
Stack Header Pool	0	0	4154
Stack Timer Pool	0	115	10080
Transactions	6	99	5000
Transmitters	6	99	5010
Reg Clients	0	0	2
Transport Connections	0	0	0
Transport ConnHash	0	0	0
Transport OwnerHash	0	0	0
Transport pQueueEvents	0	19	1000
Transport pQueueElements	0	19	1000
Transport ReadBuffers	0	2	50
Transport TlsSessions	0	0	0
Transport TlsEngines	0	0	0
Transport oorEvents	0	0	75
Call Legs Calls	0	0	10
Call Legs TransLists	0	0	10
Call Legs TransHandles	0	0	5000
Subs Subscriptions	0	0	0
Subs Notifications	0	0	0
Subs NotifyLists	0	0	0
Application Pool	3	22	40000

**Property items**

- Stack General Pools - General Pools of SIP Stack module
- Stack Message Pool - Message Pools of SIP Stack module
- Stack Header Pool - Header Pools of SIP Stack module
- Stack Timer Pool - Timer Pools of SIP Stack module
- Transactions - Transaction module
- Transmitters - Transmitter module
- Reg Clients - Registered Client module
- Transport Connections - Connection resources of the Transport module
- Transport ConnHash - ConnHash resources of the Transport module
- Transport OwnerHash - OwnerHash resources of the Transport module

- Transport pQueueEvents - pQueueEvents resources of the Transport module
- pQueueElements -pQueueElements resources of the Transport module
- Transport ReadBuffers -ReadBuffers resources of the transport module
- Transport TlsSessions - TlsSessions resources of the transport module
- Transport TlsEngines - TlsEngines resources of the transport module
- Transport oorEvents -oorEvents resources of the transport module
- CallLegs Calls - Calls resource of the Call module
- CallLegs TransLists -TransLists resource of the Call module
- CallLegs TransHandles -TransHandles resource of the Call module
- Subs Subscriptions -Subscription resource of the Subscription module
- Subs Notifications -Notification resource of the Subscription module
- Subs NotifyLists -Notifylist resource of the Subscription module
- Application Pool-Resource of Application module

#### 6.2.32.11 Warning Statistics

The Warning Statistics screen shows the number of warning events that occur in the *UCS Server* daily or monthly. You can select to view All User or Selected User data as well as daily or monthly information. In the daily display, data is arranged hourly and in the monthly display, data is arranged daily. In addition, if Hide rows with no data are selected, the applicable rows are not displayed.

**Warning Statistics**

All Users    Search User

Daily    Monthly   2008-04-08       Hide rows that have no data

Time	1002	1003	1102	1202	1203	1301	1302	1305	1501	1601	1602	1701	1702	Total
00:00 ~ 01:00	0	0	0	0	0	8	4	0	0	0	0	0	0	12
01:00 ~ 02:00	0	0	0	0	0	1	0	0	0	0	0	0	0	1
09:00 ~ 10:00	0	0	0	0	0	0	2	0	0	0	0	0	0	2
10:00 ~ 11:00	0	0	0	0	0	4	0	1	0	0	0	0	0	5
11:00 ~ 12:00	0	0	0	0	0	1	0	0	0	0	0	0	0	1
12:00 ~ 13:00	0	0	1	0	0	1	1	0	0	0	0	0	0	3
13:00 ~ 14:00	0	0	1	0	0	0	0	7	0	0	0	0	0	8
14:00 ~ 15:00	0	0	2	0	0	2	3	0	0	0	0	0	0	7
15:00 ~ 16:00	0	0	3	0	0	2	2	1	0	0	0	1	6	15
16:00 ~ 17:00	0	0	0	0	0	5	4	1	0	0	0	8	8	26
17:00 ~ 18:00	0	0	2	0	0	3	2	3	0	0	0	3	6	19
18:00 ~ 19:00	0	0	0	0	0	1	0	0	0	0	0	0	0	1
19:00 ~ 20:00	0	0	0	0	0	4	0	0	0	0	0	0	0	4
21:00 ~ 22:00	0	0	0	0	0	1	0	0	0	0	0	0	0	1
<b>Total</b>	<b>0</b>	<b>0</b>	<b>9</b>	<b>0</b>	<b>0</b>	<b>33</b>	<b>18</b>	<b>13</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>12</b>	<b>20</b>	<b>105</b>

**All Users/Daily**

**Warning Statistics**

All Users  Search User

Daily  Monthly 2008-04-08   Hide rows that have no data

Day	1002	1003	1102	1202	1203	1301	1302	1305	1501	1601	1602	1701	1702	Total
1	0	0	5	0	0	10	10	0	0	0	0	0	0	25
2	0	3	38	9	0	4	4	20	0	0	0	21	0	99
3	0	0	20	19	0	3	5	16	0	0	0	24	0	87
4	0	0	1	0	0	11	5	0	0	0	0	1	2	20
6	0	0	1	0	0	17	16	1	0	0	0	2	0	37
7	1	1	2	0	0	15	22	8	0	0	0	2	0	51
8	0	0	9	0	0	33	18	13	0	0	0	12	20	105
9	0	0	6	0	0	0	2	0	0	0	0	7	6	21
10	0	0	2	0	0	3	5	2	0	0	0	0	0	12
11	0	2	3	0	0	0	0	1	0	0	0	0	0	6
14	0	0	1	0	0	5	1	1	0	0	0	59	0	67
15	0	0	3	0	0	0	2	1	0	0	0	4	0	10
16	0	0	5	0	0	0	2	2	0	0	0	2	9	20
<b>Total</b>	<b>1</b>	<b>6</b>	<b>96</b>	<b>28</b>	<b>0</b>	<b>101</b>	<b>92</b>	<b>65</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>134</b>	<b>37</b>	<b>560</b>

All Users/Monthly

**Warning Statistics**

All Users  Search User UCS User 1(ucuser1)

Daily  Monthly 2008-04-08   Hide rows that have no data

Day	1002	1003	1102	1202	1203	1301	1302	1305	1501	1601	1602	1701	1702	Total
4	0	0	0	0	0	0	1	0	0	0	0	1	0	2
7	0	0	0	0	0	0	1	0	0	0	0	0	0	1
14	0	0	0	0	0	0	1	0	0	0	0	0	0	1
15	0	0	0	0	0	0	1	0	0	0	0	0	0	1
<b>Total</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>4</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>5</b>

Searched User/Monthly

**Control buttons**

- Export -exports queried data to CSV formatted document.

The figure below is the screenshot of the exported CSV document shown in spreadsheet format.

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
1	Daily : 2008-04-08 : All Users															
2	Time	1002	1003	1102	1202	1203	1301	1302	1305	1501	1601	1602	1701	1702	Total	
3	00:00 ~ 01:00	0	0	0	0	0	8	4	0	0	0	0	0	0	12	
4	01:00 ~ 02:00	0	0	0	0	0	1	0	0	0	0	0	0	1		
5	02:00 ~ 03:00	0	0	0	0	0	0	0	0	0	0	0	0	0		
6	03:00 ~ 04:00	0	0	0	0	0	0	0	0	0	0	0	0	0		
7	04:00 ~ 05:00	0	0	0	0	0	0	0	0	0	0	0	0	0		
8	05:00 ~ 06:00	0	0	0	0	0	0	0	0	0	0	0	0	0		
9	06:00 ~ 07:00	0	0	0	0	0	0	0	0	0	0	0	0	0		
10	07:00 ~ 08:00	0	0	0	0	0	0	0	0	0	0	0	0	0		
11	08:00 ~ 09:00	0	0	0	0	0	0	0	0	0	0	0	0	0		
12	09:00 ~ 10:00	0	0	0	0	0	0	2	0	0	0	0	0	2		
13	10:00 ~ 11:00	0	0	0	0	0	4	0	1	0	0	0	0	5		
14	11:00 ~ 12:00	0	0	0	0	0	1	0	0	0	0	0	0	1		
15	12:00 ~ 13:00	0	0	1	0	0	1	1	0	0	0	0	0	3		
16	13:00 ~ 14:00	0	0	1	0	0	0	0	7	0	0	0	0	8		
17	14:00 ~ 15:00	0	0	2	0	0	2	3	0	0	0	0	0	7		
18	15:00 ~ 16:00	0	0	3	0	0	2	2	1	0	0	0	1	15		
19	16:00 ~ 17:00	0	0	0	0	0	5	4	1	0	0	0	8	26		
20	17:00 ~ 18:00	0	0	2	0	0	3	2	3	0	0	0	3	19		
21	18:00 ~ 19:00	0	0	0	0	0	1	0	0	0	0	0	0	1		
22	19:00 ~ 20:00	0	0	0	0	0	4	0	0	0	0	0	0	4		
23	20:00 ~ 21:00	0	0	0	0	0	0	0	0	0	0	0	0	0		
24	21:00 ~ 22:00	0	0	0	0	0	1	0	0	0	0	0	0	1		
25	22:00 ~ 23:00	0	0	0	0	0	0	0	0	0	0	0	0	0		
26	23:00 ~ 24:00	0	0	0	0	0	0	0	0	0	0	0	0	0		
27	Total	0	0	9	0	0	33	18	13	0	0	0	12	105		
28																
29																

**NOTE:**

- Warning codes vary based on settings in the Warning/Notice Message window refer to Section 6.2.14.
- All statistics are enabled if the Statistics Operation option in the Property screen is set to Yes, refer to Section 6.2.11.

**6.2.32.12 Call Statistics**

The Call Statistics screen shows the call log for each *UCS Client* on daily or monthly basis. You can select to view All User or Selected User data as well as daily or monthly information. In the daily display, data is arranged hourly and in the monthly display, data is arranged daily. In addition, if Hide rows that have no data is selected, the applicable rows are not displayed.

**Call Statistics**

All Users  Search User

Daily  Monthly 2008-04-08   Hide rows that have no data

Time	Incoming	Outgoing	Conference	Missed Call	Total
08:00 ~ 09:00	3	7	0	3	13
09:00 ~ 10:00	1	0	0	0	1
10:00 ~ 11:00	2	2	0	1	5
14:00 ~ 15:00	0	3	9	2	14
15:00 ~ 16:00	1	0	6	0	7
16:00 ~ 17:00	0	0	6	0	6
17:00 ~ 18:00	1	23	3	0	27
18:00 ~ 19:00	10	10	0	0	20
19:00 ~ 20:00	28	29	0	1	58
20:00 ~ 21:00	15	15	0	0	30
<b>Total</b>	<b>61</b>	<b>89</b>	<b>24</b>	<b>7</b>	<b>181</b>

**All Users/Daily**

**Call Statistics**

All Users  Search User

Daily  Monthly 2008-04-08   Hide rows that have no data

Day	Incoming	Outgoing	Conference	Missed Call	Total
1	5	8	0	3	16
2	8	63	16	6	93
3	12	40	0	12	64
4	3	20	0	17	40
6	10	20	0	1	31
7	6	16	0	5	27
8	61	89	24	7	181
9	1	2	4	4	11
10	4	4	0	0	8
14	13	17	1	4	35
15	1	6	0	5	12
<b>Total</b>	<b>124</b>	<b>285</b>	<b>45</b>	<b>64</b>	<b>518</b>

**All Users/Monthly**



**6.2.32.13 Feature Usage Statistics**

The Feature Usage Statistics screen shows the number of times each feature was used on a daily or monthly basis. You can select to view All Users or Search User data as well as daily or monthly information. In the daily display, data is arranged hourly and in the monthly display, data is arranged daily. In addition, if Hide rows that have no data is selected, the applicable rows are not displayed.

**Feature Usage Statistics**

All Users    Search User

Daily    Monthly   2008-04-08       Hide rows that have no data

Time	IM	Sharing	File Send	Web Push	Video	Total
00:00 ~ 01:00	129	6	0	0	0	135
01:00 ~ 02:00	2	0	0	0	0	2
08:00 ~ 09:00	10	2	1	3	2	18
09:00 ~ 10:00	63	0	9	0	2	74
10:00 ~ 11:00	66	0	4	2	4	76
11:00 ~ 12:00	6	0	0	0	0	6
12:00 ~ 13:00	0	0	0	0	4	4
13:00 ~ 14:00	2	0	0	0	0	2
14:00 ~ 15:00	10	0	0	0	0	10
15:00 ~ 16:00	4	12	0	0	0	16
16:00 ~ 17:00	18	0	0	0	0	18
17:00 ~ 18:00	20	0	0	0	0	20
18:00 ~ 19:00	16	0	0	0	14	30
19:00 ~ 20:00	63	0	0	0	54	117
20:00 ~ 21:00	30	0	0	0	30	60
Total	439	20	14	5	110	588

**All Users/Daily**

**Feature Usage Statistics**

All Users    Search User

Daily    Monthly   2008-04-08       Hide rows that have no data

Day	IM	Sharing	File Send	Web Push	Video	Total
1	10	2	6	8	41	67
2	10	8	12	7	10	47
3	4	2	0	0	4	10
4	62	0	90	0	52	204
6	78	8	26	305	18	435
7	163	6	16	9	4	198
8	439	20	14	5	110	588
10	260	0	4	0	19	283
14	10	6	0	1	8	25
15	4	2	2	0	0	8
16	2	0	1	0	1	4
<b>Total</b>	<b>1042</b>	<b>54</b>	<b>171</b>	<b>335</b>	<b>267</b>	<b>1869</b>

**All Users/Monthly**

**6.2.32.14 ICR Result Statistics**

The ICR Result Statistics screen shows the number of incoming calls routed with ICR and the routing result on daily or monthly basis. You can select to view All Users or Search User data as well as daily or monthly information. In the daily display, data is arranged hourly and in the monthly display, data is arranged daily. In addition, if Hide rows that have no data is selected, the applicable rows are not displayed.

**ICR Result Statistics**

All Users    Search User

Daily    Monthly   2008-04-08       Hide rows that have no data

Time	Success	Failure	Incoming
08:00 ~ 09:00	1	0	1
13:00 ~ 14:00	9	0	11
14:00 ~ 15:00	9	0	9
<b>Total</b>	<b>19</b>	<b>0</b>	<b>21</b>

**All Users/Daily**

**ICR Result Statistics**

All Users    Search User

Daily    Monthly   2008-04-08       Hide rows that have no data

Day	Success	Failure	Incoming
2	10	9	19
3	6	19	28
7	1	0	1
8	19	0	21
<b>Total</b>	<b>36</b>	<b>28</b>	<b>69</b>

**All Users/Monthly**

**6.2.32.15 Login Count Statistics**

The Login Count Statistics screen shows the number of login counts for each user on daily or monthly basis. You can select to view All Users or Selected User data.

**Login Count Statistics**

All Users  Search User    Daily  Monthly

User ID	Name	Count
ucuser3	UCS User 3	192
ucuser15	UCS User 15	134
ucuser1	UCS User 1	106
ucuser4	UCS User 4	77
ucuser9	UCS User 9	62
ucuser2	UCS User 2	58
ucuser5	UCS User 5	36
ucuser13	UCS User 13	33
ucuser10	UCS User 10	24
ucuser14	UCS User 14	21

<< < 1 2 > >>

**Searched User/Monthly**

**NOTE:** Information is arranged in order by login counts.

### 6.2.33 Download Client Program

The Download Client Program window provides requirement notes and recent changes in the *iPECS UCS Client* application. This page is also used to download the *iPECS UCS Client* software from the *UCS Server*.

To download, perform the following steps:

1. Click the link, “[Click to download UCS Client Program](#)” from the UCS Initial page.
2. A new web page pops up.
3. Choose the UCS Client what you want and click “[Download](#)”; a copy of the file is downloaded to the PC.
4. Once downloaded, install as described in the *iPECS UCS Client* Installer & User Guide.



<b>Download UCS Client Program</b>	
<b>Windows (PC)</b>	<input type="button" value="Download"/>
Install Notes	<ul style="list-style-type: none"><li>Windows 2000, Windows XP, Windows 7 are required. Windows NT/95/98 are not supported.</li><li>Recommended system requirements:<ul style="list-style-type: none"><li>- Pentium IV Processor 2.3 GHz</li><li>- 256MB RAM</li><li>- Min 200MB Free HDD Space</li></ul></li></ul>
<b>Windows (Mobile)</b>	<input type="button" value="Download"/>
Install Notes	<ul style="list-style-type: none"><li>Windows Mobile 6.1 or 6.5 is required.</li></ul>
<b>Android (Mobile)</b>	<input type="button" value="Download"/>
Install Notes	<ul style="list-style-type: none"><li>The installation package is optimized with Android 2.3(Gingerbread). Previous versions are not supported.</li></ul>

<b>Outlook Plugin</b>	<input type="button" value="Download"/>
Install Notes	<ul style="list-style-type: none"><li>This Plugin allows to make a call from Outlook contact</li></ul>
<b>Jabra PC Suite</b>	<input type="button" value="Download"/>
Install Notes	<ul style="list-style-type: none"><li>It allows for Jabra Headsets to be compatible with UCS</li></ul>
<b>Plantronics</b>	<input type="button" value="Download"/>
Install Notes	<ul style="list-style-type: none"><li>It allows for Plantronics Headsets to be compatible with UCS</li></ul>

## 7. Trouble Shooting

### 7.1 Windows Firewall Settings

Windows Firewall is a built-in, host-based, stateful firewall that is included in Windows Vista, Windows 7, Windows Server 2008, Windows XP with Service Pack 2 and later, and Windows Server 2003 with Service Pack 1 and later. Windows Firewall drops incoming traffic that does not correspond to either traffic sent in response to a request of the computer (solicited traffic) or unsolicited traffic that has been specified as allowed (excepted traffic). Windows Firewall helps provide protection from malicious users and programs that rely on unsolicited incoming traffic to attack computers.

The firewall may block a program or a service if the following conditions are true:

- Server process does not respond to a Client request.
- A Web server, such as Internet Information Services (IIS) responds to client requests.

A Windows Security Alert notifies you that the firewall is blocking a particular program.



When this occurs, you may unblock the program by selecting **Unblock**, which creates a temporary exception.

You can configure the firewall to add a permanent exception for specific ports and programs. When you add a program to the exception list, you enable the firewall to open a range of ports that could change every time the program is run. To add a program exception, perform the following steps:

1. Use an Administrator account to log on to the PC.
2. In the Control Panel, click on Windows Firewall.
3. Click the Exceptions tab.

4. On the Exceptions screen, click on Add Program.
5. In the list of programs, click the name of the program to unblock, then click OK.  
If the name of the desired program is not in the list, click Browse to locate the program, and then click OK.
6. Verify the program runs successfully without being blocked.


If you do not resolve the issue by adding a program to the exception list, you can add ports manually. To do this, you must first identify the ports that are used by the program. A reliable way to determine port usage is to use the Netstat.exe tool.

To add a port exception, perform the following steps:

1. Use an Administrator account to log on.
2. In the Control Panel, click on Windows Firewall.
3. Click the Exceptions tab, then click Add Port to display the Add a Port dialog box.
4. Type a descriptive name for the port exception and the port number required, then select either the TCP or UDP protocol.
5. Click Change Scope.
6. View or set the scope for the port exception, and then click OK.
7. Click OK to close the Add a Port dialog box.
8. Verify that the port settings are correct for your program, test the program.

To allow incoming access from the *UCS Client* on TCP port 80 for an XP SP2 machine running as an intranet web server in a workgroup environment:

1. Use an Administrator account to log on.
2. In the Control Panel, click on the Windows Firewall.
3. Click the Exceptions tab, then click Add Port.
4. Type a descriptive name for the new exception and specify TCP port 80 (shown) to open the port for unsolicited inbound traffic:

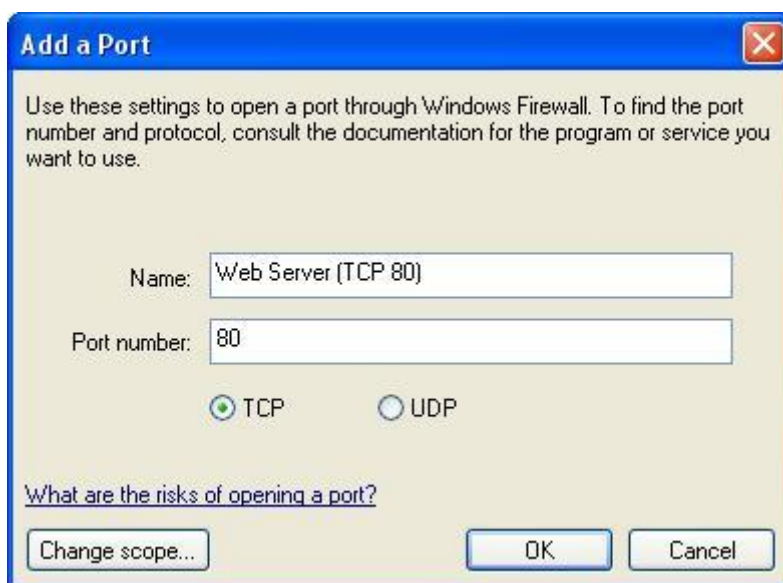

## 7.2 External Firewall Settings

Firewall policies are instructions your firewall uses to decide what to do with a connection request. When the firewall receives a connection request in the form of a packet, it analyzes the packet to extract the source address, destination address, and service (by port number). For the packet to be connected through the firewall, the source address, destination address, and service port number of the packet must match a firewall policy. The policy directs the firewall action on the packet.

If your network is protected from the Internet by a firewall and you want to establish connections between *iPECS UCS Server* and remote *iPECS UCS Client* via the Internet, you must ensure that the firewall is configured in order to allow the following *UCS* service port number:

- 80 (TCP) - HTTP Service
- 25060 (UDP) - SIP Signaling
- 25058,25059 (TCP) - Gateway Relay Session
- 25056,25057 (TCP) - Chatting Session

If you are not your network's administrator, notify the administrator that your network must allow the above ports for proper operation of *iPECS UCS Server*.

## 7.3 Different Network Interface Card for PBX connection

Sometimes the connection between UCS Server and PBX must be made through a different NIC (Network Interface Card) from that for the connection between UCS Server and UCS Clients. This situation may happen at the site that uses the network configuration isolated for voice and data




transmission.


For this kind of situation, UCS Server provides the feature of selecting a NIC for the connection to PBX.

To choose a NIC for the connection to PBX:

1. Right-click on IMR/Presence Process at UCS Server Manager.

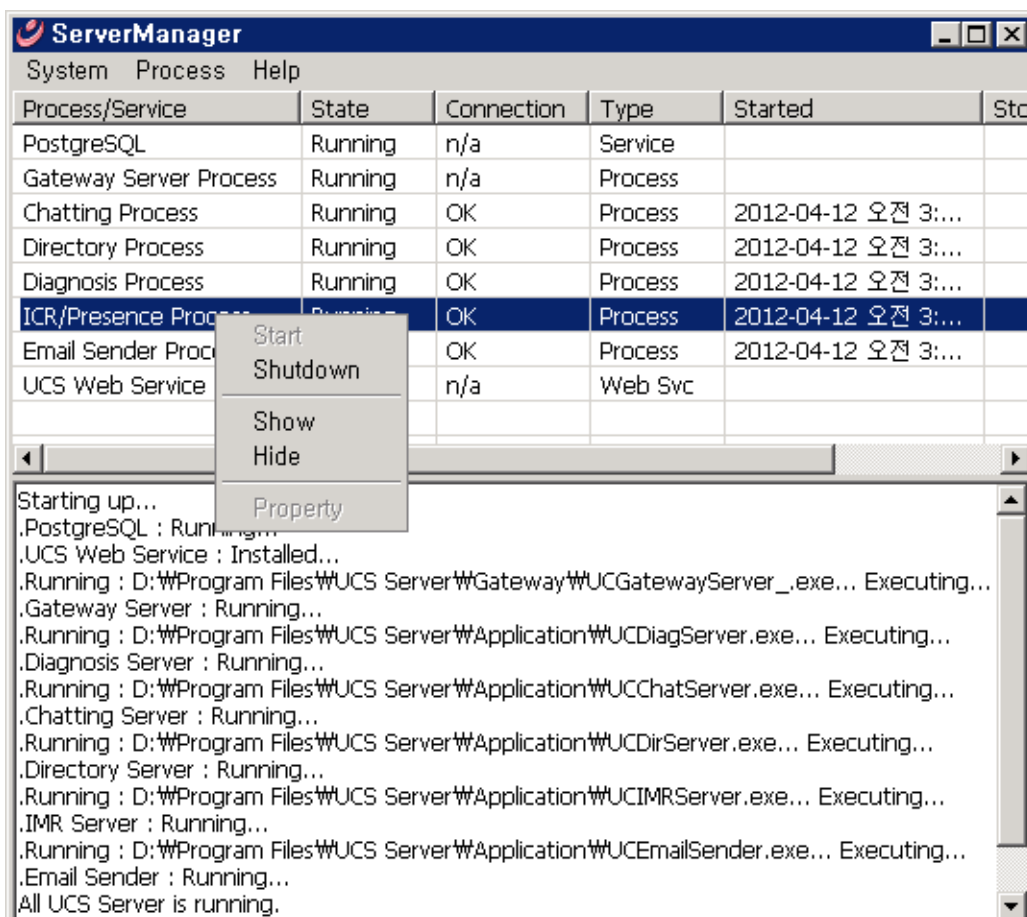

2. Select **Show** to display the UCS ICR Server window.
3. Select **Server Configuration** from the menu, **Server** to display Connection Configuration window.

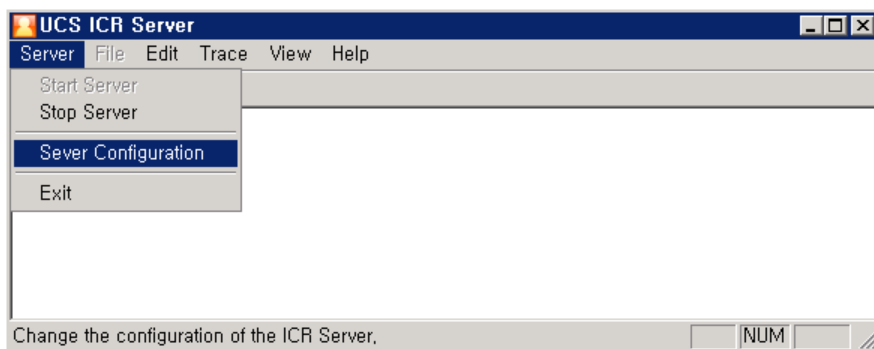

4. Check Use the selected network adapter and select the network adapter to be used for the connection to PBX.

**Connection Configuration**

Gateway Server Setting  
IP Address: 127.0.0.1

Reconnection  
 Auto Reconnect to PTC 30 seconds

Database Server Setting  
IP Address: 127.0.0.1  
Resources: 10

Interface to PBX  
 Use the selected network adapter  
150.150.131.137(Realtek RTL8168/8111 Family PCI-E)  
150.150.131.137(Realtek RTL8168/8111 Family PCI-E)

OK Cancel

5. Click OK, close UCS ICR Server, Shutdown ICR/Presence Process at UCS ServerManager, and restart it.
6. A few minutes later, you can check whether the connection to the PBX is active at UCS Web Admin > Status > PBX.

## Appendix A – Log Messages

Msg Code	Message	Default Category	Supplementary Information
1001	Server Process Started	Notice	PROCESS NAME
1002	Server process Stopped	Warning	PROCESS NAME
1003	Server Process No Answer	Warning	PROCESS NAME
1101	PBX System Connected	Notice	SITE NAME, IP ADDRESS, SYSTEM TYPE
1102	PBX System No Answer	Warning	SITE NAME, IP ADDRESS, SYSTEM TYPE
1103	Presence Service Started	Notice	SITE NAME, IP ADDRESS, SYSTEM TYPE
1201	ICR Routing Result	Notice	CALLER NUMBER, CALLED NUMBER, DESTINATION NUMBER
1202	ICR Routing Fail Report	Warning	CAUSE, CALLER NUMBER, CALLED NUMBER, DESTINATION NUMBER
1203	Invalid ICR Request	Warning	CALLER NUMBER, CALLED NUMBER, DATE_TIME
1301	UCS Client No Answer	Warning	USER, IP ADDRESS
1302	UCS Client Re-Login	Warning	USER, IP ADDRESS (BEFORE), IP ADDRESS (AFTER)
1303	UCS Client Login	Notice	USER, IP ADDRESS
1304	UCS Client Logout	Notice	USER, IP ADDRESS
1305	UCS Client Login Fail	Warning	USER ID, IP ADDRESS, CAUSE
1311	Inbound Call Log	Notice	DATE_TIME, USER ID, DESTINATION NUMBER
1312	Outbound Call Log	Notice	DATE_TIME, USER ID, DESTINATION NUMBER, CO LINE NUMBER
1314	IM Event Log	Notice	DATE_TIME, USER ID, PEER ID
1315	Sharing Event Log	Notice	DATE_TIME, USER ID, PEER ID
1316	File Sending Event Log	Notice	DATE_TIME, USER ID, PEER ID
1317	Web Push Log	Notice	DATE_TIME, USER ID, PEER ID
1318	Video Log	Notice	DATE_TIME, USER ID, PEER ID
1320	File Receive Event Log	Notice	DATE_TIME, USER ID, PEER ID, FILE NAME, FILE SIZE
1321	SMS Send Event Log	Notice	DATE_TIME, SENDER, RECEIVER
1322	SMS Receive Event Log	Notice	DATE_TIME, SENDER, RECEIVER
1323	Note Send Event Log	Notice	DATE_TIME, SENDER, RECEIVER
1324	Note Receive Event Log	Notice	DATE_TIME, SENDER, RECEIVER
1325	Missed Call Log	Notice	DATE_TIME, USER ID, DESTINATION NUMBER
1326	Admin Message Log	Notice	DATE_TIME, RECEIVER, SUBJECT
1327	Whiteboard Event Log	Notice	DATE_TIME, USER ID, PEER ID
1328	Desktop Sharing Event Log	Notice	DATE_TIME, USER ID, PEER ID
1329	Video Presentation Event Log	Notice	DATE_TIME, USER ID, PEER ID

<b>Msg Code</b>	<b>Message</b>	<b>Default Category</b>	<b>Supplementary Information</b>
1330	Remote Monitoring Event Log	Notice	DATE_TIME, USER ID, PEER ID
1401	Chat Room Created	Notice	TYPE, CREATOR, ROOM NAME, SUBJECT, ACCESS TYPE, MEMBER COUNT
1402	Chat Room Deleted	Notice	TYPE, OPERATOR, ROOM NAME
1403	Enter Chat Room	Notice	TYPE, MEMBER, ROOM NAME
1404	Exit Chat Room	Notice	TYPE, MEMBER, ROOM NAME
1501	Voice Network Code Mismatch	Warning	SITE NAME, IP ADDRESS, VN CODE (DB), VN CODE (PBX)
1601	DB Table not Exist	Warning	TABLE NAME
1602	DB View not Exist	Warning	VIEW NAME
1701	Call Connection Fail	Warning	USER, DESKTOP PHONE NUMBER, CAUSE
1702	Desktop Phone Number Mismatch	Warning	USER, DESKTOP PHONE NUMBER, CONNECTED NUMBER
1801	Schedule Folder Created	Notice	NAME, CREATED BY
1802	Schedule Folder Deleted	Notice	NAME, DELETED BY
1803	Schedule Folder Name Changed	Notice	OLD NAME, NEW NAME, CHANGED BY
1804	Schedule Item Created	Notice	FOLDER, SUBJECT, CREATED BY
1805	Schedule Item Deleted	Notice	FOLDER, SUBJECT, DELETED BY
1806	Schedule Item Contents Changed	Notice	FOLDER, SUBJECT, CHANGED BY

[www.ericssonlg.com](http://www.ericssonlg.com)

©2012 Ericsson-LG Co., Ltd. All Rights Reserved.

# iPECS



[www.ericssonlg.com](http://www.ericssonlg.com)

©2012 Ericsson-LG Co., Ltd. All Rights Reserved.