

FH01000 Hand-held OTDR



Description:

FH01000 Handheld OTDR is the latest smart OTDR of Grandway. It can measure the length of optical fiber about 70km. In short distance optical fiber testing, with the excellent 1m/4m deadzone performance, all kinds of continuous connectors, attenuation loss and other events can be clearly distinguished.

FH01000 is equipped with 1310nm and 1550nm dual wavelength OTDR, optical power meter, stable laser source, 10mw VFL, RJ45 line sequence measurement and other functions. At the same time, it has bluetooth wireless connection (optional) and supports pairing with mobile phones.

Features:

- 3.5 inch(75L x 50mmW) color LCD, portable design and easy to carry.
- Multi function integration, support 10mw VFL, stable laser source, optical power meter, RJ45 line sequence test and other functions.
- High precision, short deadzone OTDR can accurately test all kinds of continuous connectors and attenuation points in the line.
- 22/20dB dynamic support 70km optical fiber measurement.
- Optional bluetooth connection of mobile phone supports fast transmission of test files to mobile phone.
- Mobile phone remote control, control OTDR test and curve view analysis through the mobile phone.
- IP52 protection level


Specifications:

Items	Specifications
-------	----------------

Fiber type	SMF (ITU-T G. 652)
Wavelength	1310±20nm/1550±20nm
Dynamic range	22/20dB
Test range	500m, 1km, 2km, 5km, 10km, 20km, 40km, 80km
Pulse width	3ns/5ns/10ns/30ns/50ns/100ns/275ns/500ns/1us/2us/5us/10us/20us
Event deadzone ^①	≤1m
Attenuation deadzone ^①	≤4m
Refractive index	1.000~1.999
Sampling points	64000
Sampling accuracy	0.05m (1km)
Distance accuracy	±(1m+test distance×3×10 ⁻⁵ +sampling resolution) (excluding IOR uncertainty)
Loss accuracy	0.1dB
Linearity	0.1dB
Reflectance accuracy	±2dB
Event display	1) Fiber end 2) Reflection event 3) Splice loss
VFL	Working wavelength: 650±10nm Output: 10mW, CW/1Hz/2Hz
Stable OLS	Working wavelength: 1310±20nm/1550±20nm Output >-13dBm, CW/270Hz/1kHz/2kHz
OPM	Calibrated wavelength: 850/1300/1310/1490/1550/1625/1650nm Test range: -70~+10dBm
RJ45 line sequence test	TIA568-A and TIA568-B standard
Optical interface	OTDR: standard FC/UPC, optional SC/UPC, FC/APC, SC/APC VFL: 2.5mm universal port OLS: share the OTDR port OPM: 2.5mm universal port
Electrical interface	RJ45 port×2, RJ45 remote module USB Type-C
Wireless	Bluetooth (optional)
Data storage	Pluggable 8GB micro SD card
Battery	5000mAh lithium battery
Working humidity	0~85%(non condensing)
Working temperature	-10~50℃
Dimension	192.9×93.8×47mm
Weight	0.57kg

Notes:

- 1, Deadzone test conditions: event deadzone return loss > -45dB, attenuation deadzone return loss > -55dB.
- 2, The product shell color is optional purple/blue/orange.
3. FLM picture:

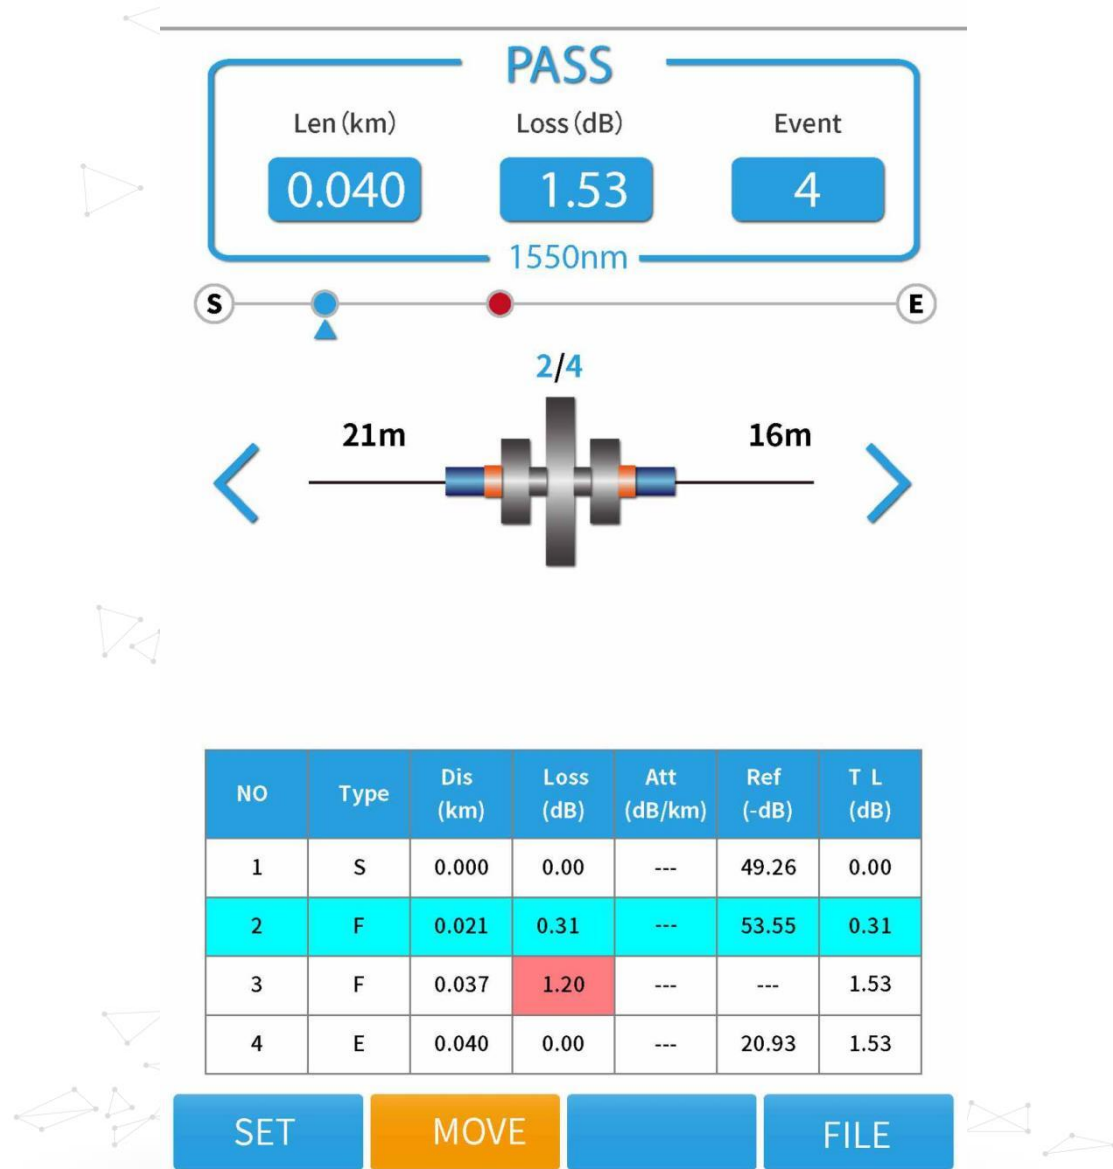

Let's go in the grandway!