



## Содержание прайс листа

| NO. | Наименование страницы                            |
|-----|--------------------------------------------------|
| 1   | <a href="#">1. UHF</a>                           |
| 2   | <a href="#">1.1 UHF аксессуары</a>               |
| 3   | <a href="#">2. Биометрические считыватели</a>    |
| 4   | <a href="#">4. Терминалы для УРВ</a>             |
| 5   | <a href="#">4.1. УРВ комплектующие</a>           |
| 6   | <a href="#">5. Терминалы</a>                     |
| 7   | <a href="#">5.1 Контроллеры</a>                  |
| 8   | <a href="#">5.2 Комплектующие СКД</a>            |
| 9   | <a href="#">6. Интроскопы</a>                    |
| 10  | <a href="#">6.1 Комплектующие РТУ</a>            |
| 11  | <a href="#">6.2 Металлодетекторы</a>             |
| 12  | <a href="#">6.3 Комплектующие</a>                |
| 13  | <a href="#">6.5 Оборудования ДТС</a>             |
| 14  | <a href="#">7. Шлагбаумы</a>                     |
| 15  | <a href="#">7.1 Комплектующие шлагбаумов</a>     |
| 16  | <a href="#">7.2 Парковочные замки</a>            |
| 17  | <a href="#">7.3 Аксессуары ПЗ</a>                |
| 18  | <a href="#">7.4 Аксессуары для парковки</a>      |
| 19  | <a href="#">7.5 LPR</a>                          |
| 20  | <a href="#">7.6 LPR аксессуары</a>               |
| 21  | <a href="#">8. Полноростовые турникеты</a>       |
| 22  | <a href="#">8.1 Турникеты триподы</a>            |
| 23  | <a href="#">8.2 Раздвижные турникеты</a>         |
| 24  | <a href="#">8.3 Распашные турникеты</a>          |
| 25  | <a href="#">8.4 Оптические турникеты</a>         |
| 26  | <a href="#">8.5 Аксессуары к турникетам</a>      |
| 27  | <a href="#">8.6 Водонепроницаемые турникеты</a>  |
| 28  | <a href="#">8.7 Турникеты серии Mars</a>         |
| 29  | <a href="#">9. Билетные кассы</a>                |
| 30  | <a href="#">9.1 Аксессуары к билетным кассам</a> |
| 31  | <a href="#">10. Распашные ворота</a>             |
| 32  | <a href="#">11. FaceKiosK</a>                    |
| 33  | <a href="#">11.1 Аксессуары для FaceKiosK</a>    |

Прайс-лист на UHF устройства (дальнего действия)



| Тип 1             | Тип 2      | Модель            | Фото                                                                                | Параметры                                                                                                                                                                                                                                                                                                                                                                                               | Цена розница |
|-------------------|------------|-------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| Standalone device | UHF reader | UHF 5 Pro series  |    | New long distance RFID UHF reader with LED<br>Reading distance:0-8m(For Hand-held testing)<br>Reading distance:0-5m(For noncontact vehicle management)<br>Communication:Wiegand26/34,USB ,RS485(opetional)<br>Size: 308*308*67<br>ZKTeco Logo<br>unencrypted reader<br>E: means frequency band(865MHz-868MHz)<br>F: means frequency band(902MHz-906MHz)                                                 | 157 248      |
| Standalone device | UHF reader | UHF 10 pro series |  | New long distance RFID UHF reader with LED<br>Reading distance:0-20m(For Hand-held testing)<br>Reading distance:0-5m(For noncontact vehicle management)<br>Communication:Wiegand26/34,USB ,RS485(opetional)<br>Size: 445*445*67<br>ZKTeco Logo<br>unencrypted reader<br>E: means frequency band(865MHz-868MHz)<br>F: means frequency band(902MHz-906MHz)                                                | 182 208      |
| Standalone device | UHF reader | UHF 6E Pro        |  | <b>*Ultra-long range RFID UHF reader</b><br>Reading distance:0-18m(Recommend distance:0-12m)<br>Stronger penetration ability for general metal explosion-proof film;<br>ZKTeco Logo ; Black ;<br>Unencrypted ;                                                                                                                                                                                          | 348 192      |
| Standalone device | UHF reader | UHF 6F Pro        |  | <b>Base on UHF 6E pro specifications, only frequecey different 920MHz ~ 928MHz</b>                                                                                                                                                                                                                                                                                                                      | 348 192      |
| Standalone device | UHF reader | U1000 Series      |  | <b>* Middle distance RFID UHF Standalone Teiminal</b><br>Reading distance:0-6m(For Hand-held testing)<br>Reading distance:0-3m(For noncontact accss management)<br>*TCP/IP,USB,Wiegand In/Out,Two Relay,Trigger,Door Sensor, Exit Button;<br>*Support ZKAccess3.5,ZKBioSecurity3.0<br>*Size: 250*250*70mm<br>ZKTeco Logo,Black color(Stadard)                                                           | 249 600      |
| Standalone device | UHF reader | U2000 Series      |  | <b>* Long distance RFID UHF Standalone Terminal</b><br>Reading distance:0-12m(For Hand-held testing)<br>Reading distance:0-6m<br>(For long distance fixed vehicle access management)<br>* TCP/IP,USB,Wiegand In/Out,Two Relay,Trigger,Door Sensor, Exit Button;<br>*Support ZKAccess3.5,ZKBioSecurity3.0<br>*Size: 445*445*70mm<br>ZKTeco Logo,Black color(Stadard)<br>Blank Logo,White color(Optional) | 287 040      |
| Standalone device | UHF reader | UHT100            |  | <b>*Industrial Handheld Smart Data Collection Terminal</b><br>Android 6.0, 2G RAM, 32G ROM, 5.0-inch LCD touch screen ;<br>AC Adapter:6000mAh chargeable lithium battery<br>Communication: Wi-Fi, Bluetooth4.0, USB ;<br>Frequency:F:902MHz-928MHz,E:865MHz-868MHz ;<br>Standard :<br>Frequency:902MHz-928MHz                                                                                           | 797 472      |
| Standalone device | UHF reader | UG100             |  | Interface RS-232(DB9),RJ45<br>Shell material;Metal door frame,ABS blister panel<br>Energy losing:45w<br>Working Temperature;-10 -+60<br>Dimension;1371*370*69mm<br>Weight 13kg/pcs                                                                                                                                                                                                                      | 2 494 752    |

Прайс-лист на аксессуары для UHF оборудования

| Тип                | Модель                         | Фото                                                                                | Параметры                                                                                                                                                                                                                                                                                          | Совместимое устройство | Цена розница |
|--------------------|--------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|--------------|
| Accessories of UHF | New UHF Parking Tag            |    | *UHF Tag<br>Can be sticked on the windshield of car<br>Better effect for advanced metal film of car<br>ZKTeco Logo<br>Size:100*40mm<br>Temperature: - 30 — +85<br>Application:<br>Long distancen fixed vehicle access management<br>(Reading distance for 0-6m for UHF 10 and                      | All UHF reader         | 499          |
| Accessories of UHF | New UHF Parking Tag<br>(丝印卡号 ) |    | *UHF Tag<br>Can be sticked on the windshield of car<br>Better effect for advanced metal film of car<br>ZKTeco Logo<br>Size:100*40mm<br>Temperature: - 30 — +85<br>Application:<br>Long distancen fixed vehicle access management<br>(Reading distance for 0-6m for UHF 10 and                      | All UHF reader         | 624          |
| Accessories of UHF | New UHF Waterproof Tag         |  | Can be sticked on the windshield of car<br>Better effect for advanced metal film of car<br>ZKTeco Logo<br>support waterproof and anti-tear<br>Size: 99*12mm<br>Temperature: -25 ~75<br>Application:<br>Long distancen fixed vehicle access management<br>(Reading distance for 0-6m for UHF 10 and | All UHF reader         | 749          |
| Accessories of UHF | UHF1-Tag9                      |  | *UHF Tag<br>Thin<br>Size: 85.5*54*0.84mm<br>Application:<br>1.Long distancen fixed vehicle access management<br>(Reading distance for 0-6m for UHF 10 series),<br>Note:with Parking Card Holder<br>Temperature: - 30 — +85                                                                         | All UHF reader         | 349          |
| Accessories of UHF | UHF1-Tag9<br>(丝印卡号 )           |  | *UHF Tag<br>Thin<br>Printed 8 digit decimal card number for wiegand 26 output<br>Size: 85.5*54*0.84mm<br>Application:<br>1.Long distancen fixed vehicle access management<br>(Reading distance for 0-6m for UHF 10 series),<br>Note:with Parking Card Holder<br>Temperature: - 30 — +85            | All UHF reader         | 874          |
| Accessories of UHF | DF01 Card                      |  | *UHF Dual Frequency Card<br>Frequency:125KHz&UHF frequency band<br>Printed 10 digit decimal card number for wiegand 34 output<br>Protocal:ID: ISO/EM4001 ; UHF:ISO/IEC 18000-6C<br>Size: 85.5*54*0.9mm<br>Application:                                                                             | All UHF reader         | 874          |
| Accessories of UHF | DF02 Card                      |  | *UHF Dual Frequency Card<br>Frequency:13.56MHz&UHF frequency band<br>Printed 10 digit decimal card number for wiegand 34 output<br>Protocal:<br>MF:ISO/IEC14443A ; UHF:ISO/IEC 18000-6C<br>Size: 85.5*54*0.9mm<br>Application:                                                                     | All UHF reader         | 661          |
| Accessories of UHF | 第三代读头主板MI6 10                  |  | mianbord for the third generation UHF reader<br>UHF 5 Pro &UHF 10 Pro<br>without Antenna module                                                                                                                                                                                                    | UHF 5 Pro<br>UHF10 Pro | 23 712       |


|                    |                     |                                                                                     |                                                                                                                                                                                  |                                |        |
|--------------------|---------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|--------|
| Accessories of UHF | UHF 6 Pro主板         |    | mainboard for UHF 6 Pro reader<br>without Antenna module                                                                                                                         | UHF 6 pro                      | 28 704 |
| Accessories of UHF | New UHF mainboard   |    | *Mainboard<br>For UHF1-5F/E,UHF1-10F/E,UHF2-5F/E,UHF2-10F/E                                                                                                                      | All UHF reader                 | 81 120 |
| Accessories of UHF | Fixed Bracket       |    | *Fixed Bracket<br>For UHF1-5F/E,UHF1-10F/E,UHF2-5F/E,UHF2-10F/E                                                                                                                  | All UHF reader                 | 8 349  |
| Accessories of UHF | UHF1-Tag3           |    | *UHF Tag<br>Anti-metal<br>Can be fixed on license plate<br>Size: 249*13.8*18mm<br>Application:<br>Long distancen fixed vehicle access management                                 | All UHF reader                 | 1 298  |
| Accessories of UHF | Parking Card Holder |    | UHF Card Holder<br>Material:PC<br>Application :<br>With UHF1-Tag1 for long distance fixed vehicle access management<br>MOQ:100pcs                                                | UHF1-Tag1                      | 861    |
| Accessories of UHF | UHF1-10F 前壳         |   | *Front Shell<br>For UHF1-10F                                                                                                                                                     | UHF 1-10                       | 11 981 |
| Accessories of UHF | UHF1-Tag7           |  | Chip:impinj Monza 4E<br>Interface Protocol : IOS/IEC 18000-6C EPC CLASS1 Gen2<br>Erase Endurance 100000 times (only for chip)<br>Substrate Material : PET<br>Dimension : 16*16mm | All UHF reader                 | 300    |
| Accessories of UHF | UA11                |  | UHF Antenna<br>Reading Distance:1.2-4m<br>No Waterproof<br>Frequency:840-940MHz<br>Joint Model:SMA-K<br>Gain:2dBi<br>Dimension:50*50*8.5mm                                       | UR4000 Series<br>UR8000 Series | 18 595 |
| Accessories of UHF | UA12                |  | UHF Antenna<br>Reading Distance:2.5-6m<br>No Waterproof<br>Frequency:840-940MHz<br>Joint Model:SMA-K<br>Gain:6dBi<br>Dimension:120*120*6.5mm                                     | UR4000 Series<br>UR8000 Series | 56 035 |
| Accessories of UHF | UA13                |  | *UHF Antena<br>Reading Distance:5-9m<br>Waterproof<br>Frequency:840-940MHz<br>Joint Model:SMA-K<br>Protection Grade:IP67<br>Gain:6dBi                                            | UR4000 Series<br>UR8000 Series | 52 291 |
| Accessories of UHF | UA14                |  | *UHF Antena<br>Reading Distance:6-18m<br>Waterproof<br>Frequency:840-940MHz<br>Joint Model:N-Female<br>Protection Grade:IP67<br>Gain:9dBi                                        | UR4000 Series<br>UR8000 Series | 77 251 |
| Accessories of UHF | UW13                |  | *UHF Connecting wire<br>Suitable for UA11,UA12,UA13<br>Adaptable Joint:SMA-K<br>Wire Length:3m<br>Copper wire                                                                    | UR4000 Series<br>UR8000 Series | 7 363  |
| Accessories of UHF | UW15                |  | *UHF Connecting wire<br>Suitable for UA11,UA12,UA13<br>Adaptable Joint:SMA-K<br>Wire Length:5m<br>Copper wire                                                                    | UR4000 Series<br>UR8000 Series | 7 850  |
| Accessories of UHF | UW23                |  | *UHF Connecting wire<br>Suitable for UA11,UA12,UA13<br>Adaptable Joint:N-Female<br>Wire Length:3m<br>Copper wire                                                                 | UR4000 Series<br>UR8000 Series | 7 363  |
| Accessories of UHF | UW25                |  | *UHF Connecting wire<br>Suitable for UA14<br>Adaptable Joint:N-Female<br>Wire Length:5m<br>Copper wire                                                                           | UR4000 Series<br>UR8000 Series | 7 850  |
| Accessories of UHF | UHF1-Tag2           |  | Frequency:800MHz-920MHz<br>Reading distance:<br>Up to 10 meters for UHF1-10E and UHF1-10F;<br>Memory Capacity: 800 bits<br>Chip UID: 64 bytes<br>Working Temperature: -20 ~ +75  | All UHF reader                 | 324    |



|                    |                           |                                                                                     |                                                                                                                                                                                                                                                           |                        |         |
|--------------------|---------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|---------|
| Accessories of UHF | UHF1-Tag2<br>(丝印卡号)       |    | Frequency:860MHz-920MHz<br>Reading distance:<br>Up to 10 meters for UHF1-10E and UHF1-10F;<br>Memory Capacity: 800 bits<br>Chip UID: 64 bytes<br>Working Temperature: 20 ~ +75 °C                                                                         | All UHF reader         | 449     |
| Accessories of UHF | UHF1-Tag4                 |    | Frequency:860MHz-960MHz<br>Reading distance:<br>Up to 10 meters for UHF1-10E and UHF1-10F;<br>Storage structure:EPC 800 bits, UID/TID:64 bits,User:512 bits<br>Kill password:32bits, Access                                                               | All UHF reader         | 474     |
| Accessories of UHF | UHF1-Tag4<br>(印卡号)        |    | Frequency:860MHz-960MHz<br>Reading distance:<br>Up to 10 meters for UHF1-10E and UHF1-10F;<br>Storage structure:EPC 800 bits, UID/TID:64 bits,User:512 bits<br>Kill password:32bits, Access                                                               | All UHF reader         | 599     |
| Accessories of UHF | UHF Waterproof Tag        |    | *UHF Tag<br>Waterproof<br>MOQ:1000pcs                                                                                                                                                                                                                     | All UHF reader         | 250     |
| Accessories of UHF | UHF Parking Tag           |    | *UHF Tag<br>Can be sticked on the windshield of car<br>Better effect for advanced metal film of car<br>Blank Logo<br>Size:100*26mm<br>Application:<br>Long distancen fixed vehicle access management<br>(Reading distance for 0-6m for UHF 10 and         | All UHF reader         | 499     |
| Accessories of UHF | UHF Parking Tag<br>(丝印卡号) |  | *UHF Tag<br>Can be sticked on the windshield of car<br>Better effect for advanced metal film of car<br>Blank Logo<br>Size:100*26mm<br>Application:<br>Long distancen fixed vehicle access management<br>(Reading distance for 0-6m for UHF 10 and         | All UHF reader         | 624     |
| Accessories of UHF | UHF1-Tag1                 |  | *UHF Tag<br>Thin<br>Size: 85*54*0.8mm<br>Application:<br>1.Long distancen fixed vehicle access management<br>(Reading distance for 0-6m for UHF 10 series),<br>Note:with Parking Card Holder                                                              | All UHF reader         | 349     |
| Accessories of UHF | UHF1-Tag1<br>(丝印卡号)       |  | *UHF Tag<br>Thin<br>Printed 8 digit decimal card number for wiegand 26 output<br>Size: 85*54*0.8mm<br>Application:<br>1.Long distancen fixed vehicle access management<br>(Reading distance for 0-6m for UHF 10 series),<br>Note:with Parking Card Holder | All UHF reader         | 487     |
| Accessories of UHF | UHF Parking Card          |  | Application: cars management<br>Weight:24.52g<br>Workign Temperture:-10 ~+6240 Tr0<br>Dimension : 89*57*3.5mm                                                                                                                                             | All UHF reader         | 3 494   |
| Accessories of UHF | UHF1-Tag6                 |  | 陶瓷手环·黑色<br>Frequency:<br>F:902-928MHz<br>E:865-868MHz<br>MOQ:1000pcs                                                                                                                                                                                      | All UHF reader         | 4 805   |
| Accessories of UHF | BT-Tag1                   |  | * Long Distance Bluetooth Card<br>Pasting for fixing;<br>Demension : 66.7*74*45mm<br>MOQ:20000pcs                                                                                                                                                         | BT-100                 | 2 721   |
| Accessories of UHF | UR20RW                    |  | *UHF card issuer<br>Comunication:USB;<br>*Unencrypted,Blank Logo<br>RW:means reading&writing EPC number(Card number)<br>E: means frequency band(865MHz-868MHz)<br>F: means frequency band(902MHz-926MH                                                    | All UHF Card           | 108 576 |
| Accessories of UHF | RF module                 |  | M610(UM024) 56mm*36.5mm<br>Radio frequency module for the third generation UHF reader<br>UHF 5 Pro &UHF 10 Pro                                                                                                                                            | UHF 5 Pro<br>UHF10 Pro | 61 152  |

Прайс-лист на биометрические считыватели

| Тип 1       | Тип 2                                | Модель        | Фото                                                                                 | Параметры                                                                                                                                                                                                                                                                                                                      | Цена розница   |
|-------------|--------------------------------------|---------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| PC Solution | Fingerprint Sensor                   | ZK8500R[MF]   |    | 1. Fingerprint Reader<br>2. ZK9500 fingerprint module(Standard)<br>3. MF card reader(Standard)<br>4. SLKID fingerprint module(Optional)                                                                                                                                                                                        | <b>49 920</b>  |
| PC Solution | Fingerprint Sensor                   | ZK8500R[ID]   |    | 1. Fingerprint Reader<br>2. ZK9500 fingerprint module(Standard)<br>3. ID card reader(Optional)<br>4. SLKID fingerprint module(Optional)                                                                                                                                                                                        | <b>43 680</b>  |
| PC Solution | Fingerprint Sensor                   | SLK20M-Casing |   | Desktop USB Enrollment device, based on SLK20M embedded module, fingerprint acquisition, fingerprint registration, fingerprint comparison, support Win10/8/7, support USB only. Firmware version: V9.00.                                                                                                                       | <b>49 920</b>  |
| PC Solution | Fingerprint Sensor                   | SLK20R        |                                                                                      | 1.Sensor type:optical<br>2.Desktop USB Enrollment device ;<br>3.Support USB only ;<br>4.PIV, STQC, CE, FCC, ROHS ;<br>5.ZKFinger10.0 algorithm;                                                                                                                                                                                | <b>49 920</b>  |
| PC Solution | Fingerprint Sensor (Embedded module) | SLK20M        |  | 1.Sensor type:optical;<br>2.Spport offline extraction and comparison of fingerprint templates on the module;<br>3.Spport USB 2.0 or UART ( 115200bps/TTL 3.3V ) ;<br>4.PIV, STQC, CE, FCC, ROHS ;<br>5.ZKFinger10.0 algorithm ;<br>6.Fingerprint capacity: 2000                                                                | <b>41 184</b>  |
|             |                                      | SLK20S        |                                                                                      | 1.Sensor type:optical ;<br>2.Spport offline extraction and comparison of fingerprint templates on the module;<br>3.Spport USB 2.0 or UART ( 115200bps/TTL 3.3V ) ;<br>4.PIV, STQC, CE, FCC, ROHS ;<br>5.ZKFinger15.0 algorithm, support ISO template ;<br>6.Fingerprint capacity:8000-10000(remarkable capacity when ordering) | <b>43 680</b>  |
| PC Solution | Fingerprint Sensor (Embedded module) | SLK21M        |                                                                                      | 1.Sensor type:optical ;<br>2.Spport offline extraction and comparison of fingerprint templates on the module;<br>3.Spport USB 2.0 or UART ( 115200bps/TTL 3.3V ) ;<br>4.PIV, STQC, CE, FCC, ROHS ;<br>5.ZKFinger10.0 algorithm ;<br>6.Fingerprint capacity:8000-10000(remarkable capacity when ordering)                       | <b>43 680</b>  |
| PC Solution | Fingerprint Sensor (Embedded module) | SLK20M-DK     |                                                                                      | Embedded optical fingerpringt scanner module for integration, support USB, TTLcommunication, SLK20M+ custom wire                                                                                                                                                                                                               | <b>123 552</b> |
|             |                                      |               |                                                                                      |                                                                                                                                                                                                                                                                                                                                |                |

|             |                                      |        |                                                                                       |                                                                                                                                                                                                                                                                                                                                                 |               |
|-------------|--------------------------------------|--------|---------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| PC Solution | Fingerprint Sensor                   | ZK6500 |    | 1.Desktop USB Enrollment device,<br>2.support USB only<br>3. FCC, CE, RoHS                                                                                                                                                                                                                                                                      | <b>24 960</b> |
| PC Solution | Fingerprint Sensor                   | ZK9500 |    | 1.Desktop USB Enrollment device,<br>2.support USB only<br>3.FCC, CE, RoHS, KC                                                                                                                                                                                                                                                                   | <b>24 960</b> |
| PC Solution | Finger Vein Sensor                   | FPV10R |    | 1.USB interface<br>2.500DPI /300DPI image resolution<br>3.Effective collecting area: 13.24*15.7mm<br>4.Compatible with Windows/Linux/Android<br>5.LED indicator                                                                                                                                                                                 | <b>93 600</b> |
| PC Solution | FP+Finger-vein module                | FPV10M |     | 1.USB interface<br>2.500DPI /300DPI image resolution<br>3.Effective collecting area: 13.24*15.7mm<br>4.Compatible with Windows/Linux/Android<br>5.LED indicator                                                                                                                                                                                 | <b>74 880</b> |
| PC Solution | QR code module                       | QR10M  |     | 1.Dimensions of the Scanning Area 15.24 * 20.32 (mm)<br>2.USB interface                                                                                                                                                                                                                                                                         | <b>22 464</b> |
| PC Solution | QR code reader                       | QR10L  |   | 1.Dimensions of the Scanning Area 15.24 * 20.32 (mm)<br>2.USB interface                                                                                                                                                                                                                                                                         | <b>24 960</b> |
| PC Solution | QR code reader                       | QR10X  |  | 1.Dimensions of the Scanning Area 15.24 * 20.32 (mm)<br>2.USB interface                                                                                                                                                                                                                                                                         | <b>27 456</b> |
| PC Solution | Fingerprint Sensor (Embedded module) | Bio30S |   | 1.Sensor type: electro-silicon;<br>2.Capture dimensions: 12.8*18mm( W * H ) ;<br>3.Spport offline extraction and comparison of fingerprint templates on the module;<br>4.Spport USB 2.0 or UART ( 115200bps/TTL 3.3V ) ;<br>5.anti-spoof ability, fingerprint liveness detection ;<br>6.ZKFinger10.0 algorithm ;<br>7.Fingerprint capacity:2000 | <b>53 664</b> |
| PC Solution | Fingerprint Sensor (Embedded module) | Bio31S |   | 1.Sensor type: electro-silicon;<br>2.Capture dimensions: 10.4*14mm( W * H ) ;<br>3.Spport offline extraction and comparison of fingerprint templates on the module;<br>4.Spport USB 2.0 or UART ( 115200bps/TTL 3.3V ) ;<br>5.anti-spoof ability, fingerprint liveness detection ;<br>6.ZKFinger10.0 algorithm ;<br>7.Fingerprint capacity:2000 | <b>37 440</b> |

|             |                                                       |                    |                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                  |
|-------------|-------------------------------------------------------|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| PC Solution | Fingerprint Sensor<br>Sensor type:<br>electro-silicon | Bio30R             | <br> | 1.Standard high-precision fingerprint recognition technology and optimized image processing.<br>2.Supports low false accept rate, high recognition rate, and rotated fingerprint.<br>3.Adopts international top semiconductor sensors, precise imaging, and fast acquisition speed.<br>4.Good imaging quality of dry / damp / rough finger skin suitable for a wide range of people.<br>5.Drive free fingerprint scanner, not required to install a driver; plug and play.<br>6.Supports Windows, Android, Linux, and other Operating System development. | <b>62 400</b>    |
| PC Solution | Multi-functional document reader                      | RS100              |                                                                                                                                                                          | 1.based on OCR technology<br>2.designed for extracting data from ICAO standard travel documents<br>3.provides ideal solutions for identifying Passports, Visa, ID cards, Driver License and other travel documents                                                                                                                                                                                                                                                                                                                                        | <b>711 360</b>   |
| PC Solution | Fingerprint Sensor                                    | ZK-AFIS 400        |                                                                                      | F certified 10-print livescan in full compliance with the “10-print capture scanner & software User group requirements” suitable for all applications in need of 4-slaps and rolled acquisition. A user interface based on 12 LEDs facilitates the acquisition procedure by indicating the fingerprint(s) to be acquired and providing quality feedback.                                                                                                                                                                                                  | <b>723 840</b>   |
| Software    | SDK                                                   | ZKfingerPro SDK    | Apply to:<br>SLK20R<br>SLK20R-N<br>ZK9500<br>ZK8500R<br>ZK6500                                                                                                           | 1. Comparison Method: 1: 1 or 1: N<br>2.Platform: Windows XP or a later version<br>3. Applicable development languages: C++, C#, VB, Delphi<br>4. Fingerprint Algorithm: ZKFinger V10.0<br>5. Number of Fingerprints :1:50,000<br>Based on ZKfingerSDK, an interface for inputting images from outside and extracting fingerprint templates is added.Support basic functions of fingerprints (registration, comparison, etc.)                                                                                                                             | <b>1 622 400</b> |
| Software    | SDK                                                   | ZKFingerModule SDK | Apply to:<br>SLK20M<br>SLK20S<br>Bio30S<br>Bio31S                                                                                                                        | 1. Comparison Method: 1: 1 or 1: N<br>2. Platform: Windows, Android,Linux<br>3. SDK Demo Language: C / C# / C++<br>4. Fingerprint Algorithm: ZKFinger V10.0<br>5. Number of Fingerprints :2000 (SLK20M)<br>8000 (SLK20S)                                                                                                                                                                                                                                                                                                                                  | <b>Бесплатно</b> |



Прайс-лист на терминалы для учета рабочего времени

| Тип 1                                      | Тип 2                      | Модель        | Фото                                                                                 | Параметры                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Цена розница |
|--------------------------------------------|----------------------------|---------------|--------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| Cloud T&A Terminal                         | 2.8" Non-touch LCD Display | D3            |     | Display: <b>Φ 40mm circular display area</b><br>Face Capacity: 500 (Optional 3,000)<br>Fingerprint Capacity: 1,000 (Optional 3,000)<br>User/Card Capacity: 1,000 (Optional 3,000)<br>Transaction Capacity: 150, 000<br>Hardware: 1.0GHZ Dual Core A7 CPU, 256MB RAM/512MB ROM, 1MP Binocular Camera<br>Communication: TCP/IP, <b>2.4GHz Wi-Fi (IEEE 802.11b/g/n), Bluetooth 4.2</b><br>Standard Functions: ADMS, DST, T9 Input, Camera, 14-digit User ID, Multiple Verification Methods<br>Access Control Interface: 3rd Party Electric Lock, Door Sensor, Exit Button<br>Software: <b>ZKBio Zlink (CloudATT)</b><br>Power Supply: DC 12V 1.5A<br>Operating Temperature: 0°C to 45°C<br>Operating Humidity: 20% to 80%<br>Dimensions (mm): Φ124.92 * 27.1 (Diameter*Width) | 74 880       |
| Palm&Fingerprint&Face T&A and A&C Terminal | 4.3" Touch Display         | PFace202      |   | <b>Palm Capacity: 600</b><br><b>Fingerprint Capacity: 2,000</b><br><b>Face Capacity: 1200(1:N) / 3000(1:1)</b><br><b>ID Card Capacity: 10,000 (Optional)</b><br><b>Record Capacity: 100,000</b><br>Communication: TCP/IP, USB Host, Wi-Fi(Optional)<br>Standard Functions: Automatic Status Switch, T9 input, 9 Digit User ID, Photo ID, Work Code, DST, Self Service Query, Schedule-bell, Multilpe Verify Mode<br>Access Control Interface for Third Party Electric Lock, Door Sensor and Eixt Button, Alarm,12V Out/In, Wiegand Out.<br>Optional: ID/MF, Backup Battery,3G,RS485 Fingerprint Reader, RS232 Printer<br>AC Adapter: 12V 3A                                                                                                                                | 237 120      |
| Multibio T&A and A&C Deviece               | 4.3" Color Display         | SFace900      |   | <b>Face capacity: 3000</b><br><b>Fingerprint Capacity: 4000</b><br><b>ID Card Capacity: 10,000 (Optional)</b><br>Communication: TCP/IP, USB-Host, Wiegand Out<br><b>Standard functions:</b> Automatic Status Switch, T9 input, 9 Digit User ID, Photo ID, Work Code, DST, Self Service Query, Schedule-bell, Multilpe Verify Mode, Access Control interface for 3rd party electric lock, Door Sensor and Exit Button, Alarm.<br><b>Optional functions:</b> ID Card, MF Card, ADMS, Wi-Fi, Backup Battery, 4G                                                                                                                                                                                                                                                               | 249 600      |
| Multibio T&A and A&C Deviece               | 4.3" Color Display         | uFace202 Plus |  | <b>Face capacity: 3000</b><br><b>Fingerprint Capacity: 4000</b><br><b>Palm Capacity:3000</b><br><b>Card Capacity: 10,000 (Optional)</b><br>Communication: TCP/IP, USB-Host, Wiegand Out, WiFi (Optional), <b>4G (Optional)</b><br><b>Standard functions:</b> Web-server, Work Code, SMS, DST, Record Query, Automatic State Switch, Photo ID, ADMS, Scheduled Bell, T9 Input, 9-digit User ID, Multi-Veri_x001F_cation Methods<br>Access Control Interface for 3rd-Party Electric Lock, Door Sensor, Exit Button, Alarm<br>Optional functions: ID/MF/HID Card, Wi-Fi,External Bell/Printer, Backup Battery<br>Algorithms: ZKFace V12.0 & ZKFinger V10.0 & ZKPalm V12.0                                                                                                     | 237 120      |

|                              |                    |               |                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |         |
|------------------------------|--------------------|---------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Multibio T&A and A&C Deviece | 4.3" Color Display | uFace302 Plus |     | Face capacity: 3000<br>Fingerprint Capacity: 4000<br>Palm Capacity:3000<br>Card Capacity: 10,000 (Optional)<br>Communication: TCP/IP, USB-Host, Wiegand Out,WiFi (Optional), <b>4G (Optional)</b><br>Standard functions: Web-server, Work Code, SMS, DST, Record Query, Automatic State Switch, Photo ID, ADMS, Scheduled Bell, T9 Input, 9-digit User ID, Multi-Veri_x001F_cation Methods<br>Access Control Interface for 3rd-Party Electric Lock, Door Sensor, Exit Button, Alarm<br>Optional functions: ID/MF/HID Card, Wi-Fi,/External Bell/Printer, Backup Battery<br>Algorithms: ZKFace V12.0 & ZKFinger V10.0 & ZKPalm V12.0               | 237 120 |
| Multibio T&A and A&C Deviece | 4.3" Color Display | uFace401 Plus |    | Face capacity: 3000<br>Palm Capacity:3000<br>Card Capacity: 10,000 (Optional)<br>Communication: TCP/IP, USB-Host, Wiegand Out, WiFi (Optional), <b>4G (Optional)</b><br>Standard functions: ID Card, Web-server, Work Code, SMS, DST, Record Query, Automatic State Switch, Photo ID, ADMS, Scheduled Bell, T9 Input, 9-digit User ID, Multi-Veri_x001F_cation Methods<br>Access Control Interface for 3rd-Party Electric Lock, Door Sensor, Exit Button, Alarm<br>Optional functions: MF/HID Card, Wi-Fi, External Bell/Printer, Backup Battery<br>Algorithms: ZKFace V12.0 & ZKPalm V12.0                                                       | 237 120 |
| Multibio T&A and A&C Deviece | 4.3" Color Display | uFace402 Plus |  | Face capacity: 3000<br>Fingerprint Capacity: 4000<br>Palm Capacity:3000<br>Card Capacity: 10,000 (Optional)<br>Communication: TCP/IP, USB-Host, Wiegand Out, WiFi (Optional), <b>4G (Optional)</b><br>Standard functions: Web-server, Work Code, SMS, DST, Record Query, Automatic State Switch, Photo ID, ADMS, Scheduled Bell, T9 Input, 9-digit User ID, Multi-Veri_x001F_cation Methods<br>Access Control Interface for 3rd-Party Electric Lock, Door Sensor, Exit Button, Alarm<br>Optional functions: ID/MF/HID Card, Wi-Fi, External Bell/Printer, Backup Battery<br>Algorithms: ZKFace V12.0 & ZKFinger V10.0 & ZKPalm V12.0              | 237 120 |
| Multibio T&A and A&C Deviece | 4.3" Color Display | uFace602 Plus |  | Face capacity: 3000<br>Fingerprint Capacity: 4000<br>Palm Capacity:3000<br>Card Capacity: 10,000 (Optional)<br>Communication: TCP/IP, USB-Host, Wiegand Out, WiFi (Optional), <b>4G (Optional)</b><br>Standard functions: Web-server, Work Code, SMS, DST, Record Query, Automatic State Switch, Photo ID, ADMS, Scheduled Bell, T9 Input, 9-digit User ID, Multi-Veri_x001F_cation Methods<br>Access Control Interface for 3rd-Party Electric Lock, Door Sensor, Exit Button, Alarm<br>Optional functions: ID/MF/HID Card, Wi-Fi, External Bell/Printer, Backup Battery<br>Algorithms: ZKFace V12.0 & ZKFinger V10.0 & ZKPalm V12.0              | 237 120 |
| Multibio T&A and A&C Deviece | 4.3" Color Display | uFace800 Plus |  | Face capacity: <b>3000</b><br>Fingerprint Capacity: <b>4000</b><br><b>Palm Capacity:3000</b><br>Card Capacity: 10,000 (Optional)<br>Communication: TCP/IP, USB-Host, Wiegand Out, WiFi (Optional), 4G (Optional)<br>Standard functions: Web-server, Work Code, SMS, DST, Record Query, Automatic State Switch, Photo ID, ADMS, Scheduled Bell, T9 Input, 9-digit User ID, Multi-Veri_x001F_cation Methods<br>Access Control Interface for 3rd-Party Electric Lock, Door Sensor, Exit Button, Alarm<br>Optional functions: ID/MF/HID Card,Wi-Fi, External Bell/Printer, Backup Battery<br>Algorithms: ZKFace V12.0 & ZKFinger V10.0 & ZKPalm V12.0 | 237 120 |



|                              |                    |               |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |         |
|------------------------------|--------------------|---------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Multibio T&A and A&C Deviece | 4.3" Color Display | uFace202      |    | <b>Face capacity:</b> 3000<br><b>Fingerprint capacity:</b> 4000<br><b>ID Card Capacity:</b> 10,000 (Optional)<br><b>Communication:</b> TCP/IP, USB-Host, Wiegand Out<br><b>Standard functions:</b> Automatic Status Switch, T9 input, 9 Digit User ID, Photo ID, Work Code, DST, Self Service Query, Schedule-bell, Multilpe Verify Mode<br>Access Control Interface for Third Party Electric Lock, Door Sensor and Eixt Button, Alarm.<br><b>Optional functions:</b> IDcard, MFCard, ADMS, 4G, Wi-Fi, Backup Battery                                                                                                     | 237 120 |
| Multibio T&A and A&C Deviece | 4.3" Color Display | uFace302      |    | <b>Face capacity:</b> 3000<br><b>Fingerprint capacity:</b> 4000<br><b>ID Card Capacity:</b> 10,000 (Optional)<br><b>Communication:</b> TCP/IP, USB-Host, Wiegand Out<br><b>Standard functions:</b> Automatic Status Switch, T9 input, 9 Digit User ID, Photo ID, Work Code, DST, Self Service Query, Schedule-bell, Multilpe Verify Mode<br>Access Control Interface for Third Party Electric Lock, Door Sensor and Eixt Button, Alarm<br><b>Optional functions:</b> IDcard, MFCard, ADMS, 4G, Wi-Fi, Backup Battery                                                                                                      | 237 120 |
| Multibio T&A and A&C Deviece | 4.3" Color Display | uFace402      |    | <b>Face capacity:</b> 3000<br><b>Fingerprint capacity:</b> 4000<br><b>ID Card Capacity:</b> 10,000 (Optional)<br><b>Communication:</b> TCP/IP, USB-Host, Wiegand Out<br><b>Standard functions:</b> Automatic Status Switch, T9 input, 9 Digit User ID, Photo ID, Work Code, DST, Self Service Query, Schedule-bell, Multilpe Verify Mode<br>Access Control Interface for Third Party Electric Lock, Door Sensor and Eixt Button, Alarm<br>Optional functions: IDcard, MF Card, ADMS, 4G, Wi-Fi, Backup Battery                                                                                                            | 237 120 |
| Multibio T&A and A&C Deviece | 4.3" Color Display | uFace602      |  | <b>Face capacity:</b> 3000<br><b>Fingerprint capacity:</b> 4000<br><b>ID Card Capacity:</b> 10,000 (Optional)<br><b>Communication:</b> TCP/IP, USB-Host, Wiegand Out<br><b>Standard functions:</b> Automatic Status Switch, T9 input, 9 Digit User ID, Photo ID, Work Code, DST, Self Service Query, Schedule-bell, Multilpe Verify Mode<br>Access Control Interface for Third Party Electric Lock, Door Sensor and Eixt Button, Alarm<br><b>Optional functions:</b> IDcard, MF Card, ADMS, 4G, Wi-Fi, Backup Battery                                                                                                     | 237 120 |
| Multibio T&A and A&C Deviece | 4.3" Color Display | uFace800      |  | <b>Face capacity:</b> 3000<br><b>Fingerprint capacity:</b> 4000<br><b>ID Card Capacity:</b> 10,000 (Optional)<br><b>Communication:</b> TCP/IP, USB-Host, Wiegand Out<br><b>Standard functions:</b> Automatic Status Switch, T9 input, 9 Digit User ID, Photo ID, Work Code, DST, Self Service Query, Schedule-bell, Multilpe Verify Mode<br>Access Control Interface for Third Party Electric Lock, Door Sensor and Eixt Button, Alarm<br><b>Optional functions:</b> IDcard, MFCard, ADMS, 3G/4G, Wi-Fi, Backup Battery                                                                                                   | 237 120 |
| Multibio T&A and A&C Deviece | 2.8" Color Display | MB2000        |  | <b>Fingerprint Capacity:</b> 3000<br><b>Face Capacity:</b> 2000<br><b>ID Card Capacity:</b> 3000 (Optional)<br><b>Record Capacity:</b> 100,000<br><b>Fingerprint Sensor:</b> BioID<br><b>Communication:</b> RS232/485, TCP/IP, USB -Host<br><b>Standard Functions:</b> Work Code, SMS, DST, Scheduled-bell, Self-Service Query, Automatic Status Switch, Photo ID, T9 Input, Camera, 9 digit user ID, Built-in Battery, Multiple Verify Mode.<br>Access Control Interface for Lock, Door Sensor, Exit Button, Alarm<br><b>Wiegand Signal:</b> Output<br><b>Optional:</b> ID/Mifare, ADMS, External Bell (Without Alarm) . | 112 320 |
| Multibio T&A and A&C Deviece | 2.8" Color Display | MB1000        |  | <b>Fingerprint Capacity:</b> 3000<br><b>Face Capacity:</b> 2000<br><b>ID Card Capacity:</b> 3000 (Optional)<br><b>Record Capacity:</b> 100,000<br><b>Fingerprint Sensor:</b> BioID<br><b>Communication:</b> TCP/IP, USB-Host, Wi-Fi(Optional)<br><b>Standard Functions:</b> Work Code, SMS, DST, Scheduled-bell, Self-Service Query, Automatic Status Switch, Photo ID, T9 Input, Camera, 9 digit user ID, Built-in Battery, Multiple Verifv Mode.                                                                                                                                                                        | 112 320 |
| Multibio T&A and A&C Deviece | 2.8" Color Display | SilkBio-101TC |  | <b>Fingerprint Capacity:</b> 3000<br><b>Face Capacity:</b> 2000<br><b>ID Card Capacity:</b> 3000 (Optional)<br><b>Record Capacity:</b> 100,000<br><b>Fingerprint Sensor:</b> SilkID<br><b>Communication:</b> TCP/IP, USB-Host, Wi-Fi(Optional)<br><b>Standard Functions:</b> Work Code, SMS, DST, Scheduled-bell, Self-Service Query, Automatic Status Switch, Photo ID, T9 Input, Camera, 9 digit user ID, Built-in Battery, Multiple Verifv Mode.                                                                                                                                                                       | 159 744 |

|                                |                    |               |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                |
|--------------------------------|--------------------|---------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Multibio T&A and A&C Devicee   | 2.8" Color Display | SilkBio-100TC |    | <b>Fingerprint Capacity:</b> 3000<br><b>Face Capacity:</b> 2000<br><b>ID Card Capacity:</b> 3000 (Optional)<br><b>Record Capacity:</b> 100,000<br><b>Fingerprint Sensor:</b> SilkID<br><b>Communication:</b> RS232/485, TCP/IP, USB -Host<br><b>Standard Functions:</b> Work Code, SMS, DST, Scheduled-bell, Self-Service Query, Automatic Status Switch , Photo ID, T9 Input, Camera, 9 digit user ID, Built-in Battery, Multiple Verify Mode, External Bell.<br><b>Access Control Interface for Lock, Door Sensor, Exit</b>               | <b>159 744</b> |
| Fingerprint T&A and A&C Device | 2.8" Color Display | iclock1000-G  |    | User: 3000(6000 Optional)<br>Fingerprint Capacity: 3000(6000 Optional)<br>ID Card Capacity: 3000 (6000 Optional)<br>Record Capacity: 200,000<br>Communication: TCP/IP, USB-host<br>Standard Functions: SMS, DST, Scheduled-bell, Self-sevice Qquery, Automatic Status Switch, T9 input, Multi-verification, RS232 Printer(Optional Cable), 3rd party electric lock, Exit Button, Alarm,ADMS,ID Card, Backup Battery.<br>Optional: Mifare Cards, Work Code, SSR(User Capacity)                                                               | <b>87 360</b>  |
| Fingerprint T&A and A&C Device | 2.8" Color Display | iclock4000-G  |   | User: 3000(60,00 Optional)<br>Fingerprint Capacity: 3000(6000 Optional)<br>ID Card Capacity: 3000 (6000 Optional)<br>Record Capacity: 200,000<br>Communication: TCP/IP, USB-host,GPRS<br>Standard Functions: SMS, DST, Scheduled-bell, Self-sevice Qquery, Automatic Status Switch, T9 input, Multi-verification, RS232 Printer(Optional Cable), 3rd party electric lock, Exit Button, Alarm,ADMS,ID Card, Backup Battery.                                                                                                                  | <b>87 360</b>  |
| Fingerprint T&A and A&C Device | 2.8" Color Display | iclock9000-G  |  | User: 3000(60,00 Optional)<br>Fingerprint Capacity: 3000(6000 Optional)<br>ID Card Capacity: 3000 (6000 Optional)<br>Record Capacity: 200,000<br>Communication: TCP/IP, USB-host,GPRS<br>Standard Functions: SMS, DST, Scheduled-bell, Self-sevice Qquery, Automatic Status Switch, T9 input, Multi-verification, RS232 Printer(Optional Cable), 3rd party electric lock, Exit Button, Alarm,ADMS,ID Card, Backup Battery.<br>Optional: Mifare Cards, Work Code, SSR(User Capacity)<br>(Optional Wi-Fi: 18720 тг ; 3G: 49920 тг,4G:6240 тг) | <b>87 360</b>  |
| Face T&A Device                | 2.8" Color Display | MB160         |  | <b>Face Capacity: 1500</b><br><b>Fingerprint Capacity: 2000</b><br><b>ID Card Capacity: 2000 (Optional)</b><br><b>Record Capacity: 100,000</b><br><b>Communication: TCP/IP, USB-host</b><br><b>Standard Functions: SMS, DST, Scheduled-bell, Self-sevice Qquery, Automatic Status Switch, T9 input, Photo ID, Camera, Multi-verification, RS232 Printer, 3rd party electric lock, Exit Button, Alarm.</b><br><b>Optional: ID/Mifare Cards, Work Code, ADMS</b><br><b>(Optional Wi-Fi: 18720 тг ; 3G/4G : 49920 тг; Battery : 12480 тг)</b>  | <b>93 600</b>  |
| Face T&A Device                | 2.8" Color Display | MB360         |  | <b>Face Capacity: 1500</b><br><b>Fingerprint Capacity: 2000</b><br><b>ID Card Capacity: 2000 (Optional)</b><br><b>Record Capacity: 100,000</b><br><b>Communication: TCP/IP, USB-host</b><br><b>Standard Functions: SMS, DST, Scheduled-bell, Self-sevice Qquery, Automatic Status Switch, T9 input, Photo ID, Camera, Multi-verification, RS232 Printer, 3rd party electric lock, Exit Button, Alarm.</b><br><b>Optional: ID/Mifare Cards, Work Code, ADMS</b>                                                                              | <b>93 600</b>  |
| Face T&A Device                | 2.8" Color Display | MB460         |  | <b>Face Capacity: 1500</b><br><b>Fingerprint Capacity: 2000</b><br><b>ID Card Capacity: 2000 (Optional)</b><br><b>Record Capacity: 100,000</b><br><b>Communication: TCP/IP, USB-host</b><br><b>Standard Functions: SMS, DST, Scheduled-bell, Self-sevice Qquery, Automatic Status Switch, T9 input, Photo ID, Camera, Multi-verification, RS232 Printer, 3rd party electric lock, Exit Button, Alarm.</b><br><b>Optional: ID/Mifare Cards, Work Code, ADMS</b>                                                                              | <b>93 600</b>  |
| Face T&A Device                | 2.8" Color Display | MB10          |  | <b>Face Capacity: 200</b><br><b>Fingerprint Capacity: 500</b><br><b>ID Card Capacity: 1000 (Optional)</b><br><b>Record Capacity: 50,000</b><br><b>Communication: TCP/IP, USB-host</b><br><b>Standard Functions:</b> Automatic Status Switch, Self-Service Query, DST, T9 Input, 9 Digit User ID, Scheduled Bell, Photo ID, Lock, sensor, Exit button.<br><b>Optional: ID/Mifare Cards</b>                                                                                                                                                   | <b>68 640</b>  |



|                         |                      |         |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                |
|-------------------------|----------------------|---------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Face T&A Device         | 2.8" Color Display   | MB20    |    | <b>Face Capacity:</b> 200<br><b>Fingerprint Capacity:</b> 500<br><b>ID Card Capacity:</b> 1000 (Optional)<br><b>Record Capacity:</b> 50,000<br><b>Communication:</b> TCP/IP, USB-host<br><b>Standard Functions:</b> Automatic Status Switch, Self-Service Query, DST, T9 Input, 9 Digit User ID, Scheduled Bell, Photo ID, Lock, sensor, Exit button.<br><b>Optional:</b> ID/Mifare Cards                                                                                                                                                                                                                            | <b>68 640</b>  |
| Face T&A and A&C Device | 3" Color Display     | VF380   |    | Face Capacity: 3000(1:N)<br>ID Card Capacity: 50,000/100,000(optional)<br>Record Capacity: 1,000, 000<br>Communication: TCP/IP, USB-host<br>Standard Functions: ID Card, Automatic Status switch, T9 input, Photo ID, Work Code, DST, Self Service Query, Short Message, Schedule-bell<br>Access Control Ineterface forThird Party Electric Lock, Door Sensor and Eixt Button<br>Optional:ADMS, MF Card, Wi-Fi                                                                                                                                                                                                       | <b>122 304</b> |
| Face T&A and A&C Device | 3" Color Display     | VF680   |    | Face Capacity: 3000(1:N)<br>ID Card Capacity: 50,000/100,000(optional)<br>Record Capacity: 1,000, 000<br>Communication: TCP/IP, USB-host<br>Standard Functions: ID Card, Automatic Status switch, T9 input, Photo ID, Work Code, DST, Self Service Query, Short Message, Schedule-bell<br>Access Control Ineterface forThird Party Electric Lock, Door Sensor and Eixt Button<br>Optional:ADMS, MF Card, Wi-Fi                                                                                                                                                                                                       | <b>122 304</b> |
| Face T&A and A&C Device | 3" Color Display     | VF780   |   | Face Capacity: 3000(1:N)<br>ID Card Capacity: 50,000/100,000(optional)<br>Record Capacity: 1,000, 000<br>Communication: TCP/IP, USB-host<br>Standard Functions: ID Card, Automatic Status switch, T9 input, Photo ID, Work Code, DST, Self Service Query, Short Message, Schedule-bell<br>Access Control Ineterface forThird Party Electric Lock, Door Sensor and Eixt Button<br>Optional:ADMS, MF Card, Wi-Fi                                                                                                                                                                                                       | <b>122 304</b> |
| Face T&A Device         | 2.8" Color Display   | KF160   |  | <b>Face Capacity: 1500</b><br><b>ID Card Capacity: 2000 (Optional)</b><br><b>Record Capacity: 100, 000</b><br><b>Communication: TCP/IP, USB-host</b><br><b>Standard Functions: SMS, DST, Scheduled-bell, Self-sevice Qquery, Automatic Status Switch, T9 input, Photo ID, Camera, Multi-verification, RS232 Printer, 3rd party electric lock, Exit Button, Alarm.</b><br><b>Optional: ID/Mifare Cards, Work Code, ADMS (Optional Wi-Fi: 18720 тт)</b>                                                                                                                                                                | <b>87 360</b>  |
| Face T&A Device         | 2.8" Color Display   | KF460   |  | <b>Face Capacity: 1500</b><br><b>Card Capacity(Optional): 2000 (Optional)</b><br><b>Record Capacity: 100,000</b><br><b>Communication: TCP/IP, USB-host</b><br><b>Standard Functions: SMS, DST, Scheduled-bell, Self-sevice Qquery, Automatic Status Switch, T9 input, Photo ID, Camera, Multi-verification, RS232 Printer, 3rd party electric lock, Exit Button, Alarm.</b><br><b>Optional: ID/Mifare Cards, Work Code, ADMS (Optional Wi-Fi: 18720 тт)</b>                                                                                                                                                          | <b>87 360</b>  |
| Face T&A Device         | 2.4-inch TFT Display | LFace10 |  | <b>OS: Linux</b><br><b>Memory: 256MB RAM/256MB Flash</b><br><b>Communication:USB Host</b><br><b>User Capacity : 100(Optional:500)</b><br><b>Face Capacity: 100(Optional:500 6240 тт~12480 тт )</b><br><b>Transaction Capacity: 50,000(Optional:150,000)</b><br><b>AC Adapter: 5V, 2A</b><br><b>Operating Temperature: 0°C- 45°C</b><br><b>Operating Humidity: 20%-80%</b><br><b>Standard Functions : DST, Self-service Query, Automatic Status Switch, T9 Input, Camera, 9-digit User ID, Bell Scheduling, SSR</b><br><b>Dimensions(W*H*D) : 98 *160 * 27.72 (mm)</b><br><b>Installation:</b><br><b>Wall mounted</b> | <b>47 424</b>  |

|                 |                      |                                     |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |        |
|-----------------|----------------------|-------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| Face T&A Device | 4.3-inch TFT Display | EFace10                             |    | <b>OS: Linux</b><br><b>Memory: 256MB RAM/512MB Flash</b><br><b>Communication: TCP/IP, Wi-Fi (Optional), USB Host</b><br><b>Face Capacity: 500(Optional:1,500 6240 π~12480 π)</b><br><b>User/Card Capacity: 1,000(Optional:1,500)</b><br><b>Transaction Capacity: 150,000</b><br><b>AC Adapter: 12V 1.5A</b><br><b>Operating Temperature: 0°C- 45°C</b><br><b>Operating Humidity: 20%-80%</b><br><b>Standard Functions: ADMS, Work Code, DST, Self-service Query, Automatic Status Switch, T9 Input, Camera, 9-digit User ID, Multiple Verification Methods, Bell Scheduling</b><br><b>Optional Functions: Wi-Fi (6240 π), ID Card (6240 π), MF Card (14976 π), Backup Battery (6240 π)</b><br><b>Access Control Interface: 3rd Party Electric Lock, Door Sensor, Exit Button</b><br><b>Optional Functions: Wi-Fi (6240 π), ID Card (6240 π), MF Card (14976 π)</b><br><b>Compatibility: ZKBioAccess IVS (T&amp;A)</b><br><b>Dimensions(W*H*D): 130 * 119 * 28 (mm) / 130*119*55 (mm)</b><br><b>Installation:</b><br><b>Wall mounted (Standard) / Desktop installation (Optional)</b> | 68 640 |
| Face T&A Device | 4.3-inch TFT Display | EFace10 Kit                         |  | <b>EFace 10 *1 (Optional: ID / MF / Felica / Wi-Fi / Backup battery)</b><br><b>-Electric Magnetic lock, X02116047 LM-2805 *1</b><br><b>-Lock Bracket:</b><br><b>X02117011 LMB-280L *1</b><br><b>X02117012 LMB-280Z *1</b><br><b>-Touchless Exit: X01501055 TLEB102 *1</b><br><b>-Card: 10*X00101011 ID Card (Optional X00102007 MF Card)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 97 344 |
| Face T&A Device | 2.8-inch TFT Display | MB10-VL                             |  | <b>OS: Linux</b><br><b>Memory: 256MB RAM/256MB Flash</b><br><b>Communication: TCP/IP, USB Host, Wi-Fi (optional)</b><br><b>User/Card Capacity : 500(Optional:800)</b><br><b>Face Capacity: 100(Optional: 800 6240 π)</b><br><b>Fingerprint Capacity : 500(Optional:800)</b><br><b>Transaction Capacity: 50,000(Optional:150,000)</b><br><b>AC Adapter: 5V, 2A (Optional : 12V 1.5A 6240 π)</b><br><b>Operating Temperature: 0°C- 45°C</b><br><b>Operating Humidity: 20%-80%</b><br><b>Standard Functions : ADMS, DST, Self-service Query, Automatic Status Switch, T9 Input, Camera, 9-digit User ID, Multiple Verification Methods, Bell Scheduling, SSR</b><br><b>Access Control Interface: 3rd Party Electric Lock, Door Sensor, Exit Button</b><br><b>Compatibility: ZKBioAccess IVS (T&amp;A)</b><br><b>Dimensions(W*H*D) : 168.0*151.5*31.7 (mm)</b><br><b>Installation :</b>                                                                                                                                                                                                  | 56 160 |
| Face T&A Device | 2.8-inch TFT Display | MB20-VL                             |  | <b>OS: Linux</b><br><b>Memory: 256MB RAM/256MB Flash</b><br><b>Communication: TCP/IP, USB Host, Wi-Fi (optional)</b><br><b>User/Card Capacity : 500(Optional:800)</b><br><b>Face Capacity: 100(Optional:800 6240 π )</b><br><b>Fingerprint Capacity : 500(Optional:800)</b><br><b>Transaction Capacity: 50,000(Optional:150,000)</b><br><b>AC Adapter: 5V, 2A (Optional : 12V 1.5A 6240 π)</b><br><b>Operating Temperature: 0°C- 45°C</b><br><b>Operating Humidity: 20%-80%</b><br><b>Standard Functions : ADMS, DST, Self-service Query, Automatic Status Switch, T9 Input, Camera, 9-digit User ID, Multiple Verification Methods, Bell Scheduling, SSR</b><br><b>Access Control Interface: 3rd Party Electric Lock, Door Sensor, Exit Button</b><br><b>Optional Functions: Wi-Fi (6240 π), ID Card (6240 π), MF Card (14976 π)</b><br><b>Compatibility: ZKBioAccess IVS (T&amp;A)</b><br><b>Dimensions(W*H*D) : 161.93*152.93*31.50 (mm)</b><br><b>Installation :</b>                                                                                                             | 56 160 |
| Face T&A Device | 2.8" Touch Display   | Horus TL2 (Upgraded from Horus TL1) |  | <b>OS: Linux</b><br><b>Memory: 512MB RAM / 512MB ROM</b><br><b>Communication: Wi-Fi、 TCP/IP</b><br><b>Visible light and near infrared facial recognition</b><br><b>Face Capacity: 800</b><br><b>Transaction Capacity: 150,000</b><br><b>AC Adapter: 5V, 1.5A</b><br><b>Operating Temperature: 0°C- 45°C</b><br><b>Operating Humidity: 10%-90%</b><br><b>Standard Functions : ADMS, T9 Input,Simple Access, DST, Camera, 9 digit user ID, Work Code, Self-service Query, Schedule Bell, Automatic Status Switch</b><br><b>Installation :</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 68 640 |



|                   |                  |                |                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |         |
|-------------------|------------------|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Android Series    | Horus H1 Series  | Horus H1       |                                                                                                                                                                                  | Hybrid Biometric & QR code Handheld Mobile Time Attendance Terminal<br>Android 10.0<br>High speed eight core 64 bit 2.0 GHz<br>y 5.5 inch IPS Capacitive LCD touch screen, resolution of 720 * 1440<br>User: 50,000, Face: 50,000, IC Card: 50,000;<br>Fingerprint(optional 49920 tr): 30,000<br>Logs Capacity 1,000,000<br>Camera: Dual Lens Rear camera (13 megapixels); Front camera (5 megapixels)<br>OS: Android 8.1                                                                                                                                                                                                                                                                                                                   | 536 640 |
| Face T&A Device   | 5" Touch Display | Horus E1       |                                                                                                                                                                                  | Memory: 2G RAM / 16G ROM<br>Communication: Wi-Fi, blue tooth, 4G, USB, GPS/A-GPS<br>Face Capacity: 6,000(1:N)(10,000 Optional6240 tr)<br>Transaction Capacity: 200,000<br>AC Adapter: 12V, 2A<br>Operating Temperature: -10°C- 50°C<br>Operating Humidity: 20%-80%RH<br>Standard Functions : Time attendance firmware,USB update, bell, time status, data management<br>SDK: TA PUSH SDK<br>Installation :<br>Wall mounted<br>(optional desktop bracket1872 tr)<br>(Optional Single power or 86 box adapter board1872 tr)                                                                                                                                                                                                                   | 187 200 |
| Face T&A Device   | 5" Touch Display | Horus E1       |                                                                                                                                                                                | With Backup battery It can stand by for more than 8 hours with a full battery (turn off Wi-Fi, 3G, 4G, Bluetooth), full charge in 5-6 hours<br>OS: Android 8.1<br>Memory: 2G RAM / 16G ROM<br>Communication: Wi-Fi, blue tooth, 4G, USB, GPS/A-GPS<br>Face Capacity: 6,000(1:N)(10,000 Optional6240 tr)<br>Transaction Capacity: 200,000<br>AC Adapter: 12V, 2A<br>Operating Temperature: -10°C- 50°C<br>Operating Humidity: 20%-80%RH<br>Standard Functions : Time attendance firmware,USB update, bell, time status, data management                                                                                                                                                                                                      | 233 376 |
| Face T&A Device   | 5" Touch Display | Horus E1-RFID  |                                                                                                                                                                                | <b>Base On Horus E1 Adding following function:</b><br><b>RFID : 10,000 ID standard (MF Optional + 8736 tr)</b><br><b>Communication : TCP/IP, RS485</b><br><b>Optional : Access control module DM10 (16224 tr)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 199 680 |
| Face T&A Device   | 5" Touch Display | Horus E1-FP    |                                                                                                                                                                                | <b>Base On Horus E1 Adding following function:</b><br><b>FP: 6,000/10,000 Optional</b><br><b>RFID : 10,000 ID standard (MF Optional8736 tr)</b><br><b>Communication : TCP/IP, RS485</b><br><b>Optional : Access control module DM10 (16224 tr)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 224 640 |
| Finger T&A Device | 7" Touch Display | Zpad Plus      | <br><br> | OS: Android 7.1<br>Fingerprint Capacity: 2,000 (Max 3,000)<br>ID Card Capacity optional: 10,000<br>Record Capacity: 1,000,000<br>Communication: Ethernet, WiFi, Bluetooth, USB-host<br>Memory : 2GB RAM<br>Optional : 4G (6240 tr) POE (24960 tr) ,<br>Optional: ID/MF/Desfire (B133, 3in1 card module), PoE<br>Standard Functions: 7-inch 1024x600, SilkID, Relay switching, Multi-point Data Collection, Work code, Work Shift, Attendance Widget, Attendance Reports, Customize Interface, Short Message, DST, Scheduled-Bell, Self-Service Query, Automatic Status Switch, Photo ID, Attendance Capture Photos<br>Software :<br>1. BioTime Web (Max 50users, Built in webserver)<br>2. GoTimeCloud (EU cloud solution)<br>3. BioTime8.0 | 180 960 |
| Finger T&A Device | 7" Touch Display | Zpad Plus-RFID | <br>                                                                                        | <b>Based on Zpad Plus, remove FP</b><br><b>ID standard</b><br><b>ID/MF/Desfire (B133, 3in1 card module) optional</b><br><b>Optional : 4G (6240 tr) POE (24960 tr)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 162 240 |



|                                |                    |           |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                |
|--------------------------------|--------------------|-----------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Standalone Device              | 2.8inch TFT        | MB560-VL  |    | Display: 2.8-inch TFT Screen<br>Face capacity: 3,000(Optional:5000)<br>Fingerprint Capacity: 3,000(Optional:5000)<br>Card Capacity: 10,000 (Optional)<br>Transactions: 100,000(Optional:200,000)<br>Communication: TCP/IP, WIFI (Optional) USB-Host,<br>Standard functions: ADMS, Automatic Status Switch, T9<br>input, 9 Digit User ID, Work Code, DST, Self Service<br>Query, Schedule-bell, Multilpe Verify Mode<br>Access Control Interface: 3rd Party Electric Lock, Door<br>Sensor, Exit Button<br>Optional functions: Wi-Fi (6240 tr) ID Card (6240 tr), MF<br>Card (14976 tr)<br>Compatibility: BioTime8.0<br>AC Adapter: 12V / 1.5A<br>Recomendend:upgrade capacity,6240 tr~12480 tr | <b>134 784</b> |
| Fingerprint T&A Device         | 3.5" Color Display | S922      |    | <b>Fingerprint Capacity: 50, 000</b><br><b>ID Card Capacity:50, 000</b><br><b>Record Capacity: 800, 000</b><br>Communication: TCP/IP, USB Host<br>Standard Functions: Work Code, DST, Short Message,<br>Self Service Query, 9 Digit User ID, T9 luput, Automatic<br>Status Switch, Photo ID, ADMS, Backup Battery<br><b>Optional: HID Card, MF Card, Wi-Fi, GPS, 3G/4G</b><br>* IP65 rated waterproof and dustproof protection grade<br>* Shockproof (0.5m above the ground)<br>* Rubber coated protection                                                                                                                                                                                    | <b>312 000</b> |
| Fingerprint T&A Device         | 3.5" Color Display | iClock260 |  | Fingerprint Capacity: 8000<br>ID Card Capacity:10, 000 (Optional)<br>Record Capacity: 200, 000<br>Communication: TCP/IP, RS232/485, USB (host&client)<br>Standard Functions: Work Code, DST, Short Message,<br>Self Service Query, 9 Digit User ID, Schedule-bell, T9<br>Input, Automatic Status Switch, Photo ID<br>Optional: MF Card, Websever, ADMS, Multilpe Verify<br>Mode, External Bell and Printer                                                                                                                                                                                                                                                                                    | <b>134 784</b> |
| Fingerprint T&A Device         | 3.5" Color Display | iClock360 |  | Fingerprint Capacity: 8000<br>ID Card Capacity:10, 000 (Optional)<br>Record Capacity: 200, 000<br>Communication: TCP/IP, RS232/485, USB (host&client)<br>Standard Functions: Work Code, DST, Short Message,<br>Self Service Query, 9 Digit User ID, Schedule-bell, T9<br>Input, Automatic Status Switch, Photo ID<br>Optional: MF Card, Wi-Fi, Websever, ADMS, Multilpe<br>Verify Mode, External Bell and Printer                                                                                                                                                                                                                                                                             | <b>134 784</b> |
| Fingerprint T&A and A&C Device | 3.5" Color Display | iClock580 |  | Fingerprint Capacity:8000<br>ID Card Capacity:10, 000 (Optional)<br>Record Capacity: 200, 000<br>Communication: TCP/IP, RS232/485, USB (host&client),<br>Wiegand Out&In,<br>Standard Functions: Work Code, DST, Short Message,<br>Self Service Query, 9 Digit User ID, T9 luput, Schedule-<br>bell, Automatic Status Switch, Photo ID, Anti-passback<br>Access Control Interface for Third Party Electric Lock,<br>Door Sensor and Exit Button, Alarm                                                                                                                                                                                                                                         | <b>184 704</b> |
| Fingerprint T&A Device         | 3.5" Color Display | iClock660 |  | Fingerprint Capacity: 8000<br>ID Card Capacity:10, 000 (Optional)<br><b>Record Capacity: 100, 000</b><br>Communication: TCP/IP, RS232/485, <b>USB host</b><br>Standard Functions: Work Code, DST, Short Message,<br>Self Service Query, 9 Digit User ID, Schedule-bell, T9<br>Input, Automatic Status Switch, Photo ID, Camera<br>Optional: MF Card, Wi-Fi, GPRS, 3G/4G, Websever,<br>ADMS, Multilpe Verify Mode, External Bell and Printer                                                                                                                                                                                                                                                   | <b>172 224</b> |
| Fingerprint T&A and A&C Device | 3.5" Color Display | iClock680 |  | Fingerprint Capacity: 8000<br>ID Card Capacity:10, 000 (Optional)<br>Record Capacity: 200, 000<br>Communication: TCP/IP, RS232/485, USB Host, Wiegand<br>Out&In,<br>Standard Functions: Work Code, DST, Short Message,<br>Self Service Query, 9 Digit User ID, T9 luput, Schedule-<br>bell, Automatic Status Switch, Photo ID, Multilpe Verify<br>Mode, Anti-passback, Camera<br>Access Control Interface for Third Party Electric Lock                                                                                                                                                                                                                                                       | <b>197 184</b> |
| Fingerprint T&A and A&C Device | 3.5" Color Display | iClock700 |  | Fingerprint Capacity:8000<br>ID Card Capacity:10, 000 (Optional)<br>Record Capacity: 200, 000<br>Communication: TCP/IP, RS232/485, USB (host&client),<br>Wiegand Out&In,<br>Standard Functions: Webserve, Work Code, DST, Short<br>Message, Self Service Query, 9 Digit User ID, T9 luput,<br>Schedule-bell, Automatic Status Switch, Photo ID, Anti-<br>passback, Camera, Backup Battery<br>Access Control Interface for Third Party Electric Lock.                                                                                                                                                                                                                                          | <b>197 184</b> |

|                                |                    |                            |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                |
|--------------------------------|--------------------|----------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Fingerprint T&A and A&C Device | 3.5" Color Display | iClock880                  |    | Fingerprint Capacity: 8000<br>ID Card Capacity:10, 000 (Optional)<br>Record Capacity: 200, 000<br>Communication: TCP/IP, RS232/485, USB Host, Wiegand Out&In,<br>Standard Functions: Webserve, Work Code, DST, Short Message, Self Service Query, 9 Digit User ID, T9 Input, Schedule-bell, Automatic Status Switch, Photo ID, Anti-passback, Multiple Verify Mode, Camera, Backup Battery                                                             | <b>197 184</b> |
| Fingerprint T&A and A&C Device | 3.5" Color Display | lclock990                  |    | Fingerprint Capacity: 8000<br>ID Card Capacity:10, 000<br>Record Capacity: 200, 000<br>Communication: TCP/IP, RS232/485, USB (host&client), Wiegand Out&In,<br>Standard Functions: Webserve, Work Code, DST, Short Message, Self Service Query, 9 Digit User ID, T9 Input, Schedule-bell, Automatic Status Switch, Photo ID, Anti-passback, Backup Battery<br>Access Control Interface for Third Party Electric Lock                                   | <b>197 184</b> |
| RFID T&A Device                | 3.5" Color Display | S500                       |    | ID Card Capacity:10, 000<br>Record Capacity: 50, 000<br>Communication: TCP/IP, RS232/485, USB (host&client)<br>Standard Functions: Work Code, DST, Short Message, Self Service Query, 9 Digit User ID, T9 Input, Schedule-bell, Automatic Status Switch, Photo ID<br>Optional: MFCard, ADMS, Webserve, External Printer and Bell, Multiple Verify Mode                                                                                                 | <b>118 560</b> |
| RFID T&A and A&C Device        | 3.5" Color Display | US900R<br>(Old Name: S680) |  | ID Card Capacity:10, 000<br>Record Capacity: 50, 000<br>Communication:TCP/IP, RS232/485, USB (host&client), Wiegand Out&In<br>Standard Functions: Work Code, DST, Short Message, Self Service Query, 9 Digit User ID, T9 Input, Schedule-bell, Automatic Status Switch, Photo ID, Anti-passback<br>Access Control Interface for Third Party Electric Lock, Door Sensor and Exit Button, Alarm<br>Optional: MFCard, Wi-Fi, 4G, ADMS, Webserve, External | <b>131 040</b> |
| RFID T&A and A&C Device        | 3.5" Color Display | S880                       |  | ID Card Capacity: 50, 000<br>Record Capacity: 150, 000<br>Communication: TCP/IP, RS232/485, USB Host, Wiegand Out&In<br>Standard Functions: Work Code, DST, Short Message, Self Service Query, 9 Digit User ID, T9 Input, Schedule-bell, Automatic Status Switch, Photo ID, Anti-passback, Camera<br>Access Control Interface for Third Party Electric Lock, Door Sensor and Exit Button, Alarm                                                        | <b>137 280</b> |
| Fingerprint T&A and A&C Device | 3.5" Color Display | S900                       |  | Fingerprint Capacity: 8000<br>ID Card Capacity:10, 000 (Optional)<br>Record Capacity: 200, 000<br>Communication: TCP/IP, RS232/485, Wiegand Out&In, USB Host<br>Standard Functions: Work Code, DST, Short Message, Self Service Query, 9 Digit User ID, Schedule-bell, Automatic Status Switch, Photo ID<br>Access Control Interface for Third Party Electric Lock, Door Sensor and Exit Button, Alarm                                                 | <b>230 880</b> |
| Fingerprint T&A and A&C Device | 3.5" Color Display | S920                       |  | Fingerprint Capacity: 5000 (Mercury )<br>ID Card Capacity: 30, 000 (Optional)<br>Record Capacity: 200, 000<br>Communication: TCP/IP, RS232/485, Wiegand Out&In, USB Host<br>Standard Functions: Work Code, DST, Short Message, Self Service Query, 9 Digit User ID, T9 Input, Schedule-bell, Automatic Status Switch, Multiple Verify Mode<br>Access Control Interface for Third Party Electric Lock, Door Sensor and Exit Button, Alarm               | <b>486 720</b> |
| Fingerprint T&A Device         | 3" Color Display   | LP400                      |                                                                                     | Fingerprint Capacity: 3000<br>ID Card Capacity:10, 000 (Optional)<br>Record Capacity:100, 000<br>Communication: TCP/IP, USB Host<br>Standard Functions: Work Code, DST, Self Service Query, 9 Digit User ID, Schedule-bell, Automatic Status Switch, Printer<br>Optional: MF Card, ADMS, Built-in Battery                                                                                                                                              | <b>330 720</b> |
| Fingerprint T&A Device         | 2.8" Color Display | IN05                       |  | <b>Fingerprint Capacity:</b> 3000<br><b>ID Card Capacity:</b> 10,000 (Optional)<br><b>Record Capacity:</b> 100,000<br><b>Communication:</b> TCP/IP, USB host, RS232<br><b>Standard Functions:</b> Wi-Fi, Work Code, DST, Self Service Query, 9 Digit User ID, Schedule-bell, Multiple Verify Mode, Automatic Status Switch, Built-in Battery<br><b>Optional:</b> ID/MF/HID, Webserver, ADMS, 3G, External Bell, POE                                    | <b>124 800</b> |



|                                             |                    |               |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                |
|---------------------------------------------|--------------------|---------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Palm and Fingerprint and T&A and A&C Device | 2.8" Color Display | P260          |    | <b>Fingerprint Capacity:</b> 3000<br><b>Palm:</b> 600<br><b>ID Card Capacity:</b> 10,000 (Optional)<br><b>Record Capacity:</b> 100,000<br><b>Communication:</b> TCP/IP, USB host, RS232 for external printer, RS485 for external FP reader.<br><b>Standard Functions:</b> Wi-Fi, Work Code, DST, Short Message, Self Service Query, 5 Digit User ID, Multiple Verify Mode, T9 Input, Automatic Status Switch, Backup Battery, Wiegand In&Out, Anti-passback.                                           | <b>131 040</b> |
| Fingerprint T&A and A&C Device              | 2.8" Color Display | IN05-A        |    | <b>Fingerprint Capacity:</b> 3000<br><b>ID Card Capacity:</b> 10,000 (Optional)<br><b>Record Capacity:</b> 100,000<br><b>Communication:</b> TCP/IP, USB host, RS232 for external printer, RS485 for external FP reader.<br><b>Standard Functions:</b> Wi-Fi, Work Code, DST, Short Message, Self Service Query, 5 Digit User ID, Multiple Verify Mode, T9 Input, Automatic Status Switch, Backup Battery, Wiegand In&Out, Anti-passback.<br><b>Optional:</b> ID/MF/HID, 4G, Webserver, ADMS, Photo ID. | <b>137 280</b> |
| Fingerprint T&A Device                      | 2.8" Color Display | IN01          |    | Fingerprint Capacity: 3000<br>ID Card Capacity: 10,000 (Optional)<br>Record Capacity: 100,000<br>Communication: TCP/IP, USB (host & client)<br>Standard Functions: Work Code, DST, Self Service Query, 9 Digit User ID, Schedule-bell, Multiple Verify Mode, Automatic Status Switch, Built-in Battery<br>Optional: MF Card, Webserver, ADMS, Wi-Fi, GPRS, 3G/4G, External Bell                                                                                                                        | <b>124 800</b> |
| Fingerprint T&A and A&C Device              | 2.8" Color Display | IN01-A        |  | Fingerprint Capacity: 3000<br>ID Card Capacity: 10,000 (Optional)<br>Record Capacity: 100,000<br>Communication: TCP/IP, USB (host & Client), RS232/485<br>Standard Functions: Work Code, DST, Short Message, Self Service Query, 5 Digit User ID, Multiple Verify Mode, T9 Input, Automatic Status Switch, Backup Battery, Wiegand In&Out, Anti-passback<br>Optional: ID/MF/HID Card, Wi-Fi, GPRS, 3G/4G, Webserver, ADMS, Photo ID, External Bell, Schedule-                                          | <b>137 280</b> |
| Fingerprint T&A Device                      | 3" Color Display   | IN02          |                                                                                     | Fingerprint Capacity: 3000<br>ID Card Capacity: 10,000 (Optional)<br>Record Capacity: 100,000<br>Communication: TCP/IP, USB (host & client)<br>Standard Functions: Work Code, DST, Self Service Query, 9 Digit User ID, Schedule-bell, Multiple Verify Mode, Automatic Status Switch, Built-in Battery                                                                                                                                                                                                 | <b>124 800</b> |
| Fingerprint T&A and A&C Device              | 3" Color Display   | IN02-A        |                                                                                     | Fingerprint Capacity: 3000<br>ID Card Capacity: 10,000 (Optional)<br>Record Capacity: 100,000<br>Communication: TCP/IP, USB (host & Client), RS232/485<br>Standard Functions: Work Code, DST, Short Message, Self Service Query, 5 Digit User ID, Multiple Verify                                                                                                                                                                                                                                      | <b>137 280</b> |
| Fingerprint T&A and A&C Device              | 2.8" Color Display | U990-C        |  | Fingerprint Capacity: 3000<br>ID Card Capacity: 10,000 (Optional)<br>Record Capacity: 100,000<br>Communication: TCP/IP, RS232/485, Wiegand Out&In, USB (host & Client)<br>Standard Functions: Webserve, Work Code, DST, Short Message, Self Service Query, 5 Digit User ID, Schedule-bell, Automatic Status Switch, Anti-passback, Backup Battery<br>Access Control Interface for Third Party Electric Lock                                                                                            | <b>137 280</b> |
| Fingerprint T&A Device                      | 3" Color Display   | IN03          |  | Fingerprint Capacity: 3000<br>ID Card Capacity: 10,000 (Optional)<br>Record Capacity: 100,000<br>Communication: TCP/IP, RS232/485, USB Host<br>Standard Functions: Work Code, DST, Self Service Query, 9 Digit User ID, T9 Input, Schedule-bell, Automatic Status Switch, Simple Access Control, Built-in Battery<br>Optional: MF Card, Webserver, ADMS, Photo ID, Multiple Verify Mode, External Bell and Printer                                                                                     | <b>124 800</b> |
| Fingerprint T&A Device                      | 3" Color Display   | IN04          |  | Fingerprint Capacity: 3000<br>ID Card Capacity: 10,000 (Optional)<br>Record Capacity: 100,000<br>Communication: TCP/IP, RS232/485, USB Host<br>Standard Functions: Work Code, DST, Self Service Query, 9 Digit User ID, T9 Input, Schedule-bell, Automatic Status Switch, Built-in Battery, Simple Access Control<br>Optional: MF Card, Webserver, ADMS, Photo ID, Multiple Verify Mode, External Bell and Printer                                                                                     | <b>124 800</b> |
| Palm&Fingerprint T&A and A&C Terminal       | 2.8" TFT Display   | P160 (ZMM720) |  | <b>Palm Capacity:</b> 1000<br><b>Fingerprint Capacity:</b> 3000<br><b>ID Card Capacity:</b> 10,000 (Optional)<br><b>Record Capacity:</b> 500,000<br><b>Communication:</b> TCP/IP, USB Host, Wi-Fi (Optional)<br><b>Standard Functions:</b> BioID, Work Code, SMS, DTS, Scheduled-bell, Self-Service Query, Automatic Status Switch, T9 Input, Photo ID, Multi-Verification, RS232 Printer, AC1: Exit Button + 12V AC Adapter Out + 2*Relay + 1*AUX IN.                                                 | <b>106 080</b> |



|                        |                    |              |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                        |                |
|------------------------|--------------------|--------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Fingerprint T&A Device | 2.8" Color Display | SilkFP-101TA |    | <b>Fingerprint Capacity:</b> 3000<br><b>ID Card Capacity:</b> 10, 000 (Optional)<br><b>Record Capacity:</b> 100,000<br><b>Communication:</b> TCP/IP, USB(Host and Client)<br><b>Standard Functions:</b> Webserver, Work Code, SMS, DST, Scheduled-bell, Self-Service Query, Automatic Status Switch, T9 Input, 9 digit user ID, Photo ID<br><b>Optional:</b> ID/Mifare, Wi-Fi, External Bell, ADMS     | <b>122 304</b> |
| Fingerprint T&A Device | 3" Color Display   | A11-C        |    | Fingerprint Capacity: 3000<br>ID Card Capacity:10, 000 (Optional)<br>Record Capacity: 100, 000<br>Communication: TCP/IP, RS232/485, USB Host<br>Standard Functions: Webserver, Work Code, DST, Short Message, Self Service Query, 9 Digit User ID, Schedule-bell, Automatic Status Switch<br>Optional: MF Card, ADMS, Photo ID, Multilpe Verify Mode, Simple Access Control, External Bell and Printer | <b>112 320</b> |
| Fingerprint T&A Device | 3" Color Display   | B3-C         |    | Fingerprint Capacity: 3000<br>ID Card Capacity:10, 000 (Optional)<br>Record Capacity: 100, 000<br>Communication: TCP/IP, RS232/485<br>Standard Functions: Work Code, DST, Short Message, Self Service Query, 5 Digit User ID, Schedule-bell, Automatic Status Switch<br>Optional: MF Card, USB Host, Webserver, ADMS, Photo ID, Multilpe Verify Mode, Simple Access Control, External Bell and Printer | <b>118 560</b> |
| Fingerprint T&A Device | 2.8" Color Display | X628-C       |  | Fingerprint Capacity: 3000<br>ID Card Capacity:10, 000 (Optional)<br>Record Capacity: 100, 000<br>Communication: TCP/IP, RS232/485, USB Host<br>Standard Functions: Work Code, DST, Short Message, Self Service Query, 5 Digit User ID, Schedule-bell, Automatic Status Switch<br>Optional: MF Card, Webserver, ADMS, Photo ID, Multilpe Verify Mode, Simple Access Control, External Bell and Printer | <b>112 320</b> |
| Fingerprint T&A Device | 2.8" Color Display | U160-C       |  | Fingerprint Capacity: 3000<br>ID Card Capacity:10, 000 (Optional)<br>Record Capacity: 100, 000<br>Communication: TCP/IP, RS232/485, USB (host&client)<br>Standard Functions: Work Code, DST, Short Message, Self Service Query, 5 Digit User ID, Schedule-bell, Automatic Status Switch<br>Optional: MF Card, Wi-Fi, Webserver, ADMS, Photo ID, Multilpe Verify Mode, External Bell and Printer        | <b>124 800</b> |
| Fingerprint T&A Device | 2.8" Color Display | U260-C       |  | Fingerprint Capacity: 3000<br>ID Card Capacity:10, 000 (Optional)<br>Record Capacity: 100, 000<br>Communication: TCP/IP, RS232/485, USB (host&client)<br>Standard Functions: Webserver, Work Code, DST, Short Message, Self Service Query, 5 Digit User ID, T9 Input, Schedule-bell, Automatic Status Switch<br>Optional: MF Card, ADMS, Photo ID, Multilpe Verify Mode, External Bell and Printer     | <b>124 800</b> |
| Fingerprint T&A Device | 2.8" Color Display | U300-C       |  | Fingerprint Capacity: 3000<br>ID Card Capacity:10, 000 (Optional)<br>Record Capacity: 100, 000<br>Communication: TCP/IP, RS232/485, USB (host&client)<br>Standard Functions: Work Code, DST, Short Message, Self Service Query, 5 Digit User ID, Schedule-bell, Automatic Status Switch<br>Optional: MF Card, Webserver, ADMS, Photo ID, Multilpe Verify Mode, External Bell and Printer               | <b>112 320</b> |
| Fingerprint T&A Device | 2.8" Color Display | UA100        |  | Fingerprint Capacity: 3000<br>ID Card Capacity: 30, 000 (Optional)<br>Record Capacity: 100, 000<br>Communication: TCP/IP, RS232/485, USB( host &client)<br>Standard Functions:Webserver, Work Code, DST, Self Service Query, 9 Digit User ID, T9 Input, Schedule-bell, Automatic Status Switch<br>Optional: MF Card, ADMS, Photo ID, External Bell and Printer                                         | <b>112 320</b> |
| Fingerprint T&A Device | 3" Color Display   | UA200        |  | Fingerprint Capacity: 3000<br>ID Card Capacity: 30, 000 (Optional)<br>Record Capacity: 100, 000<br>Communication: TCP/IP, RS232/485, USB( host &client)<br>Standard Functions: Webserver, Work Code, DST, Self Service Query, 9 Digit User ID, T9 Input, Schedule-bell, Automatic Status Switch<br>Optional: MF Card, ADMS, Photo ID, External Bell and Printer                                        | <b>112 320</b> |

|                                  |                    |        |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                |                |
|----------------------------------|--------------------|--------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Fingerprint T&A Device           | 2.8" Color Display | UA300  |    | Fingerprint Capacity: 3000<br>ID Card Capacity:10, 000 (Optional)<br>Record Capacity: 100, 000<br>Communication: TCP/IP, RS232/485, USB( host &client)<br>Standard Functions: Webserver, Work Code, DST, Self Service Query, 9 Digit User ID, T9 Input, Schedule-bell, Automatic Status Switch<br>Optional: MF Card, ADMS, Photo ID, External Bell and Printer                                                                                 | <b>112 320</b> |
| Fingerprint T&A Device           | 2.8" Color Display | UA400  |    | Fingerprint Capacity: 3000<br>ID Card Capacity:10, 000 (Optional)<br>Record Capacity: 100, 000<br>Communication: TCP/IP, RS232/485, USB( host &client)<br>Standard Functions: Webserver, Work Code, DST, Self Service Query, 9 Digit User ID, T9 Input, Schedule-bell, Automatic Status Switch<br>Optional: MF Card, ADMS, Multilpe Vertify Mode, External Printer                                                                             | <b>112 320</b> |
| RFID T&A Device                  | 2.8" Color Display | S160-C |    | ID Card Capacity: 30,000<br>Record Capacity: 100, 000<br>Communication: TCP/IP, RS232, USB (host&client)<br>Standard Functions: Work Code, DST, Short Message, Self Service Query, 9 Digit User ID, Schedule-bell, Automatic Status Switch<br>Optional: MFCard, HID Card, Wi-Fi, Webserve, ADMS, Photo ID, , External Printer and Belll, Multilpe Vertify Mode                                                                                 | <b>99 840</b>  |
| Fingerprint T&A and A&C Terminal | 2.8" Color Display | UA760  |  | <b>User Capacity: 3000</b><br><b>Fingerprint Capacity: 3000</b><br><b>Record Capacity: 50,000</b><br><b>Communication: Wi-Fi, TCP/IP, USB Host</b><br><b>Standard Functions: BioID, Wi-Fi, DST, Self Service Query, 9 Digit User ID, Automatic Status Switch, Schedule-bell, T9 Input, RS232 Print.</b><br><b>Access Control Interface: 3rd Party Electric Lock, Exict Button.</b><br><b>Optional: ID/MF, PUSH.Built-in batterrv (6240 тг)</b> | <b>91 104</b>  |
| Fingerprint T&A and A&C Terminal | 2.8" Color Display | UA860  |  | <b>User Capacity: 3000</b><br><b>Fingerprint Capacity: 3000</b><br><b>Record Capacity: 50,000</b><br><b>Communication: Wi-Fi, TCP/IP, USB Host</b><br><b>Standard Functions: BioID, Wi-Fi, DST, Self Service Query, 9 Digit User ID, Automatic Status Switch, Schedule-bell, T9 Input, RS232 Print.</b><br><b>Access Control Interface: 3rd Party Electric Lock, Exict Button.</b><br><b>Optional: ID/MF, PUSH.Built-in batterrv (6240 тг)</b> | <b>91 104</b>  |
| Fingerptint T&A Device           | 2.8" Color Display | D1     |  | <b>Fingerprint Capacity: 1000</b><br><b>Record Capacity: 50,000</b><br><b>Communication: WiFi(WLAN, USB host), USB Host</b><br><b>Standard Functions: BioID, DST, Self Service Query, 9 Digit User ID, Automatic Status Switch, Schedule-bell, T9 Input, SSR Report, Backup Battery.</b><br><b>Optional: None</b><br><b>Capatibility: zktime.net, zktime 5.0, zkaccess3.5</b><br><b>Note: Hotspot of WiFi work with TA Assistant APP.</b>      | <b>68 640</b>  |
| Fingerptint T&A Device           | 2.8" Color Display | D2     |  | <b>Fingerprint Capacity: 1000</b><br><b>Record Capacity: 50,000</b><br><b>Communication: WiFi(WLAN, USB host), USB Host</b><br><b>Standard Functions: BioID, DST, Self Service Query, 9 Digit User ID, Automatic Status Switch, Schedule-bell, T9 Input, SSR Report, Backup Battery.</b><br><b>Optional: None</b><br><b>Capatibility: zktime.net, zktime 5.0, zkaccess3.5</b><br><b>Note: Hotspot of WiFi work with TA Assistant APP.</b>      | <b>68 640</b>  |
| Fingerptint T&A Device           | 2.8" Color Display | WL10   |  | <b>Fingerprint Capacity: 1000/1500(without SSR)</b><br><b>Record Capacity: 50,000</b><br><b>Communication: WiFi(WLAN, USB host), USB Host</b><br><b>Standard Functions: BioID, DST, Self Service Query, 9 Digit User ID, Automatic Status Switch, Schedule-bell, T9 Input, SSR Report</b><br><b>Optional: None</b><br><b>Note: Hotspot of WiFi work with TA Assistant APP and Time Cube Cloud APP, right now, it's useless.</b>                | <b>56 160</b>  |
| Fingerptint T&A Device           | 2.8" Color Display | WL20   |  | <b>Fingerprint Capacity: 1000/1500 (without SSR)</b><br><b>Record Capacity: 50,000</b><br><b>Communication: WiFi(WLAN, USB host), USB Host</b><br><b>Standard Functions: BioID, DST, Self Service Query, 9 Digit User ID, Automatic Status Switch, Schedule-bell, T9 Input, SSR Report</b><br><b>Optional: None</b><br><b>Note: Hotspot of WiFi work with TA Assistant APP and Time Cube Cloud APP, right now, it's useless.</b>               | <b>58 656</b>  |



|                         |                    |              |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                  |                  |
|-------------------------|--------------------|--------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Fingerptint T&A Device  | 2.8" Color Display | WL30         |    | <b>Fingerprint Capacity:</b> 1000/1500 (without SSR)<br><b>Record Capacity:</b> 50,000<br><b>Communication:</b> WiFi(WLAN, USB host), USB Host<br><b>Standard Functions:</b> BioID, DST, Self Service Query, 9 Digit User ID, Automatic Status Switch, Schedule-bell, T9 Input, SSR Report<br><b>Optional:</b> None<br><b>Note:</b> Hotspot of WiFi work with TA Assistant APP and Time Cube Cloud APP, right now, it's useless. | <b>58 656</b>    |
| Face T&A and A&C Device | 2.8" Color Display | k40          |    | Fingerprint Capacity: 3,000/1,000(SSR function on)<br>ID Card Capacity: 1000(Optional)<br>Communication: TCP/IP, USB-host<br>Standard Functions: Work Code, SMS, DST, Self-Service Query, Automatic Status Switch, Scheduled-bell, T9 Input, 9 Digit User ID, Built-in Battery, Simple Access Control or External Bell<br>Optional : ID card, IC card                                                                            | <b>68 640</b>    |
| Fingerprint T&A Device  | 2.8" Color Display | K14          |    | Fingerprint Capacity: 3,000/1,000(SSR function on)<br>ID Card Capacity: 500 (Optional)<br>Record Capacity: 100, 000<br>Communication: TCP/IP, USB Host<br>Standard Functions: Work Code, Short Message, DST, Self Service Query, 9 Digit User ID, Automatic Status Switch, Schedule-bell, T9 Input, SSR Report<br>Optional: ID card, IC Card                                                                                     | <b>61 152</b>    |
| Face T&A and A&C Device | 2.8" Color Display | K20          |  | Fingerprint Capacity: 3,000/1,000(SSR function on)<br>ID Card Capacity: 500 (optional)<br>Record Capacity: 100, 000<br>Communication: TCP/IP, USB Host<br>Standard Functions: Work Code, Short Message, DST, Self Service Query, 9 Digit User ID, Automatic Status Switch, Schedule-bell, T9 Input, SSR Report, Multilpe Verify Mode, Simple Access Control, Backup Battery<br>Optional: ID card, IC Card or External Bell       | <b>68 640</b>    |
| Fingerprint T&A Device  | 2.8" Color Display | LX50         |  | Fingerprint Capacity: 500<br>User Capacity: 500<br>Record Capacity: 50, 000<br>Communication: USB Host and Client<br>Standard Functions: DST, Self Service Query, 9 Digit User ID, Automatic Status Switch, Schedule-bell, T9 Input, SSR Report                                                                                                                                                                                  | <b>34 944</b>    |
| Fingerprint T&A Device  | 2.8" Color Display | LX14         |  | Fingerprint Capacity: 500<br>User Capacity: 500<br>Record Capacity: 50, 000<br>Communication: USB Host and Client<br>Standard Functions: DST, Self Service Query, 9 Digit User ID, Automatic Status Switch, Schedule-bell, T9 Input, SSR Report                                                                                                                                                                                  | <b>34 944</b>    |
| Fingerprint T&A Device  | 2.8" Color Display | LX15         |  | Fingerprint Capacity: 500<br>User Capacity: 500<br>Record Capacity: 50, 000<br>Communication: USB Host and Client<br>Standard Functions: DST, Self Service Query, 9 Digit User ID, Automatic Status Switch, Schedule-bell, T9 Input, SSR Report                                                                                                                                                                                  | <b>34 944</b>    |
| Fingerprint T&A Device  | 2.8" Color Display | LX16         |  | Fingerprint Capacity: 500<br>User Capacity: 500<br>Record Capacity: 50, 000<br>Communication: USB Host and Client<br>Standard Functions: DST, Self Service Query, 9 Digit User ID, Automatic Status Switch, Schedule-bell, T9 Input, SSR Report                                                                                                                                                                                  | <b>34 944</b>    |
| Fingerprint T&A Device  | 2.8" Color Display | LX17         |  | Fingerprint Capacity: 500<br>User Capacity: 500<br>Record Capacity: 50, 000<br>Communication: USB Host and Client<br>Standard Functions: DST, Self Service Query, 9 Digit User ID, Automatic Status Switch, Schedule-bell, T9 Input, SSR Report                                                                                                                                                                                  | <b>34 944</b>    |
| SDK                     | Push SDK           | T&A Push SDK | T&A PUSH SDK                                                                        | All T&A PUSH SDK(include facial recognition api) (Does not include support).<br>One year free protocol upgrade.<br>Supported Hardware: FaceKiosk-V43, FaceKiosk-V32, FaceKiosk-H32, FaceKiosk-H21<br>Remarks: This package do not include any technical support<br>This package includes one year free warranty and upgrade.                                                                                                     | <b>2 496 000</b> |
|                         |                    |              | already bought T&A PUSH, just update                                                | SDK Annual Upgrade Fee (Does not include support).<br>Remarks: All SDK will come with one year free warranty, so the SDK upgrade service will begin in second years since purchased.                                                                                                                                                                                                                                             | <b>624 000</b>   |
|                         |                    |              | T&A PUSH SDK Technical Support (3 man-days Package)                                 | SDK Technical Support 3 man-days Package<br>Note:<br>1. This package will come with 3 man-days technical support<br>2. If end user needs more technical support man-days.                                                                                                                                                                                                                                                        | <b>898 560</b>   |




|                                |                    |                            |                                                       |                                                                                                                                                                                                                                                                                                                                       |                  |
|--------------------------------|--------------------|----------------------------|-------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
|                                |                    | AC Push SDK                | AC PUSH SDK                                           | AI AC PUSH SDK(include facial recognition api)<br>(Does not include support).<br>One year free protocol upgrade.<br>Supported Hardware: FaceDepot-7A, FaceDepot-7B, SpeedFace-V5, SpeedFace-H5<br>SDK Annual Upgrade Fee                                                                                                              | <b>2 496 000</b> |
|                                |                    |                            | already bought AC PUSH, just update                   | (Does not include support).<br>Remarks: All SDK will come with one year free warranty, so the SDK upgrade service will begin in second years since puchased.                                                                                                                                                                          | <b>624 000</b>   |
|                                |                    |                            | AC PUSH SDK Technical Support<br>(3 man-days Package) | SDK Technical Support 3 man-days Package<br>Note:<br>1. This package will come with 3 man-days technical support<br>2. If end user needs more technical support man-days.                                                                                                                                                             | <b>898 560</b>   |
| SDK                            | None               | Standalone SDK<br>PULL SDK |                                                       | The Standalone SDK and PULL SDK are packed together.<br>User could download it from www.zkteco.com website, including following content:<br>1. user manual for development;<br>2. Demo and source code.                                                                                                                               | <b>Бесплатно</b> |
| SDK                            | None               | PUSH SDK                   |                                                       | PUSH SDK is communication protocol base on HTTP, it work with ADMS function on terminal (the function has another name as Cloud Server)<br>Ther price only including following conctect:<br>1. User manual document for development.<br>2. PUSH SDK demo and source code<br>Note: The priece isn't within technical support services. | <b>2 496 000</b> |
| Fingerptint T&A Device         | 2.8" Color Display | D1S                        |                                                       | <del>Fingerprint Capacity: 400</del><br><b>Record Capacity: 10,000</b><br><b>Communication:</b> USB 2.0 (Host )<br><b>Standard Functions: Automatic Status Switch,Self</b>                                                                                                                                                            | <b>87 360</b>    |
| Fingerptint T&A Device         | 2.8" Color Display | D2S                        |                                                       | <del>Fingerprint Capacity: 400</del><br><b>Record Capacity: 10,000</b><br><b>Communication:</b> USB 2.0 (Host )<br><b>Standard Functions: Automatic Status Switch Self</b>                                                                                                                                                            | <b>87 360</b>    |
| Fingerprint T&A Device         | 3" Color Display   | US15C-B<br>(Bar code)      |                                                       | <del>Card Capacity:10, 000</del><br>Record Capacity: 100, 000<br>Communication: TCP/IP, RS232, USB Host<br><del>Standard Functions: Work Code DST Short Message</del>                                                                                                                                                                 | <b>124 800</b>   |
| Fingerprint T&A Device         | 3" Color Display   | US15C-B<br>(Bar code)      |                                                       | <del>Card Capacity:10, 000</del><br>Record Capacity: 100, 000<br>Communication: TCP/IP, RS232, USB Host<br><del>Standard Functions: Work Code DST Short Message</del>                                                                                                                                                                 | <b>118 560</b>   |
| Fingerprint T&A Device         | 3" Color Display   | US10C-M<br>(Stripe card)   |                                                       | <del>Card Capacity:10, 000</del><br>Record Capacity: 100, 000<br>Communication: TCP/IP, RS232, USB Host<br><del>Standard Functions: Work Code DST Short Message</del>                                                                                                                                                                 | <b>112 320</b>   |
| Fingerprint T&A Device         | 3" Color Display   | US15C-M<br>(Stripe card)   |                                                       | <del>Card Capacity:10, 000</del><br>Record Capacity: 100, 000<br>Communication: TCP/IP, RS232, USB Host<br><del>Standard Functions: Work Code DST Short Message</del>                                                                                                                                                                 | <b>106 080</b>   |
| Fingerprint T&A Device         | 3" Color Display   | US10C                      |                                                       | <del>Fingerprint Capacity: 3000</del><br>ID Card Capacity:10, 000<br>Record Capacity: 50, 000<br>Communication: TCP/IP, RS232, USB Host                                                                                                                                                                                               | <b>131 040</b>   |
| Fingerprint T&A Device         | 3" Color Display   | US15C-ID                   |                                                       | <del>Fingerprint Capacity: 3000</del><br>ID Card Capacity:10, 000<br>Record Capacity: 50, 000<br>Communication: TCP/IP, RS232, USB Host                                                                                                                                                                                               | <b>124 800</b>   |
| Fingerprint T&A and A&C Device | 3" B&W Display     | US10-M(Stripe card)        |                                                       | <del>Card Capacity:10, 000</del><br>Record Capacity:100, 000<br>Communication: TCP/IP, RS232, USB Host<br><del>Standard Functions: Work Code DST Short Message 5</del>                                                                                                                                                                | <b>106 080</b>   |
| Fingerprint T&A and A&C Device | 3" B&W Display     | US10-B(Bar code)           |                                                       | <del>Card Capacity:10, 000</del><br>Record Capacity:100, 000<br>Communication: TCP/IP, RS232, USB Host<br><del>Standard Functions: Work Code DST Short Message 5</del>                                                                                                                                                                | <b>118 560</b>   |

Прайс-лист на комплектующие для терминалов УРВ

| Тип           | Модель                            | Фото                                                                                                  | Параметры                                                                                                                    | Совместимое устройство | Цена розница |
|---------------|-----------------------------------|-------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|------------------------|--------------|
| T&A Accessory | 8G USB Disk                       |                      | Color:<br>Standard: Red<br>Optional (MOQ: 2000 pcs): White, Black, Silver.<br>Logo:<br>Standard: ZKTeco<br>Support customize |                        | 6 864        |
| T&A Accessory | ZK8500R ID/IC card sender moudle  |                      |                                                                                                                              |                        | 18 720       |
| T&A Accessory | ZK7600 Fingerprint Sensor         |                      | Use for ZK8500                                                                                                               |                        | 24 960       |
| T&A Accessory | iclock1000 main board/ID(A02)     |                     | Use for iclock3000                                                                                                           |                        | 99 840       |
| T&A Accessory | iclock1000 Keypad silicone        |                    | Use for iclock3000                                                                                                           |                        | 1 248        |
| T&A Accessory | iclock1000 Plastic keypad (13083) |                    | Use for iclock3000                                                                                                           |                        | 1 248        |
| T&A Accessory | iclock660 GPRS Gland (140103)     |                    | Use for iclock3000                                                                                                           |                        | 374          |
| T&A Accessory | ICLOCK660_CAM2 Camera Module      |                    | Use for iclock3000                                                                                                           |                        | 24 960       |
| T&A Accessory | ICLOCK660 interface board         |                    | Use for iclock3000                                                                                                           |                        | 14 976       |
| T&A Accessory | FINGER LITE main board            |                    | FINGER LITE-V1.6-151112                                                                                                      |                        | 34 944       |
| T&A Accessory | X50 Keypad silicone               |                    | Use for K40                                                                                                                  |                        | 1 248        |
| T&A Accessory | X50 Plastic keypad (13100)        |                    | Use for K40                                                                                                                  |                        | 1 248        |
| T&A Accessory | S60 Acrylic lens                  |                    | Use for K40                                                                                                                  |                        | 1 248        |
| T&A Accessory | U100 main board (5V)/ID (A27)     |                    | Use for UA200 (U100-V4.2-120320)                                                                                             |                        | 24 960       |
| T&A Accessory | UA200 Keypad silicone             |                    |                                                                                                                              |                        | 624          |
| T&A Accessory | UA200 Acrylic lens                |                    | 3" TFT Acrylic lens                                                                                                          |                        | 1 248        |
| T&A Accessory | UA200 Plastic keypad              |                    | Use for UA200                                                                                                                |                        | 1 248        |
| T&A Accessory | 3" TFT Screen                     |  | Use for UA200                                                                                                                |                        | 24 960       |
| T&A Accessory | K68 light panel                   |                    | Use for UA200                                                                                                                |                        | 624          |
| T&A Accessory | K88 Keyboard                      |                    | Use for UA200                                                                                                                |                        | 6 240        |
| T&A Accessory | U900-C TFT Backplane              |                    | Use for UA200                                                                                                                |                        | 6 240        |

|               |                                      |                                                                                     |                                                                        |              |               |
|---------------|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------|--------------|---------------|
| T&A Accessory | iclock580 lens                       |    |                                                                        |              | <b>3 494</b>  |
| T&A Accessory | iclock880 camera panel               |    |                                                                        |              | <b>1 248</b>  |
| T&A Accessory | iclock880 camera lens                |    |                                                                        |              | <b>624</b>    |
| Other         | Thermal printer rollers              |    |                                                                        |              | <b>9 984</b>  |
| Other         | MiFare Antenna                       |    |                                                                        | All terminal | <b>1 248</b>  |
| Other         | ID Antenna                           |    |                                                                        | All terminal | <b>874</b>    |
| Other         | TF1700 Mainboard /ID(A09)-VIP        |   | TF1700-V1.1-130410                                                     |              | <b>18 720</b> |
| Other         | 3" Touch Screen                      |  | D37-S2929A-ABB<br>(Resistance-type)<br>Dimension:<br>83.91*57.68*1.6mm |              | <b>12 480</b> |
| Other         | ZEM800 Core-board                    |  | ZEM800-V3.4-120829                                                     |              | <b>74 880</b> |
| Other         | TFT600                               |  | Black HG69504                                                          |              | <b>1 248</b>  |
| Other         | F10 Fingerprint sensor iron clip     |  |                                                                        |              | <b>998</b>    |
| Cable         | FFC                                  |  | Flat cable - The cable for connect fingerprint sensor and core-board.  |              | <b>374</b>    |
| Keypad board  | BZ600 Keypad board                   |  | Keypad board - for BZ701/600                                           |              | <b>4 992</b>  |
| Cover         | KP1510 back casing (ZKSM-10036)      |  | BZ701 back casing - for BZ701                                          |              | <b>3 744</b>  |
| Panel         | KP1510 acrylic panel                 |  | Front panel                                                            |              | <b>3 744</b>  |
| Other         | Paper cutting steel tooth            |  | Pressure paper roll with metalic support for printer door              |              | <b>624</b>    |
| Other         | BZ600 print bar fulcrum (ZKSM-10042) |  | Print bar fulcrum                                                      |              | <b>1 248</b>  |



|                    |                        |                                                                                     |                                                      |  |               |
|--------------------|------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------|--|---------------|
| Other              | BZ400-USB board        |    | USB board                                            |  | <b>1 248</b>  |
| Termianl Post      | Termianl Post          |    | Termianl Post for ZPAD                               |  | <b>312</b>    |
| Support            | Support                |    | Desk-top support for LX/K Series products (14096)    |  | <b>3 744</b>  |
| Fingerprint Sensor | ZK Optical Sensor      |    | SilkID Fingerprint Sensor                            |  | <b>37 440</b> |
| Fingerprint Sensor | ZK Optical Sensor      |    | ZK fingerprint for new firmware products(ZK2000EMC)  |  | <b>24 960</b> |
| Fingerprint Sensor | ZK Optical Sensor      |   | ZK fingerprint for LX and K Series products (ZK2650) |  | <b>6 240</b>  |
| Fingerprint Sensor | ZK Optical Sensor      |  | ZK fingerprint for MB200 and MB300(ZK2651U)          |  | <b>9 984</b>  |
| Fingerprint Sensor | ZK Optical Sensor      |  | ZK fingerprint data collection sensor(0303EMC_B)     |  | <b>24 960</b> |
| Fingerprint Sensor | ZK Optical Sensor      |  | BioID Fingerprint Sensor                             |  | <b>18 720</b> |
| Fingerprint Sensor | ZK Optical Sensor      |  | ZK FingerPrint for most of T&A Terminal (2750P)      |  | <b>14 976</b> |
| Fingerprint Sensor | Secugen Optical Sensor |  | Secugen Optical Fingerprint Sensor(SDU03P)           |  | <b>49 920</b> |
| Display            | LCD                    |  | Black & White 4 lines Small LCD                      |  | <b>12 480</b> |
| Display            | LCD                    |  | Black & White 4 lines Big LCD                        |  | <b>12 480</b> |
| Display            | LCD                    |  | Black & White 4 lines Small LCD                      |  | <b>12 480</b> |
| Display            | LCD                    |  | Black & White 2 lines Small LCD                      |  | <b>12 480</b> |

|             |                               |                                                                                     |                                                |  |               |
|-------------|-------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------|--|---------------|
| Display     | LCD                           |    | 2.4" TFT Screen                                |  | <b>18 720</b> |
| Display     | LCD                           |    | 2.8" TFT Screen                                |  | <b>18 720</b> |
| Display     | LCD                           |    | 2.8" Touch Screen                              |  | <b>16 224</b> |
| Display     | LCD                           |    | 2.8" for FV350 Serie                           |  | <b>34 944</b> |
| Display     | 3 inches Touch                |   | 3" Touch Screen                                |  | <b>18 720</b> |
| Display     | 3 inches TFT                  |  | 3" TFT Screen                                  |  | <b>24 960</b> |
| Display     | 3 inches Touch and TFT        |  | 3" for VF Series                               |  | <b>43 680</b> |
| Display     | 3.5 inches TFT                |  | 3.5" TFT for iClock Series                     |  | <b>37 440</b> |
| Display     | 4.3 inches TFT                |  | 4.3" TFT for iFace/uFace Series                |  | <b>37 440</b> |
| Display     | 4.3 inches Touch              |  | 4.3" Touch for iFace/uFace Series              |  | <b>12 480</b> |
| Touch Panel | 7inch touch panel(capacitive) |  | 7" touch panel for biopad-CE                   |  | <b>39 936</b> |
| Core Borad  | ZMM228 Core Board             |  | Used for big capacity device, 1G RAM, 1G flash |  | <b>62 400</b> |
| Core Borad  | ZEM500 Core Board             |  | ZK6001 CPU, 4 M Flash, 16M SDRAM               |  | <b>49 920</b> |
| Core Borad  | ZEM500 Core Board             |  | ZK6001 CPU, 8M Flash, 32M SDRAM                |  | <b>56 160</b> |

|            |                             |                                                                                     |                                            |  |               |
|------------|-----------------------------|-------------------------------------------------------------------------------------|--------------------------------------------|--|---------------|
| Core Borad | ZEM510<br>Core Board        |    | ZK6001 CPU,<br>256M Flash, 32M<br>SDRAM    |  | <b>49 920</b> |
| Core Borad | ZEM565<br>Core Board        |    |                                            |  | <b>49 920</b> |
| Core Borad | ZEM600<br>Core Board        |    | Multi-Bio CPU,<br>256M Flash, 64M<br>SDRAM |  | <b>74 880</b> |
| Core Borad | ZEM720(MA300)<br>Core Board |    | Use for MA300/F18/F19                      |  | <b>37 440</b> |
| Core Borad | ZEM800 Core<br>Board        |   | 64M                                        |  | <b>62 400</b> |
| Core Borad | ZEM800 Core<br>Board        |  | 128M                                       |  | <b>74 880</b> |
| Core Borad | ZEM810 Core<br>Board        |  | 64M                                        |  | <b>31 200</b> |
| Core Borad | ZEM810 Core<br>Board        |  | 128M                                       |  | <b>33 696</b> |
| Core Borad | ZMM100<br>Core Board        |  | Use for new firmware<br>device             |  | <b>62 400</b> |
| Core Borad | ZMM200 Core<br>Board        |  | Use for new firmware<br>device, 128M       |  | <b>62 400</b> |
| Core Borad | ZMM210<br>Core Board        |  | Use for new firmware<br>device, 64M        |  | <b>31 200</b> |
| Core Borad | ZMM210<br>Core Board        |  | Use for new firmware<br>device, 128M       |  | <b>37 440</b> |
| Core Borad | ZMM220 Core<br>Board        |  | Use for new firmware<br>device, 64M        |  | <b>31 200</b> |
| Core Borad | ZMM220 Core<br>Board        |  | Use for new firmware<br>device, 128M       |  | <b>37 440</b> |




|            |                        |                                                                                     |                                                                      |  |               |
|------------|------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------|--|---------------|
| Core Borad | ZMM350 Core Board      |    | Use for Android device, 128M                                         |  | <b>62 400</b> |
| Main Board | Main Board             |    | Used for H5/H6/H7/H8/H9                                              |  | <b>24 960</b> |
| Main Board | Main Board (X638)      |    | Used for X628/X638/X628-T/T4/TK100/A7-C/A11-C/B3-C                   |  | <b>24 960</b> |
| Main Board | Main Board (U100)      |    | Used for U160/260/360, US100<br>iClock260/360/460/560/660, UA Series |  | <b>24 960</b> |
| Main Board | Main Board (iClock200) |   | For iClock 480/580/680                                               |  | <b>31 200</b> |
| Main Board | Main Board (iClock700) |  | Used for iClock700                                                   |  | <b>62 400</b> |
| Main Board | Main Board (iClock880) |  | Used for iClock880/iClock880-H                                       |  | <b>34 944</b> |
| Main Board | Main Board (iClock990) |  | Used for iClock990(include ID Card Moudle)                           |  | <b>37 440</b> |
| Main Board | Main Board (U990)      |  | Used for IN01/IN01-A/U990-C                                          |  | <b>24 960</b> |
| Main Board | Main Board             |  | For iClock2000/3000 series                                           |  | <b>99 840</b> |
| Main Board | Main Board             |  | Used for F7/707/708                                                  |  | <b>37 440</b> |
| Main Board | Main Board             |  | Used for SC series/<br>F702-S/F702-MS/FU702-S/F8/F8-T/FU-8           |  | <b>37 440</b> |
| Main Board | Main Board             |  | Used for Biopad100                                                   |  | <b>31 200</b> |
| Main Board | Main Board             |  | Used for S922                                                        |  | <b>37 440</b> |

|            |                  |                                                                                     |                                                 |  |        |
|------------|------------------|-------------------------------------------------------------------------------------|-------------------------------------------------|--|--------|
| Main Board | Main Board       |    | Used for F16                                    |  | 18 720 |
| Main Board | Main Board       |    | Used for MA300-IP65                             |  | 37 440 |
| Main Board | Main Board(US10) |    | Used for US10C                                  |  | 37 440 |
| Main Board | Main Board       |    | Used for US10 With Magnetic stripe cards        |  | 24 960 |
| Main Board | Main Board       |   | Used for X7(ID)                                 |  | 12 480 |
| Main Board | Main Board       |  | Used for LX series(with 2.8 inches TFT Screen)  |  | 22 464 |
| Main Board | Main Board       |  | sed for H3                                      |  | 22 464 |
| Main Board | Main Board       |  | Used for K series (without 2.8 inch TFT Screen) |  | 22 464 |
| Main Board | Main Board       |  | Used for K series (with 2.8 inch TFT Screen)    |  | 34 944 |
| Main Board | Main Board       |  | Used for KF100/KF200                            |  | 22 464 |
| Main Board | Main Board       |  | Used for MB200/MB300                            |  | 22 464 |
| Main Board | Main Board       |                                                                                     | Used for new product MB500 /KF500               |  | 24 960 |
| Main Board | Main Board       |  | Used for Zpad Series                            |  | 31 200 |
| Main Board | Main Board       |  | Used for SF100                                  |  | 39 936 |

|            |            |                                                                                     |                                |  |               |
|------------|------------|-------------------------------------------------------------------------------------|--------------------------------|--|---------------|
| Main Board | Main Board |    | Used for SF200                 |  | <b>18 720</b> |
| Main Board | Main Board |    | Used for SF300                 |  | <b>31 200</b> |
| Main Board | Main Board |    | Used for F16                   |  | <b>18 720</b> |
| Main Board | Main Board |    | Used for TFT1600(ID)           |  | <b>18 720</b> |
| Main Board | Main Board |   | Used for MT100/PT100           |  | <b>31 200</b> |
| Main Board | Main Board |  | Used for<br>MultiBIO700/FAC700 |  | <b>18 720</b> |
| Main Board | Main Board |  | Used for MA500                 |  | <b>18 720</b> |
| Main Board | Main Board |  | Used for SC103/403/503         |  | <b>18 720</b> |
| Main Board | Main Board |  | Used for SCR100                |  | <b>31 200</b> |
| Main Board | Main Board |                                                                                     | Used for SC700/SC700-T         |  | <b>31 200</b> |
| Main Board | Main Board |  | Used for FR1200                |  | <b>31 200</b> |
| Main Board | Main Board |  | Used for F18/F19               |  | <b>18 720</b> |
| PCB Board  | PCB Borad  |                                                                                     | Used for SF300                 |  | <b>14 976</b> |
| PCB Board  | PCB Borad  |                                                                                     | Used for SF200                 |  | <b>14 976</b> |



|              |                              |                                                                                     |                                                                |  |        |
|--------------|------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------|--|--------|
| PCB Board    | Fingerprint Sensor PCB Board |    | 0303EMC_B PCB Board                                            |  | 12 480 |
| PCB Board    | Fingerprint Sensor PCB Board |    | ZK3300_C5515 PCB Board                                         |  | 14 976 |
| PCB Board    | Fingerprint Sensor PCB Board |    | ZK2000EMC PCB Board                                            |  | 12 480 |
| PCB Board    | Interface Board              |                                                                                     | Used for SF200                                                 |  | 14 976 |
| Casing       | Casing                       | Upper Cover<br>Lower Cover                                                          | Plastic Casing for White & Black LCD, 3"TFT, and 3.5" products |  | 3 744  |
| Casing       | Casing                       | Upper Cover<br>Lower Cover                                                          | Plastic Casing for 4.3" TFT Products                           |  | 4 992  |
| Casing       | Casing                       | Upper Cover<br>Lower Cover                                                          | Plastic Casing for 8" TFT Products                             |  | 7 488  |
| Casing       | Casing                       | Upper Cover<br>Lower Cover                                                          | Metallic Casing for F702 series                                |  | 18 720 |
| Casing       | Casing                       | Upper Cover<br>Lower Cover                                                          | Plastic Casing for Biopad100                                   |  | 3 744  |
| Keypad Board | Keypad PCB Board             |  | Keypad PCB Board                                               |  | 6 240  |
| Keypad Board | Keypad PCB Board             |  | Keypad PCB Board for S922                                      |  | 9 984  |
| Keypad Board | MultiBio 700 TFT Back Board  |  | Back Board for MultiBio 700                                    |  | 6 240  |
| Light Board  | Light Board                  |  | Board for light                                                |  | 624    |
| Keypad Board | Keypad Buttons               |  | Plastic Keypad Buttons                                         |  | 1 248  |

|        |                                  |                                                                                     |                                           |                                                  |         |
|--------|----------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------|--------------------------------------------------|---------|
| Module | ZEM10 Fingerprint Module         |    |                                           |                                                  | 31 200  |
| Module | ID card Module and Antenna       |    | 125 KHz ID Card Reader                    |                                                  | 7 114   |
| Module | Mifare card Module and Antenna   |    | 13.56 MHz Mifare One Card Reader          |                                                  | 16 224  |
| Module | HID Proximity Module and Antenna |    |                                           |                                                  | 62 400  |
| Module | HID Proximity Module and Antenna |   | iClass                                    |                                                  | 124 800 |
| Module | WiFi Module                      |  | USB Wi-Fi Module                          | iClock/U/S/X series<br>IN01/02                   | 12 480  |
| Module | WiFi Module                      |  | Wi-Fi Module IC                           | uFace/SpeedFace/FaceDepot/Palm series, IN05, F22 | 6 240   |
| Module | WiFi Module                      |  | Wi-Fi Module IC                           | D / WL series                                    | 6 240   |
| Module | 3G Module                        |  | HUAWEI (MU709s-6)                         |                                                  | 49 920  |
| Module | Antenna                          |  | Antenna for GPRS Module                   |                                                  | 1 248   |
| Module | Antenna                          |  | Antenna for WiFi Module                   |                                                  | 1 248   |
| Module | Antenna                          |  | Antenna for 3G Module                     |                                                  | 1 248   |
| Module | Camera Module                    |  | For fingerprint device like iClock series |                                                  | 24 960  |
| Module | Camera Module                    |  | Camera module for MultiBio 700            |                                                  | 49 920  |

|                     |                                |                                                                                     |                                                                         |  |               |
|---------------------|--------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------|--|---------------|
| Module              | Camera Module                  |    | For Face device like<br>KF100/200, MB200/300                            |  | <b>12 480</b> |
| Flexible Flat Cable | RS485 Serial Port              |    | RS485 Communication<br>for<br>fingerprint product & PC                  |  | <b>12 480</b> |
| Flexible Flat Cable | RS485 Convertor                |    | PC Port Converter when<br>applying RS485<br>Communication               |  | <b>37 440</b> |
| Flexible Flat Cable | RS232<br>Communication<br>Line |    | COM port for fingerprint<br>product & PC                                |  | <b>3 744</b>  |
| Flexible Flat Cable | Modem<br>Communication line    |   | Connection Line for<br>fingerprint<br>product & Modem                   |  | <b>3 744</b>  |
| Flexible Flat Cable | Printer                        |  | Use for LP400                                                           |  | <b>31 200</b> |
| Flexible Flat Cable | Printer<br>Communication line  |  | Connection line for<br>fingerprint<br>product & printer                 |  | <b>3 744</b>  |
| Flexible Flat Cable | FFC Line                       |  | Lines in the machines                                                   |  | <b>250</b>    |
| Flexible Flat Cable | FFC Line                       |  | Lines in the machines,<br>with new GPRS, 3G<br>main borad               |  | <b>1 248</b>  |
| Flexible Flat Cable | two plug wires                 |  | Lines in the machines                                                   |  | <b>250</b>    |
| Light               | LED                            |  | LED Indicator for Single-<br>Color,<br>Double-Color, or Three-<br>Color |  | <b>374</b>    |
| Light               | Lamp                           |  | Lamps for iFace<br>KF100/200, MB200/300<br>Series                       |  | <b>3 120</b>  |
| Light               | Lamp                           |  | Lamps for uFace<br>Series.4.3" Touch<br>Screen                          |  | <b>6 240</b>  |
| Light               | Lamp                           |  | Lamps for VF Series                                                     |  | <b>6 240</b>  |



|              |                  |                                                                                     |                                               |  |        |
|--------------|------------------|-------------------------------------------------------------------------------------|-----------------------------------------------|--|--------|
| Line         | Access control   |    | Line for Access Control,<br>1P to 5P          |  | 624    |
| Line         | Line             |    | Line for Access Control,<br>6P to 13P         |  | 624    |
| USB Cable    | USB Cable        |    | Mini USB Cable                                |  | 998    |
| USB Cable    | USB Cable        |    | USB Cable for Time<br>Attendance device(1.5M) |  | 1 872  |
| Line         | Network Line     |   | 1.5M Network Parallel<br>Line                 |  | 1 872  |
| Line         | Network Line     |  | 8P connector to Network                       |  | 874    |
| Line         | AC Adapter Line  |  |                                               |  | 1 248  |
| Screws       | Screws           |  | Screws for Install                            |  | 125    |
| Rubber Caps  | Rubber Caps      |  | for Screws holders                            |  | 125    |
| Screw Driver | Screw Driver     |  | Star-shape Screw Driver                       |  | 250    |
| Interface    | Interface        |  | Entrance guard terminal                       |  | 374    |
| AC Adapter   | ZK-POE(5V)       |  | POE Converter, 5V                             |  | 12 480 |
| AC Adapter   | ZK-POE(12V)      |  | POE Converter, 12V                            |  | 24 960 |
| AC Adapter   | Internal Battery |  | Back-up Battery                               |  | 18 720 |

|            |                           |                                                                                     |                                                                               |  |        |
|------------|---------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|--|--------|
| AC Adapter | Mini UPS(5V/12V)          |    | AC Adapter in case of current-cut                                             |  | 12 480 |
| AC Adapter | CR1220 Battery            |    |                                                                               |  | 1 248  |
| AC Adapter | Battery                   |    | Used for H3                                                                   |  | 12 480 |
| AC Adapter | Battery                   |                                                                                     | Used for K20/30/40                                                            |  | 9 984  |
| AC Adapter | Internal Battery For S922 |   | Back-up Battery for S922                                                      |  | 43 680 |
| AC Adapter | 5V/12V DC AC Adapter      |  | 5V 2A or 12V 1.5A for Fingerprint Device                                      |  | 6 240  |
| AC Adapter | 12V DC AC Adapter         |  | Directly supply 12V 3A AC Adapter to the fingerprint machine                  |  | 9 984  |
| AC Adapter | U.K. Plug                 |  | Only one type                                                                 |  | 624    |
| AC Adapter | U.S.A. Plug               |  | Only one type                                                                 |  | 624    |
| Others     | MCU                       |  | Micro controller unit                                                         |  | 6 240  |
| Others     | Speaker                   |  | Voice Prompt Speaker for Device                                               |  | 2 496  |
| Others     | Wireless Doorbell         |  | No need of place lines & excavate holes in wall, you can use after installing |  | 12 480 |
| Others     | SD Card                   |  | 2G SD Card                                                                    |  | 12 480 |
| Others     | labels                    |  | Use for all Products                                                          |  | 37     |

|                             |                                              |                                                                                     |                                                                     |  |        |
|-----------------------------|----------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------|--|--------|
| Others                      | Thermal Printing Paper (57*50)               |    | Printing paper use for LP400                                        |  | 624    |
| Mounting Plate              | Mounting Plate                               |    | Metallic or Plastic Mount Plate for All of Time Attendance Products |  | 3 744  |
| Mounting Plate              | Mounting Plate                               |    | Metallic Mount Plate for All of Access Control Products             |  | 3 744  |
| Protection Cover for device | TABox 01 (Old Name: Z618U100)                |    | Metallic Cover for X618, X628, X638, U160, iclock360                |  | 18 720 |
| Protection Cover for device | TABox 02 (Old Name: ZU260)                   |   | Metallic Cover for U260, iClock260                                  |  | 18 720 |
| Protection Cover for device | Acbox01 (Old Name: MF7)                      |  | Metallic Cover for F7, F708                                         |  | 18 720 |
| Protection Cover for device | Acbox03 (Old Name: MF2)                      |  | Metallic Cover for F703-S, F702-S                                   |  | 18 720 |
| Protection Cover for device | Acbox02 (Old Name: ZF8)                      |  | Metallic Cover for F8                                               |  | 18 720 |
| Protection Cover for device | TABox 03 (Old Name: uFace302 Metallic Cover) |  | Metallic Cover for uFace302                                         |  | 31 200 |
| Protection Cover for device | TABox 28                                     |  | Metallic Cover for SFace900                                         |  | 31 200 |
| Protection Cover for device | X628 Acrylic Cover                           |  | Plastic Cover for X628                                              |  | 12 480 |
| Protection Cover for device | TABox 10 (Old Naem: UA200 Acrylic Cover)     |                                                                                     | Plastic Cover for UA200                                             |  | 12 480 |
| Protection Cover for device | TABox 09 (Old Name: UA100 Acrylic Cover)     |                                                                                     | Plastic Cover for UA100                                             |  | 12 480 |
| Protection Cover for device | TABox 07 (Old Name: IN01-A Acrylic Cover)    |                                                                                     | Plastic Cover for IN01-A                                            |  | 12 480 |



|                                |                                                                          |  |                                                               |  |        |
|--------------------------------|--------------------------------------------------------------------------|--|---------------------------------------------------------------|--|--------|
| Protection Cover<br>for device | T4 Acrylic Cover                                                         |  | Plastic Cover for T4                                          |  | 12 480 |
| Protection Cover<br>for device | IN01 Metallic Cover                                                      |  | Metallic Cover for IN01-A.IN01                                |  | 18 720 |
| Protection Cover<br>for device | TABox 13<br>(Old Name: VF700<br>Metallic Cover)                          |  | Metallic Cover for VF700                                      |  | 24 960 |
| Protection Cover<br>for device | TABox 14<br>(Old Name:<br>Biopad100 Metallic<br>Cover)                   |  | Metallic Cover for<br>Biopad100                               |  | 18 720 |
| Protection Cover<br>for device | TABox 16<br>(Old Name:<br>iClock660 Metallic<br>Cover (Water-<br>proof)) |  | Metallic Cover for<br>iClock660                               |  | 31 200 |
| Protection Cover<br>for device | TABox 17<br>(Old Name:<br>uFace302 Acrylic<br>Cover)                     |  | Plastic Cover for<br>uFace302                                 |  | 18 720 |
| Protection Cover<br>for device | TABox 18<br>(Old Name:<br>Biopad100 Acrylic<br>Cover)                    |  | Plastic Cover for<br>Biopad100                                |  | 14 976 |
| Protection Cover<br>for device | TABox 15<br>(Old Name:<br>iClock660 Metallic<br>Cover)                   |  | Metallic Cover for<br>iClock660                               |  | 18 720 |
| Protection Cover<br>for device | TABox 19<br>(Old Name:<br>iClock680 Acrylic<br>Cover)                    |  | Plastic Cover for<br>iClock680                                |  | 12 480 |
| Protection Cover<br>for device | TABox 04                                                                 |  | Metallic Cover for IN04                                       |  | 18 720 |
| Protection Cover<br>for device | TABox 05                                                                 |  | Metallic Cover<br>foriClock360(have<br>keypad hold for F1-F8) |  | 18 720 |
| Protection Cover<br>for device | TABox 06                                                                 |  | Plastic Cover for T5                                          |  | 12 480 |
| Protection Cover<br>for device | TABox 08                                                                 |  | Plastic Cover for<br>iClock880                                |  | 12 480 |
| Protection Cover<br>for device | TABox 11                                                                 |  | Plastic Cover for K14                                         |  | 12 480 |

|                                |          |                                                                                    |                                        |  |               |
|--------------------------------|----------|------------------------------------------------------------------------------------|----------------------------------------|--|---------------|
| Protection Cover<br>for device | TABox 12 |                                                                                    | Plastic Cover for<br>iclock680         |  | <b>12 480</b> |
| Protection Cover<br>for device | TABox 20 |                                                                                    | Metallic Cover for IN01                |  | <b>18 720</b> |
| Protection Cover<br>for device | Acbox04  |                                                                                    | Plastic Cover for CS700                |  | <b>12 480</b> |
| T&A Accessory                  | TABox 24 |   | Metallic Cover for G3                  |  | <b>31 200</b> |
| T&A Accessory                  | TABox 25 |  | Metallic Cover for<br>uFace402/602/800 |  | <b>31 200</b> |

Прайс-лист на терминалы для контроля доступа

| Тип 1             | Тип 2                     | Тип 3              | Модель              | Фото                                                                                | Параметры                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Цена розница |
|-------------------|---------------------------|--------------------|---------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| Standalone Device | RFID                      | 2.4" Color Display | PA22                |    | 2.4 inch TFT display<br>Palm Capacity: 1,000 (1 : N)<br>ID Card Capacity: 5,000<br>Record Capacity: 50, 000<br>Communication: Wi-Fi(optional 6240 тг), TCP/IP, USB host, RS485, Wiegand<br>Standard Functions: ID card, TCP/IP, USB Host, T9 input, Require Query, 14 Digit User ID, Lock, Door sensor, Alarm, Exitbutton, AUX input, Tamper switch, Touch Keypad, Live palm detection<br>Protocol & Software: AC push, ZKBio Access IVS<br>Optional: IC card, Wi-Fi                                                                                                                                                                                                                                                                     | 99 840       |
| Standalone Device | RFID                      | 2.4" Color Display | SC800               |  | RFID Identification<br>card Capacity: 50,000(Optional:100,000)<br>Log Capacity: 200, 000<br>Communication: TCP / IP, Wiegand, RS485, OSDP (Ver2.1.7), RS232 (only for printer), Wi-Fi (Optional +6240 тг)<br>Standard Module: ID<br>Optional Multi-tech Module:IC/Felica/ IC & ID / ID & IC & HID Proxy & HID iClass<br>Access Control Interface for electric lock, door sensor, alarm, exit button and door bell.<br>Wiegand input&output                                                                                                                                                                                                                                                                                               | 81 120       |
| Standalone Device | RFID                      | 2.4" Color Display | SC105(64M)          |  | RFID Identification<br>ID card Capacity: 30, 000<br>Log Capacity: 80, 000<br>Communication: TCP/IP, RS232/485, USB Host<br>Access Control Interface for electric lock, door sensor, alarm, exit button and door bell.<br>Wiegand input&output<br>1 ea Aux. input for linkage function<br>Optional A&C push Standard T&A Push                                                                                                                                                                                                                                                                                                                                                                                                             | 68 640       |
| Standalone Device | RFID                      | 2.4" Color Display | SC405(64M)          |  | RFID Identification<br>ID card Capacity: 30, 000<br>Log Capacity: 80, 000<br>Communication: TCP/IP, RS232/485, USB Host<br>Access Control Interface for electric lock, door sensor, alarm, exit button and door bell.<br>Wiegand input&output<br>1 ea Aux. input for linkage function<br>Optional A&C push Standard T&A Push                                                                                                                                                                                                                                                                                                                                                                                                             | 68 640       |
| Standalone Device | RFID                      | 2.8" Color Display | SC700(ZMM220)       |  | PULL SDK firmware,Optional :TA push<br>2.8" TFT Color Display and Touch Screen<br>RFID Identification<br>card Capacity: 30, 000;50,000(Optional)<br>Log Capacity: 100, 000;500,000(Optional)<br>Communication: TCP/IP, USB Host<br>Access Control Interface for electric lock, door sensor, alarm, exit button.                                                                                                                                                                                                                                                                                                                                                                                                                          | 74 880       |
| Standalone Device | Visible Light Face Device | 2.4" Touch Screen  | SpeedFace-V3L(Lite) |  | Display: 2.4-inch touch Screen<br>Face Capacity: 500 (Optional: 1,500)<br>RFID Capacity(Optional): 3,000(Optional: 10,000)<br>Transaction Capacity: 200,000<br>Memory: 256MB RAM / 512MB ROM<br>Communication: TCP/IP,WiFi(Optional)<br>Standard Functions : ID Card, Wired doorbell, ADMS, Https, DST, 14-digit User ID, Record Query, Tamper Switch Alarm, Schedule Bell(TA push), T9 Input, Webserver, Multiple Verification Methods<br>Simple Access Control: 3rd Party Electric Lock, Door Sensor, Exit Button<br>Optional Functions : WIFI (6240 тг), MF (14976 тг)<br>Power Adapter(Optional): 12V/1.5A 6240 тг<br>SDK: AC PUSH(Standard), Support convert to TA PUSH<br>Ingress Protection Rating: IP65<br>Software: ZKBioAccess | 83 616       |



|                   |                           |                   |                                                                                                                                                                                     |                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |        |
|-------------------|---------------------------|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| Standalone Device | Visible Light Face Device | 2.4" Touch Screen | SpeedFace-V3L                                                                                                                                                                       |     | Display: 2.4" LCD Color Touch Screen<br>Face Capacity:500(Optional: 1,500)<br>FingerPrint Capacity:3,000<br>RFID Capacity(Optional):3,000<br>Transaction Capacity: 200, 000 Transactions<br>Memory: 256MB RAM / 512MB Flash<br>Communication: RS485, TCP/IP<br>AC Adapter: 12V DC, 3A<br>Operating Temperature: -5°C- 45 °C<br>Operating Humidity: 10%-90% RH<br>Standard Functions : Advance access<br>controll, Lock, Sensor, Alarm, Exit Button, Aux Input<br>Optional : WIFI (6240 tr) , MF (14976 tr) ,ID(6240 tr)<br>Power Adapter Optional 6240 tr<br>SDK: AI PUSH SDK<br>Software: ZKBioAccess | 99 840 |
| Standalone Device | Visible Light Face Device | 2.4" Touch Screen | SpeedFace-V3L[QR]                                                                                                                                                                   |     | Display: 2.4" LCD Color Touch Screen<br>Face Capacity:500(1:N)<br>RFID Capacity(Optional):3,000<br>Transaction Capacity: 200, 000 Transactions<br>Memory: 256MB RAM / 512MB Flash<br>Communication: RS485, TCP/IP<br>AC Adapter: 12V DC, 3A<br>Operating Temperature: -5°C- 45 °C<br>Operating Humidity: 10%-90% RH<br>Standard Functions : Advance access<br>controll, Lock, Sensor, Alarm, Exit Button, Aux Input<br>Optional : WIFI (6240 tr) , MF (14976 tr) ,ID(6240 tr)<br>Power Adapter Optional<br>SDK: AI PUSH SDK<br>Software: ZKBioAccess                                                   | 99 840 |
| Standalone Device | Visible Light Face Device | 2.4" Touch Screen | SpeedFace-V3L[RFID]                                                                                                                                                                 |   | Display: 2.4" LCD Color Touch Screen<br>Face Capacity:500(1:N)<br>RFID Capacity(Optional):3,000<br>Transaction Capacity: 200, 000 Transactions<br>Memory: 256MB RAM / 512MB Flash<br>Communication: RS485, TCP/IP<br>AC Adapter: 12V DC, 3A<br>Operating Temperature: -5°C- 45 °C<br>Operating Humidity: 10%-90% RH<br>Standard Functions : Advance access<br>controll, Lock, Sensor, Alarm, Exit Button, Aux Input<br>Optional : WIFI (6240 tr) , MF (8736 tr)<br>Power Adapter Optional<br>SDK: AI PUSH SDK<br>Software: ZKBioAccess                                                                 | 93 600 |
| Reader            | Face Reader               | None              | KF1100                                                                                                                                                                              |   | Wall Mount :Compatible with Asian gang-box<br>Visible light facial<br>TCP/IP, Wiegand /RS485<br>Push SDK connect to ZKBioAccess<br>Wiegand connect to inBio<br>Card Capacity:30,000(ID standard,IC Optional:6240 tr)<br>Face Capacity:1,500<br>Logs Capacity:100,000<br>WIFI:Optional 6240 tr<br>Web Server<br>Operating Temperature:-10°C to 50°C ( 14°F to 122°F)                                                                                                                                                                                                                                    | 68 640 |
| Reader            | Face Reader               | None              | KF1200                                                                                                                                                                              |   | Wall Mount :Compatible with Single gang-box<br>Visible light facial<br>TCP/IP, Wiegand /RS485<br>Push SDK connect to ZKBioAccess<br>Wiegand connect to inBio<br>Card Capacity:30,000(ID standard,IC Optional 6240 tr)<br>Face Capacity:1,500<br>Logs Capacity:100,000<br>WIFI:Optional 6240 tr<br>Web Server<br>Operating Temperature:-10°C to 50°C ( 14°F to 122°F)<br>Dimensions (W*H*D):121*80*13.8 mm                                                                                                                                                                                              | 68 640 |
| Extension Board   | none                      | none              | wall mount<br>:Compatible with<br>Single gang-box<br>Visible light facial<br>TCP/IP, Wiegand<br>/RS485<br>Push SDK connect to<br>ZKBioAccess<br>Wiegand connect to<br>inBio<br>Card |  | Aux input: 8<br>Aux Output Relay: 8<br>Communication: RS485 and OSDP<br>Baud Rate for RS-485/OSDP: 9600 bps<br>RS485/OSDP address: Set by DIP switch<br>Dimension (LxH): 6.29 in. x 4.17 in.<br>Net Weight: 0.44 lbs.<br>Consumption: 3.6W @ 12V DC 300mA<br>AC Adapter: 12V DC 300mA<br>Operating Temperature: 32-113F<br>Operating Humidity: 20% to 80%                                                                                                                                                                                                                                              | 87 360 |





|                   |                                     |                  |                    |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                |
|-------------------|-------------------------------------|------------------|--------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Standalone Device | Visible Light Face/Palm/Card Device | 5 inch Touch TFT | SpeedFace-V5L-RFID |    | <p>Visible Light Face/Card/Palm Terminal</p> <p>Face Capacity: 6,000(1:N) (Optional:10,000 12480 tr~24960 tr)</p> <p>Palm Capacity: 3,000(1:N)</p> <p>Card Capacity:10,000 (ID Standard)</p> <p>Transaction Capacity: 200, 000</p> <p>Memory: 512M RAM / 8G ROM</p> <p>Communication: TCP/IP, WIFI(Optional), RS485</p> <p>Standard Functions : ADMS, T9 Input, DST, Camera, 9 Digit user ID, Record Query, Holiday, Access Levels, Groups, Anti-Passback, Holidays, Tamper Switch Alarm, Multiple Verify Mode</p> <p>Access Control Interface: Lock, Sensor, Alarm, Exit Button, Aux Input/Output</p> <p>Optional : WIFI (6240 tr) /MF(12480 tr)</p> <p>ZKTeco Logo Standard</p> <p>Blank Logo Optional</p>                                                                                                                                                                | <b>187 200</b> |
| Standalone Device | Visible Light Face Device           | 5inch Touch TFT  | SpeedFace M1       |    | <p>Display: 5" LCD Color Touch Screen</p> <p>Face Capacity: 6,000(1:N)(Optional:10,000 12480 tr~24960 tr)</p> <p>Palm Capacity: 3,000</p> <p>Card Capacity: 10,000</p> <p>Transaction Capacity: 200, 000</p> <p>Memory: 512M RAM / 8G ROM</p> <p>Communication: TCP/IP, WIFI(Optional), RS485, Wiegand input/output</p> <p>AC Adapter: 12V DC, 3A</p> <p>Operating Temperature: 0 °C- 45 °C</p> <p>Operating Humidity: 20%-80%</p> <p>Standard Functions : ID Card ,ADMS, T9 Input, DST, Camera, 9-digit User ID, Access Levels, Groups, Anti-passback, Record Query, Tamper Switch, Alarm, Multiple Verify Modes</p> <p>Access Control Interface: 3rd Party Electric Lock, Door Sensor,Exit Button, Alarm output, Auxiliary Input</p> <p>Optional : WIFI (6240 tr) , IC Card (14976 tr)</p> <p>SDK: Access Control PUSH SDK</p> <p>Software: ZKBioAccess/ZKBioSecurity</p> | <b>187 200</b> |
| Standalone Device | Visible Light Face Device           | 5inch Touch TFT  | SpeedFace M2       |  | <p>Display: 5" LCD Color Touch Screen</p> <p>Face Capacity: 6,000(1:N)(Optional:10,000 12480 tr~24960 tr)</p> <p>Palm Capacity: 3,000</p> <p>Card Capacity: 10,000</p> <p>Transaction Capacity: 200, 000</p> <p>Memory: 512M RAM / 8G ROM</p> <p>Communication: TCP/IP, WIFI(Optional), RS485, Wiegand input/output</p> <p>AC Adapter: 12V DC, 3A</p> <p>Operating Temperature: 0 °C- 45 °C</p> <p>Operating Humidity: 20%-80%</p> <p>Standard Functions : ID Card ,ADMS, T9 Input, DST, Camera, 9-digit User ID, Access Levels, Groups, Anti-passback, Record Query, Tamper Switch, Alarm, Multiple</p>                                                                                                                                                                                                                                                                    | <b>187 200</b> |
| Standalone Device | Visible Light Face Device           | 5inch Touch TFT  | SpeedFace M3       |  | <p>Face Capacity: 6,000(1:N)(Optional 30,000 12480 tr~37440 tr)</p> <p>Card Capacity: 10,000(Optional 30,000)</p> <p>Palm : N/A</p> <p>Waterproof : IP65</p> <p>Transaction Capacity: 1,000, 000</p> <p>Memory: 512M RAM / 8G ROM</p> <p>Communication: TCP/IP, WIFI, RS485,RS232, Wiegand input/output</p> <p>AC Adapter: 12V DC, 3A</p> <p>Operating Temperature: -10°C ~ 45°C</p> <p>Operating Humidity: 10% ~ 90%</p> <p>Standard Functions : ID Card, ADMS, T9 Input, DST, Camera, 9-digit User ID, Access Levels, Groups, Holidays, Anti-passback, Record Query, Tamper Switch Alarm, Multiple Verification Methods, External Print</p> <p>Access Control Interface:3rd-party Electric Lock, Door</p>                                                                                                                                                                 | <b>205 920</b> |
| Standalone Device | Visible Light Face Device           | 5inch Touch TFT  | SpeedFace M4       |  | <p>Display:5" Touch Screen</p> <p>Face Capacity:6,000(Optional:10,000 12480 tr~24960 tr)</p> <p>Palm Capacity:3,000</p> <p>User Capacity: 10,000</p> <p>Transaction Capacity: 200,000(Optional:500,000)</p> <p>Memory: 1GB RAM / 8GB Flash</p> <p>Communication: TCP/IP, Wiegand Input / Output, Wi-Fi(Optional), RS485</p> <p>Power Supply: DC 12V 3A</p> <p>Operating Temperature: -30°C to 60°C</p> <p>Operating Humidity:10% to 90%</p> <p>Standard Functions: ID Card, ADMS, DNS, T9 Input, DST, Camera, 9-digit User ID, Advance Access Control, Groups, Holidays, Anti-passback, Record Query, Tamper Switch Alarm, Bell Scheduling</p> <p>Optional Function:IC / HID / iClass / Felica / Desfire EV1 / EV2/ Legic, POE</p> <p>Access Control Interface: 3rd-party Electric Lock, Door Sensor, Exit Button, Alarm Output, Aux. Input</p> <p>SDK: AC PUSH SDK</p>     | <b>212 160</b> |



|                   |                           |                       |                   |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |         |
|-------------------|---------------------------|-----------------------|-------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Standalone Device | Visible Light Face Device | 5inch Touch TFT       | SpeedFace-H5L     |    | Display: 5" LCD Color Touch Screen<br>Face Capacity: 6,000(1:N)(Optional:10,000 12480 tr~24960 tr)<br>FingerPrint Capacity:6,000(10,000 optional)<br>Card Capacity (ID standard) : 10,000<br>Transaction Capacity: 200, 000<br>Memory: 512M RAM / 8G ROM<br>Communication: TCP/IP, WIFI(Optional), RS485<br>AC Adapter: 12V DC, 3A<br>Operating Temperature: 0 °C- 45 °C<br>Operating Humidity: 10%-90%<br>Standard Functions : ID,ADMS, T9 Input, DST, Camera, 9 Digit user ID, Record Query, Holiday, Access Levels, Groups, Anti-Passback, Holidays, Tamper Switch Alarm, Multiple Verify Mode<br>Access Control Interface: Lock, Sensor, Alarm, Exit Button, Aux Input/Output<br>Optional : WIFI (6240 tr), MF (14976 tr)<br>SDK: Access Control, PUSH SDK | 212 160 |
| Standalone Device | Visible Light Face Device | 7" Color Touch Screen | FaceDepot-7B      |    | Display: 7" LCD Color Touch Screen<br>Face Capacity: 10,000(1:N)<br>FingerPrint Capacity(Optional):10,000<br>RFID Capacity(Optional):10,000<br>Transaction Capacity: 200, 000 Transactions<br>Memory: 2G RAM / 16G ROM<br>Communication: RS485, RS232, TCP/IP<br>AC Adapter: 12V DC, 3A<br>Operating Temperature: 0 °C- 45 °C<br>Operating Humidity: 10%-90%<br>Standard Functions : Advance access                                                                                                                                                                                                                                                                                                                                                            | 349 440 |
| Standalone Device | Visible Light Face Device | 7" Color Touch Screen | FaceDepot-7B(CH)  |   | based on FaceDepot-7B<br>Barrier/stand installation<br>Software: ZKBioAccess,ZKBioSecurity                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 374 400 |
| Standalone Device | Visible Light Face Device | 7" Color Touch Screen | FaceDepot-7B(WP)  |  | Base on FaceDepot-7B(CH), <b>IP65 waterproof version</b><br>Including barrier bracket                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 386 880 |
| Standalone Device | Visible Light Face Device | 7" Color Touch Screen | FaceDepot-7BL     |  | Display: 7" LCD Color Touch Screen<br>Face Capacity: 10,000(1:N) (Optional:100,000 24960 tr~49920 tr)<br>FingerPrint Capacity(Optional):10,000<br>RFID Capacity(Optional):10,000<br>Transaction Capacity: 200, 000 Transactions<br>Memory: 512MB RAM / 8G Flash;<br>Communication:TCP/IP WiFi (Optional), Wiegand input / output, RS485<br>AC Adapter: 12V DC, 3A<br>Operating Temperature: 0 °C- 45 °C<br>Operating Humidity: 20%-80%<br>Standard Functions : Advance access controll, Lock, Sensor, Alarm, Exit Button, Aux Input<br>Optional : WIFI (6240 tr) , MF, EM, FingerPrint<br>SDK: PUSH SDK<br>Wall mounting installation<br>Software: ZKBioAccess, ZKBioSecurity                                                                                  | 249 600 |
| Standalone Device | Visible Light Face Device | 7" Color Touch Screen | FaceDepot-7BL(CH) |  | Based on FaceDepot-7BL<br>Barrier/stand installation<br>Software: ZKBioAccess,ZKBioSecurity<br>L:linux System                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 274 560 |
| Standalone Device | Visible Light Face Device | 7" Color Touch Screen | FaceDepot-7BL(WP) |  | Base on FaceDepot-7BL(CH), <b>IP65 waterproof version</b><br>Including barrier bracket<br>L:linux System                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 287 040 |

|                           |                                 |                           |                |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |         |
|---------------------------|---------------------------------|---------------------------|----------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Visible Light Face Device | AC                              | 7" Touch Screen           | RevFace15      |    | Display:7" Touch Screen<br>Face Capacity: 10,000 (Optional:20,000 24960 tr~37440 tr)<br>User/Card Capacity: 10,000 (Optional:20,000)<br>Transaction Capacity: 200, 000<br>Memory: 1GB RAM / 8GB Flash<br>Communication: TCP/IP, Wiegand Input / Output, Wi-Fi, RS485 / RS232<br>Power Supply: DC 12V 3A<br>Operating Temperature: -20°C- 45 °C<br>Operating Humidity: 0%-90%<br>Standard Functions: WebServer, ADMS, T9 Input, DST, Camera, 9-digit User ID, Access Levels, Groups, Holidays, Anti-passback, Record Query, Tamper Switch Alarm<br>Access Control Interface: 3rd-Party Electric Lock, Door Sensor, Exit Button, Alarm output, Auxiliary Input<br>Specia Functions:IP65 / Multi-face Verification / Mask Detection<br>SDK: AC PUSH SDK<br>Software: ZKBioAccess IVS<br>ZK Logo Standard | 274 560 |
| Standalone Device         | Face A&C Device                 | 2.8-inch TFT              | MultiBio 800-H |   | Display: 2.8 inch TFT LCD Color Screen (keypad)<br>Face Capacity: 1500(1:N) 4000(1:1)<br>Fingerprint Capacity: 4000 Templates<br>Card Capacity: 10, 000(Optional) ID/Mifare or HID card(+49920 tr)<br>Transaction Capacity: 100, 000 Transactions<br>Algorithm Version: ZKFinger VX10.0 & ZKFace VX7.0<br>Communication: RS485, TCP/IP, USB-host<br>Access Control Interface: 3rd Party Electric Lock, Door                                                                                                                                                                                                                                                                                                                                                                                           | 156 000 |
| Standalone Device         | Face A&C Device                 | 2.8-inch TFT              | MultiBio 800   |  | Display: 2.8 inch TFT LCD Color Screen (keypad)<br>Face Capacity: 400 Face<br>Fingerprint Capacity:1000 Templates<br>Transaction Capacity: 100, 000 Transactions<br>Algorithm Version: ZKFinger VX10.0 & ZKFace VX7.0<br>Communication: RS485, TCP/IP, USB-host<br>Access Control Interface: 3rd Party Electric Lock, Door Sensor, Exit Button, Alarm, Doorbell, Wiegand In/Out<br>Aux. Input:1ea for linkage function                                                                                                                                                                                                                                                                                                                                                                                | 137 280 |
| Standalone Device         | Multi-Biometric                 | 2.8" Color Display        | MultiBIO 600   |  | Display: 2.8 inch TFT LCD Color Screen (keypad)<br>Face Capacity: 800 Face<br>Fingerprint Capacity:3000 Templates<br>Transaction Capacity: 100, 000 Transactions<br>Communication: TCP/IP, USB-host, Wi-Fi<br>Access Control Interface: 3rd Party Electric Lock, Door Sensor, Exit Button<br>Standard Function: DST, Self-Service Query, Photo ID, Scheduled-bell, T9 Input, Multiple Verification Modes                                                                                                                                                                                                                                                                                                                                                                                              | 87 360  |
| Standalone Device         | Palm & Fingerptint TA&AC Device | 2.4" Color Display        | PA10           |  | <b>Fingerprint Capacity: 3,000</b><br><b>Palm: 800</b><br><b>Card Capacity(Optional): 3,000</b><br><b>Record Capacity: 150,000</b><br><b>Communication: TCP/IP, USB host, RS485, WIFI(Optional)</b><br><b>Standard Functions: BioID, DST, Require Query, Automatic Status Switch, Schedule-bell, T9 Input, Advance access control function, Anti-passback, External RS485 fingerprint reader , Touch Keypad</b>                                                                                                                                                                                                                                                                                                                                                                                       | 143 520 |
| Access Control Products   | Fingerpirnt A&C Device          | 2.8" touch screen         | BR1200[FBE]    |  | 2.8-inch touch screen<br>Fingerprint Capacity: 10,000 (50,000 optional)<br>User & Card & Barcode Capacity: 10,000 (50,000 optional)<br>Log Capacity: 150, 000<br>Communication:TCP/IP, RS232<br>Access Control: 2ch relays<br>Standard Functions: Self-service Query, DST, T9 Input, 9 Digital User ID, ADMS, DNS<br>Software: ZKBioSecurity, Access push SDK                                                                                                                                                                                                                                                                                                                                                                                                                                         | 218 400 |
| Access Control Products   | Palm A&C Device                 | 2.8" touch screen         | BR1200[PBE]    |  | 2.8-inch touch screen<br>Palm Capacity: 1,000<br>User & Card Capacity: 10,000 (50,000 optional)<br>Log Capacity: 150, 000<br>Communication:TCP/IP, RS232<br>Access Control: 2ch relays<br>Standard Functions: Self-service Query, DST, T9 Input, 9 Digital User ID, ADMS, DNS<br>Software: ZKBioSecurity, Access push SDK                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 218 400 |
| Access Control Products   | Fingerprint A&C Device          | 2.4-inch TFT color screen | F21 Lite       |  | 2.4-inch TFT color screen, keypad, 3000FP, 100000 record, ZMM220 coreboard<br>BioID fingerprint reader<br>Multiple Verification Modes: Multi-verification methods (card is optional) providing user various choices<br>Full Access Control Features: Anti-passback, access control interface for 3rd party electric lock, door sensor, exit button, alarm and doorbell<br>photo ID (optional)                                                                                                                                                                                                                                                                                                                                                                                                         | 124 800 |



|                                |                          |                           |             |                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                |
|--------------------------------|--------------------------|---------------------------|-------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Access Control Products        | Fingerprint A&C Device   | 2.4-inch TFT color screen | F21         |     | 2.4-inch TFT color screen, keypad, 3000FP, 100000 record, ZMM220 coreboard<br>SilkID fingerprint reader with living object detecting function<br>Multiple Verification Modes: Multi-verification methods (card is optional) providing user various choices<br>Full Access Control Features: Anti-passback, access control interface for 3rd party electric lock, door sensor, exit button, alarm and doorbell                                                                                                                                                                   | <b>162 240</b> |
| Standalone Device              | Fingerprint              | 1.54" OLED                | TF1700      |     | 1.54" OLED Screen<br>IP65 waterproof and dustproof<br>Fingerprint and RFID Identification<br>Fingerprint Capacity: 3, 000<br>ID card Capacity: 10, 000<br>Log Capacity: 30, 000<br>Communication:TCP/IP, RS485, USB Host<br>Access Control Interface for electric lock, door sensor, alarm, exit button and door bell.<br><del>Wiegand input&amp;output</del>                                                                                                                                                                                                                   | <b>137 280</b> |
| Standalone Device              | Fingerprint              | 2.4" Color Display        | F19(ZMM210) |     | 2.4 inch TFT-LCD screen<br>Fingerprint Identification<br>Fingerprint Capacity: 3, 000<br>User/Card Capacity (Optional): 5,000(10,000)<br>Log Capacity: 100, 000<br>Communication:TCP/IP, RS232/485, USB Host,WIFI(Optional 12480 tr)<br>Access Control Interface for electric lock, door sensor, alarm, exit button and door bell.<br>Wiegand input&output<br>Push AC Standard                                                                                                                                                                                                  | <b>118 560</b> |
| Standalone Device              | Fingerprint              | 2.4" Color Display        | F18(ZMM210) |    | 2.4 inch TFT-LCD screen<br>Fingerprint Identification<br>Fingerprint Capacity: 3, 000<br>Card Capacity(Optional): 5000<br>Log Capacity: 30, 000<br>Communication:TCP/IP, RS232/485, USB Host,WIFI(Optional 12480 tr)<br>Access Control Interface for electric lock, door sensor, alarm, exit button and door bell.<br>Wiegand input&output<br>Push AC Standard<br>Standalone AC push /TA Push HTTPS(Optional)<br>Optional: ID, MF, HID(+45), iclass(+95)                                                                                                                        | <b>118 560</b> |
| Standalone Device              | Fingerptint TA&AC Device | 2.4" Color Display        | F22(ZLM60)  |   | Fingerprint Capacity: 3000<br>Card Capacity(Optional): 5000<br>Record Capacity: 30, 000<br>Communication: Wi-Fi, TCP/IP, USB host, RS232/485<br>Standard Functions: BioID, DST, Require Query, 14 Digit User ID, Automatic Status Switch, Schedule-bell, T9 Input, Advance access control function, Anti-passback, External RS485 fingerprint reader , Touch Keypad<br>AC push Standard<br>Optional: Printer, ADMS, ID, Mifare card.,Felica card                                                                                                                                | <b>82 368</b>  |
| Standalone Device              | Fingerprint              | 2.4" Color Display        | SF100       |   | 2.4-inch TFT-LCD screen<br>Fingerprint Capacity: 1, 500<br>Log Capacity: 80, 000<br>Communication:TCP/IP, RS485, USB Host<br>Access Control Interface for electric lock, door sensor, alarm, exit button and door bell.<br>Wiegand input&output<br>1 ea Aux. input for linkage function                                                                                                                                                                                                                                                                                         | <b>68 640</b>  |
| Standalone Device              | Fingerprint              | 2" Color Display          | F7-C        |   | 2-inch TFT-LCD screen<br>User&Card Ccapacity : 5,000<br>Fingerprint Capacity: 2,000<br>Log Capacity: 100,000<br>Optional RFID : 125KHz ID & 13.56MHz IC<br>Communication:TCP/IP, RS485, WIFI<br>Access Control Interface for electric lock, door sensor, alarm, exit button and door bell.<br><del>Wiegand output (optional wiegand input 6240 tr)</del>                                                                                                                                                                                                                        | <b>68 640</b>  |
| Access Control Products        | Fingerprint              | 2.4" Color Display        | LF10        |   | Display: 2.4 inch TFT LCD Color Screen (keypad)<br>Fingerprint Capacity:1,500 Templates<br>Transaction Capacity: 80, 000 Transactions<br>Algorithm Version: ZKFinger VX10.0<br>Communication: TCP/IP, USB-host<br>Access Control Interface: 3rd Party Electric Lock, Door Sensor, Exit Button, Alarm, Doorbell, Wiegand Out<br>Aux. Input:1ea for linkage function<br>Standard Function: Record Query, 9-digit User ID, ADMS, ID Card, Advanced access control, Wired doorbell<br>Optioanal Function: MF Card<br>AC Adapter: 12V DC, 1.5A<br>Operating Temperature: 0 °C- 45 °C | <b>62 400</b>  |
| LF10 Access Control Device Kit | Fingerprint              | 2.4" Color Display        | LF10 Kit    |  | <b>What's in the box?</b><br>Package with Electric Bolt Lock:<br><br>1* LF10 Access Control Terminal with Installation Guide & Quick Start Guide and cables;<br>1* TLEB102 Non touch Exit Button with Installation Guide;<br><b>1* LM-2805 Electronic Magnetic Lock with User manual and 1*LMB-280U Lock Bracket;</b><br>10* RFID Thin Cards ( <b>ID or Mifare card</b> );<br><br>For more detail,please refer the LF10 Kit Leaflet.                                                                                                                                            | <b>87 360</b>  |



|                                 |             |                    |                   |                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |         |
|---------------------------------|-------------|--------------------|-------------------|--------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Access Control Products         | Fingerprint | 2.4" Color Display | LF20              |     | Display: 2.4 inch TFT LCD Color Screen (keypad)<br>Fingerprint Capacity:1,500 Templates<br>Transaction Capacity: 80, 000 Transactions<br>Algorithm Version: ZKFinger VX10.0<br>Communication: TCP/IP, USB-host<br>Access Control Interface: 3rd Party Electric Lock, Door Sensor, Exit Button, Alarm, Doorbell, Wiegand Out<br>Aux. Input:1ea for linkage function<br>Standard Function: Record Query, 9-digit User ID, ADMS, ID Card, Advanced access control, Wired doorbell<br>Optioanal Function: MF Card<br>AC Adapter: 12V DC, 1.5A<br>Operating Temperature: 0 °C- 45 °C<br>Operating Humidity: 20%-80% | 62 400  |
| Standalone Device               | Fingerprint | 2.8' Color Display | SF300(ZLM60)      |    | 2.8-inch Color Display and Touch Screen<br>Card Capacity: 5,000<br>Fingerprint Capacity: 1,500<br>Log Capacity: 80,000<br>Communication:TCP/IP, RS485(reader), USB Host<br>Access Control Interface for electric lock, door sensor, alarm, exit button and door bell.<br>Wiegand input&output<br>1 ea Aux. input for linkage function<br>Certification: CE(RED), FCC<br>Optional ID6240 TF F02010656, MF12480 TF F02010657                                                                                                                                                                                     | 74 880  |
| Standalone Device               | Fingerprint | 2.8' Color Display | SF400(ZLM60)      |    | 2.8-inch Color Display and Touch Screen<br>Card Capacity: 5,000<br>Fingerprint Capacity: 1,500<br>Log Capacity: 80,000<br>Communication:TCP/IP, RS485(reader), USB Host<br>Access Control Interface for electric lock, door sensor, alarm, exit button and door bell.<br>Wiegand input&output<br>1 ea Aux. input for linkage function<br>Certification: CE(RED), FCC                                                                                                                                                                                                                                           | 74 880  |
| SF400 Access Control Device Kit | Fingerprint | 2.8' Color Display | SF400 E lock Kit  |  | <b>What's in the box?</b><br>Package with Electronic Magnetic Lock:<br>1* SF400 Access Control Terminal with Installation Guide & Quick Start Guide and cables;<br>1* TLEB102-R Non touch Exit Button with remote key and Installation Guide;<br><b>1* AL-280 (LED) Electronic Magnetic Lock with User manual and 1* AS32 Door Sensor;</b><br>1* PS901B Power Supply with Installation guide (Standard 220V X01701038 Power Supply and Optional 110V X01701040 Power Supply);                                                                                                                                  | 112 320 |
| SF400 Access Control Device Kit | Fingerprint | 2.8' Color Display | SF400 EM lock Kit |  | <b>What's in the box?</b><br>Package with Electric Bolt Lock:<br>1* SF400 Access Control Terminal with Installation Guide & Quick Start Guide and cables;<br>1* TLEB102-R Non touch Exit Button with remote key and Installation Guide;<br><b>1* AL-100 Electric Bolt Lock with User manual;</b><br>1* PS901B Power Supply with Installation guide (Standard 220V X01701038 Power Supply and Optional 110V X01701040 Power Supply);                                                                                                                                                                            | 112 320 |
| Standalone Device               | Fingerprint | None               | F16               |   | PULL SDK firmware<br>IP65 waterproof and dustproof<br>Fingerprint Capacity: 3, 000<br>ID Card Capacity: 30, 000<br>Log Capacity: 100, 000<br>Communication:TCP/IP, RS485<br>Access Control Interface for electric lock, door sensor, alarm, exit button.                                                                                                                                                                                                                                                                                                                                                       | 68 640  |
| Standalone Device               | Fingerprint | None               | TF1600            |   | Resistant to low temperature(-40 ~45 )<br>PULL SDK firmware<br>IP65 waterproof and dustproof<br>Fingerprint Capacity: 3, 000<br>ID Card Capacity: 30, 000<br>Log Capacity: 100, 000<br>Communication:TCP/IP, RS485<br>Access Control Interface for electric lock, door sensor, alarm, exit button.                                                                                                                                                                                                                                                                                                             | 174 720 |
| Standalone Device               | Fingerprint | None               | Notus             |   | Camera :2MP/1080P, IR light<br>Fingerprint Capacity: 10,000<br>Card Capacity :50,000<br>Log Capacity :200,000<br>Communication :TCP/IP, WIFI (Optional)<br>Access Control Interface: 3rd Party Electric Lock, Door Sensor, Exit Button, Alarm, Doorbell<br>Functions :Webserver,DST, Record Query, Anti-passback, External RS485 fingerprint/Card reader and Wegand reader,ADMS,HTTP/HTTPS,POE(Optional)<br>Multi-Frequency Card: ID,IC, EM/ IC /IC EV1 (B133 Optional)<br>Switch Model:Standalone or Reader;<br>Wiegand Signal :Input Output :                                                                | 137 280 |

|                         |                          |              |              |                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |         |
|-------------------------|--------------------------|--------------|--------------|--------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Standalone Device       | Fingerprint              | None         | MA500        |     | Fingerprint and RFID Identification<br>PULL SDK firmware<br>Metal Casing, IP65 waterproof and dustproof<br>Fingerprint Capacity: 3, 000<br>ID card Capacity: 30, 000<br>Log Capacity: 100, 000<br>Communication: TCP/IP, RS485<br>Access Control Interface for electric lock, door sensor, alarm, exit button.                                                                                                                                                                                                                                                                     | 93 600  |
| Standalone Device       | Fingerprint              | None         | MA300-BT     |     | Fingerprint and RFID Identification, Metal Casing, IP65 waterproof and dustproof.<br>Fingerprint Capacity: 1, 500 (ZK Optical Sensor)<br>ID card Capacity: 10, 000<br>Log Capacity: 100, 000<br>Communication: TCP/IP, RS485, USB Host, Bluetooth<br>Access Control Interface for electric lock, door sensor, alarm, exit button.<br>Wiegand Signal: input&output<br>Standard Access Control Function: RS485 Reader, Time Zone, Group, Duress mode, Anti-passback.<br>Optional Functions: Mifare, external USB keypad, Multi                                                       | 91 104  |
| Standalone Device       | Fingerprint              | None         | MA300(ZLM60) |     | Fingerprint and RFID Identification<br>Metal Casing, IP65 waterproof and dustproof<br>Fingerprint Capacity: 1, 500<br>card Capacity: 10, 000(ID standard,MF optional)<br>Log Capacity: 100, 000<br>Communication: TCP/IP, RS485, USB Host<br>Access Control Interface for electric lock, door sensor, alarm, exit button.<br>Wiegand Signal: input&output<br><b>A&amp;C push Standard, standalone A&amp;C Optional</b>                                                                                                                                                             | 84 864  |
| Access Control Products | Fingerprint A&C Device   | None         | X8-BT        |   | Simple access control function, Bluetooth communication, touch keypad, door bell.<br>Fingerprint Capacity: 500 Templates (SilkID Sensor)<br>Card Capacity: 500<br>Transaction Capacity: N/A<br>Algorithm Version: ZKFinger VX10.0<br>Access Control Interface: 3rd Party Electric Lock, Door Sensor, Exit Button, Alarm, Doorbell.<br>Standard Function: Simple access control function, ID card                                                                                                                                                                                   | 56 160  |
| Access Control Products | Fingerprint A&C Device   | None         | X8s          |  | Simple access control function, no communication, touch keypad, door bell<br>Fingerprint Capacity: 500 Templates<br>Card Capacity: 500<br>Transaction Capacity: N/A<br>Sensor: ZK Optical Sensor<br>Algorithm Version: ZKFinger VX10.0<br>Access Control Interface: 3rd Party Electric Lock, Door Sensor, Exit Button, Alarm, Doorbell<br>Standard Function: Simple access control function, ID card<br>Optional Function: Mifare Card(6240 tr)<br>AC Adapter: 12V DC, 3A<br>Operating Temperature: 0 °C- 45 °C<br>Operating Humidity: 20%-80%<br>Dimensions (LxWxH): 90×90×38.9mm | 37 440  |
| Standalone Device       | Fingerprint              | None         | X7           |   | Fingerprint/Card/Password Identification<br>Fingerprint Capacity: 500<br>Card Capacity: 500<br>Password Capacity: 8 groups<br>Log Capacity: N/A<br>Communication: N/A<br>Access Control Interface for electric lock, door sensor, Security Relay Box (SRB)                                                                                                                                                                                                                                                                                                                         | 32 448  |
| AC Module               | Mini Controller          | None         | SRB          |   | An external relay box to control door lock, exit button and connect with standalone devices by wiegand to enhance higher security.                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 9 984   |
| Reader                  | RS232 Fingerprint Reader | 2.8" Display | BR1200s[FBE] |   | RS232 Reader<br>Fingerprint, ID Card, Barcode<br>Barcode : PDF417, QR code Model 1/2, Micro QR, Data Matrix, GS1-DataBar (Limited, Stacked, Expanded)<br>Compatibility : BR1200, others with RS232 request customization<br>MF optional : 6240 tr                                                                                                                                                                                                                                                                                                                                  | 212 160 |
| Reader                  | RS232 Palm Reader        | 2.8" Display | BR1200s[PBE] |   | RS232 Reader<br>Palm, ID Card, Barcode<br>Barcode : PDF417, QR code Model 1/2, Micro QR, Data Matrix, GS1-DataBar (Limited, Stacked, Expanded)<br>Compatibility : BR1200, others with RS232 request customization<br>MF optional : 6240 tr                                                                                                                                                                                                                                                                                                                                         | 218 400 |
| Reader                  | RS485 Fingerprint Reader | None         | FR1500S      |   | <b>Single gang Standard junction box installation.</b><br><b>RS-485 Communication Interface.</b><br><b>Stainless Steel Front casing.</b><br><b>Supports IP65 rate</b><br><b>Standard : SilkID Fingerprint Sensor.</b><br><b>Fingerprint Protective Cover.</b><br><b>Standard: ID card.</b><br><b>Optional: Mifare (+6240 tr) , HID (+49920 tr) , iclass card (+74880)</b>                                                                                                                                                                                                          | 58 656  |

|                   |                             |                       |              |                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                |
|-------------------|-----------------------------|-----------------------|--------------|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Reader            | RS485 Fingerprint Reader    | None                  | FR1200       |  | Read Fingerprint and Proximity card<br>Communication: RS485 with inBIO controller or Fingerprint devices<br>DIP switch for RS485 address                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <b>54 912</b>  |
| Reader            | RS485 Fingerprint Reader    | None                  | FR1300       |  | Read Fingerprint, password and ID card (Optional with 6240 tr)<br>Communication: RS485 with inBIO controller or Fingerprint devices<br>DIP switch for RS485 address                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <b>46 176</b>  |
| Standalone Device | Multi-Biometric             | 3" Color Display      | MultiBIO 700 |                                                                                   | Multi-Biometric Identification<br>Face Capacity: 1, 500 (1:N)<br>Fingerprint Capacity: 2, 000<br>Log Capacity: 100, 000<br>Communication: TCP/IP, RS232/485, USB Host<br>Access Control Interface for electric lock, door sensor, alarm, exit button and door bell.                                                                                                                                                                                                                                                                                                                                                 | <b>212 160</b> |
| Standalone Device | Visible Light Face Device   | 5" Color Touch Screen | SpeedFace-H5 |                                                                                   | Display: 5" LCD Color Touch Screen<br>Face Capacity: 6,000(1:N)<br>FingerPrint Capacity:10,000<br>RFID Capacity:10,000<br>Transaction Capacity: 200, 000 Transactions<br>Memory: 2G RAM / 16G ROM                                                                                                                                                                                                                                                                                                                                                                                                                   | <b>274 560</b> |
| Standalone Device | Visible Light Face Device   | 5" Color Touch Screen | SpeedFace-V5 |                                                                                   | Display: 5" LCD Color Touch Screen<br>Face Capacity: 6,000(1:N)<br>FingerPrint Capacity:10,000<br>RFID Capacity(Optional):10,000<br>Transaction Capacity: 200, 000 Transactions<br>Memory: 2G RAM / 16G ROM<br>Communication: RS485, RS232, TCP/IP<br>AC Adapter: 12V DC, 3A<br>Operating Temperature: 0 °C- 45 °C                                                                                                                                                                                                                                                                                                  | <b>274 560</b> |
| Standalone Device | Fingerprint and finger vein | 2.4" color screen     | FV18         |                                                                                   | 2.4-inch color screen<br>Fingerprint Capacity: 1, 000<br>Finger Vein Capacity: 1, 000<br>Card Capacity(Optional): 5, 000 (optional)<br>Log Capacity: 100, 000<br>Communication: TCP/IP, USB Host, WIFI(Optional)                                                                                                                                                                                                                                                                                                                                                                                                    | <b>99 840</b>  |
| Standalone Device | Fingerprint and finger vein | 2.8" touch screen     | FV350        |                                                                                   | 2.8-inch touch screen<br>Fingerprint Capacity: 1, 000<br>Finger Vein Capacity:1, 000<br>Card Capacity(Optional):2, 000<br>Log Capacity: 100, 000<br>Communication: TCP/IP, RS485, USB Host                                                                                                                                                                                                                                                                                                                                                                                                                          | <b>156 000</b> |
| Reader            | RS485 Fingerprint Reader    | None                  | FR1500-WP    |                                                                                   | RS485 Fingerprint Reader, Single gang, IP65 water proof.<br>Standard: ID card, BioID Sensor.<br>Optional: Mifare, HID, iclass card.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <b>58 656</b>  |
| Standalone Device | Visible Light Face Device   | 7" Color Screen       | FaceDepot-7A |                                                                                   | Display: 7" LCD Color Screen(1024*600 Pixel)<br>Face Capacity: 10,000(1:N)<br>RFID Capacity:10,000(Optional EM & MF)<br>Transaction Capacity: 100, 000 Transactions<br>Memory: 2G RAM / 16G ROM<br>Communication: RS485, RS232, TCP/IP, 2ch USB, Wiegand Input/Output<br>Access Control Interface: 2ch Relay<br>AC Adapter: 12V DC, 3A<br>Operating Temperature: 0 °C- 45 °C<br>Operating Humidity: 10%-90%<br>Standard Functions : Advance access controll, Lock, Sensor, Alarm, Exit Button, Aux Input<br>Optional: WIFI, EM, MF<br>SDK: AI PUSH SDK<br>Software: ZKBioSecurity3.0/ZKBioAccess<br>Distance Sensor | <b>374 400</b> |



Прайс-лист на контроллеры


| Тип 1                   | Тип 2             | Тип 3 | Модель            | Фото                                                                                | Параметры                                                                                                                                                                                                                                                                                                                                        | Цена розница |
|-------------------------|-------------------|-------|-------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| Networked Control Panel | C2 Series         | None  | C2-260            |    | Two-door Two-way Controller<br>CPU:32-bit 1.0GHz<br>RAM:64M<br>Card Capacity:30,000;<br>Log Capacity:200,000;<br>Number of Auxiliary Inputs:2<br>Number of Auxiliary Outputs:2<br>Types of Readers Supported:RS485 card reader, Wiegand reader (WR485)<br><b>Function : Push SDK,Webserver, Http/HTTPS,</b><br>DM10:Max.8<br>AUX485:2<br>WR485:4 | 46 176       |
| Networked Control Panel | C2 Series         | None  | C2-260 Package    |   | Include:<br>C2-260:1;<br>AUX485: 1 ,Max 2;<br>AC Adapter:1 AP258 with CE;<br>Backup battery: designed the Structure;                                                                                                                                                                                                                             | 86 112       |
| Networked Control Panel | C3 Series Panel   | None  | C3-100            |  | One-door Two-way Controller<br>CPU:32bit MIPS CPU<br>RAM:32M bits<br>Flash Memory:256M bits<br>User:30, 000<br>Event Buffer: 100, 000<br>Reader Port: 2ea (26/34bits wiegand, 8bits burst for PIN)<br>Communication:RS485, TCP/IP                                                                                                                | 49 920       |
| Networked Control Panel | C3 Series Panel   | None  | C3-200            |  | Two-door Two-way Controller<br>CPU:32bit MIPS CPU<br>RAM:32M bits<br>Flash Memory:256M bits<br>User:30, 000<br>Event Buffer: 100, 000<br>Reader Port:2ea (26/34bits wiegand, 8bits burst for PIN)<br>Communication:RS485, TCP/IP                                                                                                                 | 69 888       |
| Networked Control Panel | C3 Series Panel   | None  | C3-400            |  | Four-door One-way Controller<br>CPU:32bit MIPS CPU<br>RAM:32M bits<br>Flash Memory:256M bits<br>User:30, 000<br>Event Buffer:100, 000<br>Reader Port:4ea(26/34bits wiegand, 8bits burst for PIN)<br>Communication:RS485, TCP/IP                                                                                                                  | 91 104       |
| Networked Control Panel | inBio Series      | None  | inBio160          |  | One-door Two-way Controller<br>CPU:32bit MIPS CPU<br>RAM:32M bits<br>Flash Memory:256M bits<br>User:30, 000<br>Fingerprint:3,000 (Optional 20,000 24960 tr)<br>Event Buffer: 100, 000<br>Reader Port:2ea wiegand and RS485 connect 2 FD reader                                                                                                   | 89 856       |
| Networked Control Panel | inBio Series      | None  | inBio260          |  | Two-door Two-way Controller<br>CPU:32bit MIPS CPU<br>RAM:32M bits<br>Flash Memory:256M bits<br>User:30, 000<br>Fingerprint:3,000 (Optional 20,000 24960 tr)<br>Event Buffer: 100, 000<br>Reader Port:4ea wiegand and RS485 connect 4 FD                                                                                                          | 139 776      |
| Networked Control Panel | inBio Series      | None  | inBio460          |  | Four-door Two-way Controller<br>CPU:32bit MIPS CPU<br>RAM:32M bits<br>Flash Memory:256M bits<br>User:30, 000<br>Fingerprint:3,000 (Optional 20,000 24960 tr)<br>Event Buffer: 100, 000<br>Reader Port: 4ea wiegand and RS485 connect 8 FD                                                                                                        | 189 696      |
| Networked Control Panel | C3 Series Package | None  | C3-100 Package B  |  | A package of C3-100 including Metal box and PSU(AC Adapter Unit)                                                                                                                                                                                                                                                                                 | 73 632       |
| Networked Control Panel | C3 Series Package | None  | C3-100 POE Bundle |  | A package of C3-100 including Metal box and POE Splitter. Which can give AC Adapter to both controller and lock.                                                                                                                                                                                                                                 | 83 616       |
| Networked Control Panel | C3 Series Package | None  | C3-200 Package B  |  | A package of C3-200 including Metal box and PSU(AC Adapter Unit)                                                                                                                                                                                                                                                                                 | 103 584      |



|                         |                      |             |                    |                                                                                     |                                                                                                                                                                                                                                                                                                       |                |
|-------------------------|----------------------|-------------|--------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Networked Control Panel | C3 Series Package    | None        | C3-400 Package B   |    | A package of C3-400 including Metal box and PSU(AC Adapter Unit)                                                                                                                                                                                                                                      | <b>122 304</b> |
| Networked Control Panel | inBio Series Package | None        | inBIO160 Package B |    | A package of inBIO160 including Metal box and PSU(AC Adapter Unit)                                                                                                                                                                                                                                    | <b>121 056</b> |
| Networked Control Panel | inBio Series Package | None        | inBIO260 Package B |    | A package of inBIO260 including Metal box and PSU(AC Adapter Unit)                                                                                                                                                                                                                                    | <b>170 976</b> |
| Networked Control Panel | inBio Series Package | None        | inBIO460 Package B |    | A package of inBIO460 including Metal box and PSU(AC Adapter Unit)                                                                                                                                                                                                                                    | <b>220 896</b> |
| Networked Control Panel | Domo Kit             | None        | C3-400 Demo Kit    |    | C3-400 Demo Kit<br>One C3-400, Two RFID wiegand reader, AC Adapter, etc.                                                                                                                                                                                                                              | <b>334 464</b> |
| Networked Control Panel | Domo Kit             | None        | inBIO460 Demo Kit  |   | inBIO460 Demo Kit<br>One inBIO460, Two FR1200, AC Adapter, etc.                                                                                                                                                                                                                                       | <b>526 656</b> |
| Elevator Control System | Elevator Control     | B&W Display | EC10               |  | Floor Button Control Relay: 10<br>Fingerprint: 3000<br>Card:30, 000<br>Event Capacity:100, 000;<br>Communication to PC: TCP/IP, RS485<br>Communication to EX16: RS485                                                                                                                                 | <b>164 736</b> |
| Elevator Control System | Elevator Control     | None        | EC10 Package B     |  | A package of EC10 including Metal box and PSU(AC Adapter Unit)                                                                                                                                                                                                                                        | <b>202 176</b> |
| Elevator Control System | Elevator Control     | None        | EX16               |  | Floor Button Control Relay: 16<br>Communication to EC10: RS485<br>RS485 address: Set by DIP switch<br>AC Adapter: 12V DC 1A                                                                                                                                                                           | <b>49 920</b>  |
| Elevator Control System | Elevator Control     | None        | EX16 Package A     |  | A package including 1 piece EX16, AC Adapter and metal box                                                                                                                                                                                                                                            | <b>81 120</b>  |
| Elevator Control System | Elevator Control     | None        | EX16 Package B     |  | A package including 2 pieces EX16, AC Adapter and metal box                                                                                                                                                                                                                                           | <b>131 040</b> |
| Networked Control Panel | C5S Series Panel     | None        | C5S110             |  | One-door Two-way Controller<br>CPU:1.2GHz<br>RAM:128M bits<br>Flash Memory:256M bits<br>User:100, 000<br>Event Buffer: 200, 000<br>Reader Port: 2ea wiegand reader or 2ea RS485 card reader<br>Communication: RS485, TCP/IP,WIFI                                                                      | <b>74 880</b>  |
| Networked Control Panel | C5S Series Panel     | None        | C5S120             |  | Two-door Two-way Controller<br>CPU:1.2GHz<br>RAM:128M bits<br>Flash Memory:256M bits<br>User:100, 000<br>Event Buffer: 200, 000<br>Reader Port: 4ea wiegand reader or 4ea RS485 card reader<br>Communication: RS485, TCP/IP,WIFI                                                                      | <b>97 344</b>  |
| Networked Control Panel | C5S Series Panel     | None        | C5S140             |  | Four-door Two-way/Two-door Two-way Controller(USing RS485 reader can support Four-door Four-way)<br>CPU:1.2GHz<br>RAM:128M bits<br>Flash Memory:256M bits<br>User:100, 000<br>Event Buffer: 200, 000<br>Reader Port: 4ea wiegand reader or 8ea RS485 card reader<br>Communication: RS485, TCP/IP,WIFI | <b>118 560</b> |
| Networked Control Panel | C5S Series Panel     | None        | C5S110 Package A   |  | A package of C5S110 including Metal box and PSU(AC Adapter Unit)                                                                                                                                                                                                                                      | <b>108 576</b> |


|                         |                  |      |                  |                                                                                   |                                                                  |         |
|-------------------------|------------------|------|------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------|---------|
| Networked Control Panel | C5S Series Panel | None | C5S120 Package A |  | A package of C5S120 including Metal box and PSU(AC Adapter Unit) | 131 040 |
| Networked Control Panel | C5S Series Panel | None | C5S140 Package A |  | A package of C5S140 including Metal box and PSU(AC Adapter Unit) | 149 760 |




Прайс-лист на комплектующие для оборудования СКД


| Тип             | Модель                                                    | Фото                                                                                | Параметры                                                                                                                                                                       | Совместимое устройство                                                                                                                                                                                              | Цена розница |
|-----------------|-----------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| A&C Accessories | DM10                                                      |    | 1 Lock Sensor, 1 Exit Button<br>2 Wiegand Readers<br>1 AUX IN, 1 AUX OUT<br>12V AC Adapter In & Out<br>RS485 Communication                                                      | C2-260/F18-DM/Horus                                                                                                                                                                                                 | 16 224       |
| A&C Accessories | WR485                                                     |    | 1 RS485 convert to 1 Wiegand                                                                                                                                                    | C2-260                                                                                                                                                                                                              | 6 240        |
| A&C Accessories | AUX485                                                    |    | 1 RS485 convert to 4 AUX in                                                                                                                                                     | C2-260                                                                                                                                                                                                              | 6 240        |
| A&C Accessories | Fpmodule (for 7B) [ID]                                    |   | Used With FaceDepot-7B                                                                                                                                                          |                                                                                                                                                                                                                     | 37 440       |
| A&C Accessories | Fpmodule (for 7B) [MF]                                    |  | Used With FaceDepot-7B                                                                                                                                                          |                                                                                                                                                                                                                     | 49 920       |
| Bracket         | Rots-3 Stand                                              |  | Aluminum Alloy<br>Adjustment Angle Range : Vertical up/down 20°, Horizontal left/right 90°                                                                                      | ProFace X Series, SpeedFace-V5/V5L Series, FaceDepot Series and Elite Series                                                                                                                                        | 24 960       |
| Bracket         | KJZ-03                                                    |  | aluminum alloy 80*38*370mm<br>Used with FaceDepot-7A/FaceDepot-7B/SpeedFace-V5 FaceDepot-7BL/SpeedFaceV5L/ProFace X FaceDepot-7BL[TD]/SpeedFace-V5L[TD]                         | FaceDepot-7A/FaceDepot-7B/SpeedFace-V5<br>FaceDepot-7BL/SpeedFaceV5L/ProFace X<br>FaceDepot-7BL[TD]/SpeedFace-V5L[TD]                                                                                               | 24 960       |
| Bracket         | Rots-02 Package                                           |  | aluminum alloy 128mm<br>Used with ProFace X,ProFace X[TD],ProFace X[TI],<br>Optional:SpeedFace-V5L,SpeedFace-V5L[TI],SpeedFace-V5L[TD],Need to note new rear pallets: A87130001 | ProFace X,ProFace X[TD],ProFace X[TI]<br>SpeedFace-V5L,SpeedFace-V5L[TI],SpeedFace-V5L[TD]                                                                                                                          | 24 960       |
| Bracket         | SpeedFace-V5 Beveled Thread Box Set (SpeedFace-V5斜角藏线盒套包) |  | Aluminum alloy<br>200mm*77mm*50mm oxidized silver sandblasted                                                                                                                   | SpeedFace-V5,SpeedFace-V5L,SpeedFace-V5L[P],SpeedFace-V5L[TD],SpeedFace-V5L-RFID,SpeedFace-V5L-RFID[TD]<br><br>Not fit SpeedFace-V5L[TI], SpeedFace-V5L-RFID[TI], Unless the rear panel is replaced, use A13130042. | 24 960       |
| Bracket         | KJZ-03 Extension Bar                                      |  | 250mm( Excluding the thread length, the actual length is 200mm )<br>Used for Lengthen KJZ-03/ProFace X[CH]/FaceDepot-7B[CH]/FaceDepot-7BL[CH]                                   | KJZ-03/ProFace X[CH]/FaceDepot-7B[CH]/FaceDepot-7BL[CH]                                                                                                                                                             | 12 480       |
| Bracket         | Rots-1 Stand                                              |  | 93*125*66.13 cm<br>Vertical 20°, Horizontal 30°<br>Material: SPCC                                                                                                               | SpeedFaceV5 / SpeedFaceV5-L / FaceDepot7B / FaceDepot7B-L / Proface-X / Elite Series                                                                                                                                | 19 344       |
| Bracket         | ZK-L1                                                     |  | Floor-mounted Bracket for Visible Light Face Terminal<br>400*265*1350mm<br>Material : SPCC+ powder spraying<br>Optional: Rots-1 Stand                                           | SpeedFace-V5 & V5L Series, Proface X Series, Elite Access, RevFace 10[TI], SpeedFace-H5 & H5L Serie                                                                                                                 | 81 120       |



|             |                            |                                                                                    |                                                                                                                                                                                                                                               |                                                                                                                             |         |
|-------------|----------------------------|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|---------|
| Bracket     | ZK-L2                      |   | Floor-mounted Bracket<br>for Visible Light Face Terminal<br>540*265*1450mm<br>Material : SPCC+ powder spraying<br>Optional: Rots-1 Stand                                                                                                      | SpeedFace-V5 & V5L Series, Proface X<br>Series, Elite Access, RevFace 10[TI],<br>SpeedFace-H5 & H5L Serie                   | 87 360  |
| Bracket     | ZK-L3                      |   | Desktop Stand ;<br>Dimensions: 210*236.2*166 mm<br>Angle Adjustment: 360°<br>Material: SPCC<br>Weight:1.6KG                                                                                                                                   | Proface X Series, SpeedFace-V5 & V5L<br>Series, SpeedFace-H5 & H5L Series, Elite<br>Access,<br>FaceDepot-7B / 7BL, G4 / G4L | 24 960  |
| Bracket     | ZK-L4                      |   | Easy Mounting Bracket;<br>Dimensions (mm): 336*292*870mm<br>Bracket Weight (kg) :1.45Kg<br>Base Weight (kg) : 3.37Kg<br>Angle Adjustment: -10° to 30 °<br>Material: aluminum alloy<br><b>Adjustable height : 970mm to 1670mm</b>              | Proface X Series, SpeedFace-V5 & V5L<br>Series, SpeedFace-H5 & H5L Series,<br>FaceDepot-7B / 7BL,<br>G4 / G4L, Elite Access | 68 640  |
| Bracket     | ZK-L5                      |   | Mounting Bracket for Visible Light<br>Products<br>Dimensions (mm):336*292*977mm<br>Bracket Weight (kg) :4.35Kg<br>Base Weight (kg) : 3.37Kg<br>Angle Adjustment: -10° to 30 °<br>Material: SPCC<br><b>Adjustable height : 970mm to 1670mm</b> | Proface X Series, SpeedFace-V5 & V5L<br>Series, SpeedFace-H5 & H5L Series,<br>FaceDepot-7B / 7BL,<br>G4 / G4L, Elite Access | 114 816 |
| Bracket     | ZK-L6                      |  | Mounting Bracket for Visible Light<br>Products<br>Dimensions (mm):<br>307*313*1260mm<br>Bracket Weight (kg) :4.5Kg<br>Base Weight (kg) : 4.37Kg<br>Angle Adjustment: Can't adjust<br>Material: SPCC<br><b>Fixed height : 1260mm</b>           | Proface X Series, SpeedFace-V5 & V5L<br>Series, SpeedFace-H5 & H5L Series,<br>FaceDepot-7B / 7BL,<br>G4 / G4L, Elite Access | 93 600  |
| Display     | 7inch TFT Display          |                                                                                    | 720*1280                                                                                                                                                                                                                                      | FaceDepot-7A                                                                                                                | 49 920  |
| Other       | ultrasonic Distance sensor |                                                                                    | Distance detector module                                                                                                                                                                                                                      | FaceDepot-7A                                                                                                                | 18 720  |
| Camera      | 2MP Camera module          |                                                                                    | Dual camera module, 2MP                                                                                                                                                                                                                       | FaceDepot-7A<br>FaceDepot-7B<br>SpeedFace-H5<br>SpeedFace-V5                                                                | 74 880  |
| Main Board  | Main Board                 |                                                                                    | Main board withou optional function                                                                                                                                                                                                           | FaceDepot-7A                                                                                                                | 74 880  |
| PCB         | Full Light PCB             |                                                                                    | visible light LED and IR light LED<br>repare                                                                                                                                                                                                  | FaceDepot-7A                                                                                                                | 6 240   |
| Core board  | ZSM760                     |                                                                                    | Quad core 1.8Ghz, 2G RAM/16G<br>ROM                                                                                                                                                                                                           | FaceDepot-7A<br>FaceDepot-7B<br>SpeedFace-H5<br>SpeedFace-V5<br>G4                                                          | 124 800 |
| Display     | 7inch TFT Display          |                                                                                    | 720*1280                                                                                                                                                                                                                                      | FaceDepot-7A                                                                                                                | 49 920  |
| Touch panel | 7inch touch panel          |                                                                                    | touch panel without logo                                                                                                                                                                                                                      | FaceDepot-7B                                                                                                                | 12 480  |
| PCB         | Full Light PCB             |                                                                                    | visible light LED and IR light LED<br>repare                                                                                                                                                                                                  | FaceDepot-7B                                                                                                                | 6 240   |
| Casing      | Front casing               |                                                                                    | aluminium alloy, 113*210*22mm                                                                                                                                                                                                                 | FaceDepot-7B                                                                                                                | 7 488   |
| PCB         | Access interface PCB(ID)   |                                                                                    | PCB for access port and ID card<br>module                                                                                                                                                                                                     | FaceDepot-7B                                                                                                                | 12 480  |
| Sensor      | SilkID Sensor              |                                                                                    | SILKID (32MB/USB)                                                                                                                                                                                                                             | FaceDepot-7A<br>FaceDepot-7B<br>SpeedFace-H5<br>SpeedFace-V5                                                                | 37 440  |
| PCB         | Access interface PCB(IC)   |                                                                                    | PCB for access port and IC card<br>module                                                                                                                                                                                                     | FaceDepot-7B                                                                                                                | 24 960  |
| Casing      | Back casing                |                                                                                    | aluminium alloy,<br>109.4*206.4*37.7mm, label laser                                                                                                                                                                                           | FaceDepot-7B                                                                                                                | 3 744   |
| Casing      | Back casing                |                                                                                    | aluminium alloy,<br>109.4*206.4*37.7mm, label laser                                                                                                                                                                                           | FaceDepot-7B                                                                                                                | 6 240   |
| Main Board  | Main Board(ID)             |                                                                                    | SpeedFace H5 mainboard with ID<br>moduel                                                                                                                                                                                                      | SpeedFace-H5                                                                                                                | 62 400  |
| Display     | 5inch TFT LCD              |                                                                                    | Color Display                                                                                                                                                                                                                                 | SpeedFace-H5                                                                                                                | 24 960  |
| Touch panel | 5inch touch panel          |                                                                                    | 5inch touch panel with zkteco logo                                                                                                                                                                                                            | SpeedFace-H5                                                                                                                | 24 960  |
| PCB         | Full Light PCB             |                                                                                    | visible light LED and IR light LED<br>repare                                                                                                                                                                                                  |                                                                                                                             | 6 240   |
| Casing      | Back casing                |                                                                                    | aluminium alloy, 135*167*21.5mm,<br>English label print                                                                                                                                                                                       | SpeedFace-H5                                                                                                                | 6 240   |
| Main Board  | Main Board(IC)             |                                                                                    | SpeedFace H5 mainboard with IC<br>moduel                                                                                                                                                                                                      | SpeedFace-H5                                                                                                                | 74 880  |
| Main Board  | Main Board                 |                                                                                    | SpeedFace H5 mainboard                                                                                                                                                                                                                        | SpeedFace-V5                                                                                                                | 62 400  |
| PCB         | Full Light PCB             |                                                                                    | visible light LED and IR light LED<br>repare                                                                                                                                                                                                  | SpeedFace-V5                                                                                                                | 4 992   |
| Display     | 5inch TFT LCD              |                                                                                    | Color Display                                                                                                                                                                                                                                 | SpeedFace-V5                                                                                                                | 24 960  |
| Touch panel | 5inch touch panel          |                                                                                    | 5inch touch panel with zkteco logo                                                                                                                                                                                                            | SpeedFace-V5                                                                                                                | 12 480  |
| Casing      | Back casing                |                                                                                    | aluminium alloy, 135*167*21.5mm,<br>English label print                                                                                                                                                                                       | SpeedFace-V5                                                                                                                | 6 240   |
| Main Board  | Main Board(IC)             |                                                                                    | SpeedFace V5 mainboard with IC<br>moduel                                                                                                                                                                                                      | SpeedFace-V5                                                                                                                | 74 880  |

|                 |                                               |                                                                                     |                                                                          |                                                                                    |                |
|-----------------|-----------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------|------------------------------------------------------------------------------------|----------------|
| A&C Accessories | ZKBS Demo Kit B                               |    | 720*520*220mm<br>23kg                                                    | Speedface-V4L<br>EC10/inBio260 Pro<br>QR50/MK-H /MR1010<br>TLEB102<br>ES-852T12C-C | <b>681 408</b> |
| A&C Accessories | ZKBioSecurity Demo Kit B                      |    | 720*520*220mm<br>23kg                                                    |                                                                                    | <b>747 552</b> |
| A&C Accessories | ZKBioSecurity Aluminum case B                 |    | 720*520*221mm                                                            |                                                                                    | <b>212 160</b> |
| A&C Accessories | ZKBioSecurity Demo Kit A                      |    | 520*470*220mm<br>10kg                                                    |                                                                                    | <b>560 352</b> |
| A&C Accessories | ZKBioSecurity Aluminum case A                 |    | 520*470*221mm                                                            |                                                                                    | <b>149 760</b> |
| A&C Accessories | RS232/Wiegand Converter                       |                                                                                     | HDC09-232-WG66 DB9<br>75mm*41mm*23mm                                     |                                                                                    | <b>37 440</b>  |
| A&C Accessories | RS232/Wiegand Converter                       |                                                                                     | HDC09-WG-232 DB9 74*40*23mm<br>(Standard)                                |                                                                                    | <b>37 440</b>  |
| A&C Accessories | RS232/Wiegand Converter                       |                                                                                     | HDC09-232-WG66 DB9<br>75mm*41mm*23mm                                     |                                                                                    | <b>37 440</b>  |
| A&C Accessories | FR1500 single gang<br>[Metal Box]             |   | 116*70*50mm                                                              |                                                                                    | <b>4 992</b>   |
| A&C Accessories | FR1500 single gang<br>[Plastic Box]           |  | 120*75*42mm                                                              |                                                                                    | <b>1 872</b>   |
| A&C Accessories | 0303EMC_B Fingerprint<br>Sensor (Water Proof) |  | Use for MA300                                                            |                                                                                    | <b>31 200</b>  |
| A&C Accessories | SC300 main board /MF                          |  | Use for SCR100                                                           |                                                                                    | <b>24 960</b>  |
| A&C Accessories | Light pipe                                    |  | F7 Light pipe                                                            |                                                                                    | <b>250</b>     |
| A&C Accessories | F7<br>Keypad silicone                         |  | Use for SF200                                                            |                                                                                    | <b>250</b>     |
| A&C Accessories | F7 keypad (07088)                             |  | Use for SF200                                                            |                                                                                    | <b>624</b>     |
| A&C Accessories | SF200 TFT Screen                              |  | 2" color screen                                                          |                                                                                    | <b>14 976</b>  |
| A&C Accessories | F7_MAIN-V1.3-151224                           |  | Use for SF200                                                            |                                                                                    | <b>18 720</b>  |
| A&C Accessories | XAC-868 Acrylic lens (2.4<br>inches)          |  | Use for SF100                                                            |                                                                                    | <b>1 248</b>   |
| A&C Accessories | F4 Plastic keys(14020)                        |  | Use for SF100                                                            |                                                                                    | <b>562</b>     |
| A&C Accessories | F4 Interface Board/ID(A31)                    |  | Use for SF100                                                            |                                                                                    | <b>9 984</b>   |
| A&C Accessories | DC-DC Buck AC Adapter<br>IC                   |  | DC-DC Buck Powe IC SP6669AEK-<br>L 3.3V SMD SOT-25                       |                                                                                    | <b>624</b>     |
| A&C Accessories | Triode                                        |  | Triode NPN 160V 600mA 200mW<br>HFE=150-350<br>SMD SOT-23 MMBT5551LT1(G1) |                                                                                    | <b>125</b>     |
| A&C Accessories | Real-time clock module                        |  | Real-time clock module (ZT-<br>C08803A DIP8 module)                      |                                                                                    | <b>2 496</b>   |
| A&C Accessories | TVS Diodes                                    |  | TVS Diodes 28V 13.3A SMD<br>SMB/DO-214AA (SMBJ28A)                       |                                                                                    | <b>125</b>     |
| A&C Accessories | TVS Diodes                                    |  | TVS Diodes 15V 24.4A SMD<br>SMA/DO-214AC (SMAJ15CA)                      |                                                                                    | <b>125</b>     |




|                 |                            |                                                                                     |                                                  |  |        |
|-----------------|----------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------|--|--------|
| A&C Accessories | TVS Diodes                 |    | TVS Diodes 6V 38.8A SMD SMA/DO- 214AC (SMAJ6.0A) |  | 125    |
| A&C Accessories | Logic IC                   |    | Logic IC (74LVC08APW SMD TSSOP-14)               |  | 250    |
| A&C Accessories | Logic IC                   |    | Logic IC (74AHC14PW SMD TSSOP-14)                |  | 250    |
| A&C Accessories | Terminal Post              |    | 3.5mm 1*6pin 250V 8A (Black)                     |  | 499    |
| A&C Accessories | Terminal Post              |    | 3.5mm 1*5pin 250V 8A (Black)                     |  | 374    |
| A&C Accessories | Terminal Post              |    | 3.5mm 1*4pin 250V 8A (Black)                     |  | 312    |
| A&C Accessories | Terminal Post              |    | 3.5mm 1*3pin 250V 8A (Black)                     |  | 250    |
| A&C Accessories | Terminal Post              |    | 3.5mm 1*2pin 250V 8A (Black)                     |  | 250    |
| A&C Accessories | DC-DC Buck AC Adapter IC   |   | DC-DC Buck AC Adapter IC (TPS54331DR SMD SOIC-8) |  | 624    |
| A&C Accessories | Relay and buzzer           |  | Relay and buzzer (TX2-12V ATX203)                |  | 3 120  |
| A&C Accessories | Relay and buzzer           |  | Relay and buzzer (JS1-12V AJS1311) Panasonic DIP |  | 2 496  |
| A&C Accessories | RS485 Interface IC         |  | RS485 Interface IC (UM3085EESAR SMD SO-8 )       |  | 624    |
| A&C Accessories | SCM (Single Chip Micryoco) |  | SCM (PIC16F727-I/PT SMD TQFP-44)                 |  | 6 240  |
| A&C Accessories | ZEM565 Core Board          |  |                                                  |  | 49 920 |
| A&C Accessories | SR10E Front Casing         |  |                                                  |  | 3 744  |
| A&C Accessories | F18 finger print cradle    |  |                                                  |  | 312    |
| A&C Accessories | F18 Main Board / ID        |  |                                                  |  | 24 960 |
| A&C Accessories | F18 USB silicone           |  |                                                  |  | 312    |
| A&C Accessories | F18 Alarm cap              |  |                                                  |  | 312    |
| A&C Accessories | F18 plastic screen         |  |                                                  |  | 1 248  |
| A&C Accessories | F18 screen holder          |  |                                                  |  | 250    |
| A&C Accessories | F18 Light pipe             |  |                                                  |  | 312    |
| A&C Accessories | F18 Back Case              |  |                                                  |  | 2 496  |
| A&C Accessories | F18 Front case             |  |                                                  |  | 3 744  |
| A&C Accessories | FFC Cable                  |  |                                                  |  | 187    |

|                 |                                      |                                                                                     |                        |  |        |
|-----------------|--------------------------------------|-------------------------------------------------------------------------------------|------------------------|--|--------|
| A&C Accessories | 2.4" TFT                             |    |                        |  | 18 720 |
| A&C Accessories | ZK3300EMC Fingerprint Sensor         |    | ZK3300EMC-V1.4-140414  |  | 24 960 |
| A&C Accessories |                                      |    |                        |  | 312    |
| A&C Accessories | TF1700 Front Casing                  |    |                        |  | 4 992  |
| A&C Accessories | TF1700 Front Casing                  |    |                        |  | 4 368  |
| A&C Accessories | TF1700 main board / MF               |    |                        |  | 24 960 |
| A&C Accessories | Dual Plug Cable                      |    |                        |  | 624    |
| A&C Accessories | Dual Plug Cable                      |    |                        |  | 624    |
| A&C Accessories | Dual Plug Cable                      |   |                        |  | 624    |
| A&C Accessories | Dual Plug Cable                      |  |                        |  | 624    |
| A&C Accessories | TF1700 Lens                          |  |                        |  | 1 248  |
| A&C Accessories | TF1700 Back Casing                   |  |                        |  | 6 240  |
| A&C Accessories |                                      |  |                        |  | 624    |
| A&C Accessories | TF1700 Fingerprint Sensor Waterproof |  |                        |  | 1 248  |
| A&C Accessories | TF1700 Keypad silicone               |  |                        |  | 1 248  |
| A&C Accessories | USB Cover                            |  |                        |  | 1 248  |
| A&C Accessories | TF1700 Waterproof silicone           |  |                        |  | 250    |
| A&C Accessories | FFC CABLE                            |  |                        |  | 374    |
| A&C Accessories | FFC CABLE                            |  |                        |  | 374    |
| A&C Accessories | ZK3300_FFS Fingerprint Sensor        |  | ZK3300-FFS-V2.1-130830 |  | 24 960 |
| A&C Accessories | TF1700 Speaker Waterproof            |  |                        |  | 2 496  |
| A&C Accessories | TF1700 Key                           |  |                        |  | 12 480 |
| A&C Accessories | TF1700 Keyboard                      |  | TF1700_KEY-V1.0-110916 |  | 12 480 |
| A&C Accessories | Screw gaskets                        |  |                        |  | 125    |
| A&C Accessories | SCREWS                               |  | PWM2.5*8 (S922 SCREWS) |  | 250    |

|                   |                          |                                                                                             |                      |  |        |
|-------------------|--------------------------|---------------------------------------------------------------------------------------------|----------------------|--|--------|
| A&C Accessories   | Single Plug Cable        |            |                      |  | 374    |
| A&C Accessories   | Single Plug Cable        |            |                      |  | 374    |
| A&C Accessories   | Single Plug Cable        |            |                      |  | 374    |
| A&C Accessories   | Single Plug Cable        |            |                      |  | 374    |
| A&C Accessories   | Single Plug Cable        |            |                      |  | 374    |
| A&C Accessories   | Screw                    |            | TM3*5 screw          |  | 125    |
| A&C Accessories   | Fast Recovery Diodes     |            |                      |  | 125    |
| Single Plug Cable | Single Plug Cable        |                                                                                             |                      |  | 624    |
| Single Plug Cable | Single Plug Cable        |           |                      |  | 624    |
| A&C Accessories   | Single Plug Cable        |          |                      |  | 624    |
| A&C Accessories   | Single Plug Cable        |          |                      |  | 624    |
| A&C Accessories   | Single Plug Cable        |          |                      |  | 624    |
| A&C Accessories   | B06 MiFare moudle        |          |                      |  | 24 960 |
| A&C Accessories   | MB700 CAMERA COVERS      |          |                      |  | 624    |
| A&C Accessories   | Silicon Prisms           |          |                      |  | 2 496  |
| A&C Accessories   | Finger Print sensor 3300 |          |                      |  | 37 440 |
| A&C Accessories   | VF Series Camera         |          |                      |  | 37 440 |
| A&C Accessories   | TF1700 magnet            |          |                      |  | 1 248  |
| A&C Accessories   | F18 SILICON BUTTONS      |          |                      |  | 312    |
| A&C Accessories   | F18 Light barrier        |          |                      |  | 312    |
| A&C Accessories   | F18 KEY PAD BUTTONS      |          |                      |  | 1 248  |
| A&C Accessories   | MA300 BACK Casing        |          |                      |  | 12 480 |
| A&C Accessories   | F18 KEY PAD BOARD        |          |                      |  | 6 240  |
| A&C Accessories   | F18 TFT Module           |          |                      |  | 6 240  |
| A&C Accessories   | F18 SCREEN/ 2.4" TFT     |  | F18 SCREEN/ 2.4" TFT |  | 18 720 |



|                 |                                        |                                                                                     |                                                                                                                                                          |  |        |
|-----------------|----------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------|
| A&C Accessories | F17 BACK CASING                        |    |                                                                                                                                                          |  | 6 240  |
| A&C Accessories | FR1200 Interconnection Board           |    | (FR1200_ZLM30-V1.3-151023)                                                                                                                               |  | 37 440 |
| A&C Accessories | FR1200 ID Module                       |    | IDM202AW-V3(A09)                                                                                                                                         |  | 9 984  |
| A&C Accessories | FR1200 back panel                      |    |                                                                                                                                                          |  | 1 248  |
| A&C Accessories | FR1200 Front panel                     |    |                                                                                                                                                          |  | 1 248  |
| A&C Accessories | FR1200 Português User Manual (OEM)     |    |                                                                                                                                                          |  | 1 248  |
| A&C Accessories | FR1200 Color Box (OEM)                 |    |                                                                                                                                                          |  | 624    |
| A&C Accessories | FR1200 Container (OEM)                 |    |                                                                                                                                                          |  | 1 872  |
| A&C Accessories | SC103 Front panel                      |   |                                                                                                                                                          |  | 2 496  |
| A&C Accessories | SC103 back panel                       |  |                                                                                                                                                          |  | 2 496  |
| A&C Accessories | SC102 silica gel keypad                |  |                                                                                                                                                          |  | 624    |
| A&C Accessories | SC102 keypad                           |  |                                                                                                                                                          |  | 624    |
| A&C Accessories | SC100 keyboard plate                   |  |                                                                                                                                                          |  | 3 744  |
| A&C Accessories | the double head thrust line            |  |                                                                                                                                                          |  | 624    |
| A&C Accessories | HD_CAMERA2 Camera Moudle (Normal Lens) |                                                                                     |                                                                                                                                                          |  | 24 960 |
| A&C Accessories | ZK Optical Sensor (ZKV710P)            |  | ZK Fingerprint & Vein Sensor for FV18                                                                                                                    |  | 43 680 |
| A&C Accessories | ZK Optical Sensor (ZKV710P)            |  | ZK Fingerprint & Vein Sensor for FV350, inpluse+.                                                                                                        |  | 43 680 |
| A&C Accessories | ZK Optical Sensor (ZKV700P)            |  | ZK Fingerprint Sensor for V350, inpluse.                                                                                                                 |  | 37 440 |
| A&C Accessories | LS-POE-1220                            |  | PoE Splitter<br>LS-POE-1220 12V 2A                                                                                                                       |  | 14 976 |
| AC Adapter      | 12V/3A switching AC Adapter            |  | Manufacturer Part Number:A17010105<br>Plug to device: 90° , ϕ2.1mm<br>cable length: 1.8m                                                                 |  | 9 984  |
| AC Adapter      | 12V/3A switching AC Adapter            |  | Manufacturer Part Number: A17010092<br>Plug to device: 180° , ϕ2.1mm<br>cable length: 1.8m                                                               |  | 9 984  |
| AC Adapter      | ZKPSM030B                              |  | Spare parts for C3-100/200/400 Package B<br>AC Adapter for Controller with uninterrupted battery function<br>Input:110-240V AC, 50/60Hz                  |  | 18 720 |
| AC Adapter      | TPM003B                                |  | Spare parts for inBIO160 Package B<br>AC Adapter for Controller with uninterrupted battery function<br>Input:110-240V AC, 50/60Hz<br>Output: 13.8V/3A+1A |  | 18 720 |


|                |                   |                                                                                     |                                                                                                                                       |  |        |
|----------------|-------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|--|--------|
| AC Adapter     | TPM005B           |    | Spare parts for inBIO260/460 Package B<br>AC Adapter for Controller with uninterrupted battery function<br>Input:110-240V AC, 50/60Hz |  | 21 216 |
| Exit Button    | K2                |    | Non touch Exit Sensor with Remote Key<br>(Diffused Detection)<br>NO NC COM relay output<br>Size: 115L*70W(mm)                         |  | 14 976 |
| Exit Button    | K2S               |    | Non touch Exit Sensor with Remote Key(Diffused Detection)<br>NO NC COM relay output<br>Size: 86L*86W(mm)                              |  | 14 976 |
| Exit Button    | Remote Key        |    | Remote control for K2/K2S                                                                                                             |  | 7 488  |
| Other          | RM01              |    | 1. Relay Output Module<br>2. The driving voltage: DC 12V<br>3. Contact capacity: 10A 250VAC<br>10A 125VAC 10A 30VDC 10A               |  | 1 560  |
| USB Reader     | CR20E             |    | Read 125K proximity card number, USB interface                                                                                        |  | 12 480 |
| USB Reader     | CR20M             |                                                                                     | Read 13.56MHz mifare card number, USB interface                                                                                       |  | 18 720 |
| USB Reader     | CR20MW            |                                                                                     | Read and write 13.56MHz mifare card, USB interface                                                                                    |  | 32 448 |
| USB Reader     | CR10E             |   | Read 125K proximity card number, USB interface                                                                                        |  | 11 232 |
| USB Reader     | CR10M             |                                                                                     | Read 13.56MHz mifare card number, USB interface                                                                                       |  | 17 472 |
| USB Reader     | CR10MW            |                                                                                     | Read and write 13.56MHz mifare card, USB interface                                                                                    |  | 29 952 |
| Protection Box | Case 01 Metal Box |  | Metal Box for C3 Series control panel, including key, cables, iron plate etc.                                                         |  | 24 960 |
| Protection Box | Case 04 Metal Box |  | Metal Box for inBIO Series control panel, including LED indicator, key, cables, iron plate etc.                                       |  | 31 200 |
| Protection Box | WP01              |  | Protective Cover for TF1700/TF1600                                                                                                    |  | 6 240  |
| Protection Box | MA300 Cable Tray  |  | Metal Cable Tray for MA300 to install on walls that cannot drill holes.                                                               |  | 9 984  |
| Protection Box | MF7               |  | Metal Box for F7/F708/SF200                                                                                                           |  | 18 720 |
| Protection Box | ZF8               |  | Metal box for F8/F8-T                                                                                                                 |  | 18 720 |
| Protection Box | ACBox 05          |  | matal box for SpeedFace V5L                                                                                                           |  | 37 440 |
| Protection Box | ACBox 06          |  | Matel box for SpeedFace V5L-RFID                                                                                                      |  | 34 944 |
| Protection Box | MF2               |  | Metal box for F702-S/F703-S                                                                                                           |  | 18 720 |
| Main Board     | Main Board        |  | Used for C3-400                                                                                                                       |  | 71 136 |
| Main Board     | Main Board        |  | Used for C3-200                                                                                                                       |  | 52 416 |
| Main Board     | Main Board        |  | Used forC3-100                                                                                                                        |  | 31 200 |
| Main Board     | Main Board        |  | Used for Inbio160                                                                                                                     |  | 31 200 |

|                          |                                                       |                                                                                   |                                                                                                                                                                                                                                                                     |                                        |        |
|--------------------------|-------------------------------------------------------|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|--------|
| Main Board               | Main Board                                            |  | Used for Inbio 260                                                                                                                                                                                                                                                  |                                        | 52 416 |
| Main Board               | Main Board                                            |  | Used for Inbio 460                                                                                                                                                                                                                                                  |                                        | 87 360 |
| Access Control Accessory | Access Control Accessory Kit                          |  | What's in the box?<br>·Electric Magnetic lock :<br>1*X02117011 LMB-280L<br>1*X02116047 LM-2805<br>·Uninterruptible Power Supply<br>1*X01701046 PS902B (With backup battery)<br>·Touchless Exit:<br>1*X01501055 TLEB102<br>·Lock Bracket:                            | Suitable for all access control device | 49 920 |
| Access Control Accessory | Access Control Accessory Kit (Without backup battery) |  | What's in the box?<br>·Electric Magnetic lock :<br>1*X02117011 LMB-280L<br>1*X02116047 LM-2805<br>·Uninterruptible Power Supply:<br>1*X01701046 PS902B(Without backup battery)<br>·Touchless Exit:<br>1*X01501055 TLEB102<br>·Lock Bracket:<br>1*X02117012 LMB-280Z | Suitable for all access control device | 46 800 |



Прайс-лист на рентгентелевизионные установки


| Тип             | Модель   | Фото                                                                                | Параметры                                                                                                                                                                                                                                                                                                                                                                                                                         | Цена розница |
|-----------------|----------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| X-ray screening | LD5030   |    | 220/110 VAC +/- 10% / 60/50 Hz<br>Dimensions 1611 mm(L) * 1198mm(W)* 787 mm(H)<br>Tunnel Dimensions 507 mm(W) x 304 mm(H)<br>Package Size 1900mm(L) x 990mm(W) x 1485mm(H)<br>Package Weight 410KG °C °C<br>Pseudo color image ;<br>Operating Temperature:0 ~+40 ;<br>19inch screen display;<br>Steel Penetration 8mm<br>Wire Resolution 32 AWG                                                                                   | 4 742 400    |
| X-ray screening | ZKX5030A |   | 220/110 VAC +/- 10% / 60/50 Hz<br>Tunnel Dimensions 507 mm(W) x 304 mm(H)<br>Package Size 1900mm(L) x 990mm(W) x 1485mm(H)<br>Package Weight 410KG °C °C<br>Pseudo color image<br>Operating Temperature:0 ~+45 ;<br>17inch screen display;<br>Steel Penetration 8mm<br>Wire Resolution 34 AWG                                                                                                                                     | 5 616 000    |
| X-ray screening | ZKX5030C |  | 220/110 VAC +/- 10% / 60/50 Hz<br>Tunnel Dimensions 507 mm(W) x 304 mm(H)<br>Package Size 1900mm(L) x 990mm(W) x 1485mm(H)<br>Package Weight 450KG °C °C<br>Operating Temperature:0 ~+45 ;<br>17inch screen display;<br>Steel Penetration 32mm<br>Wire Resolution 38 AWG                                                                                                                                                          | 12 480 000   |
| X-ray screening | ZKX6040  |  | 220/110 VAC +/- 10% / 60/50 Hz<br>Input & Output Rollers<br>Bi-directional scanning,<br>Fingerprint login<br>Tunnel Dimensions 610 mm(W) x 420 mm(H)<br>Operating Temperature:0 ~+45 ;<br>21inch screen display;<br>Steel Penetration 35mm<br>Wire Resolution 38 AWG                                                                                                                                                              | 13 728 000   |
| X-ray screening | ZKX6040A |  | 220/110 VAC +/- 10% / 60/50 Hz<br>Package Dimensions (L*W*H):1990*990*1485 (mm)<br>Input & Output Rollers<br>Bi-directional scanning,<br>Fingerprint login<br>Tunnel Dimensions 610 mm(W) x 420 mm(H)<br>Operating Temperature:-10 ~+45<br>21.5 inch screen display<br>Steel Penetration 8mm<br>Wire Resolution 34 AWG                                                                                                            | 6 240 000    |
| X-ray screening | ZKX6550A |  | 220/110 VAC +/- 10% / 60/50 Hz (including console)<br>Pseudo color image,<br>Single screen console,<br>Bi-directional scanning,<br>Fingerprint login<br>Tunnel Dimensions 655 mm(W) x 505 mm(H)<br>Package Size 2240mm(L) x 1170mm(W) x 1755mm(H)<br>Package Weight 640KG12480 tr0KG (Console desk) °C °C<br>Pseudo color imageTemperature:0 ~+45 ;<br>21inch screen display;<br>Steel Penetration 10mm<br>Wire Resolution 38 AWG | 7 238 400    |


|                 |                   |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                   |
|-----------------|-------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|
| X-ray screening | <b>ZKX6550</b>    |    | <p>220/110 VAC +/- 10% / 60/50 Hz<br/>(including console)</p> <p>Single screen console,<br/>Bi-directional scanning,<br/>login</p> <p>Tunnel Dimensions 655 mm(W) x 505 mm(H)</p> <p>Operating Temperature:0 ~+45 ;</p> <p>21inch screen display;<br/>Steel Penetration 38mm<br/>Wire Resolution 40 AWG</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <b>14 976 000</b> |
| X-ray screening | <b>ZKX6550D</b>   |    | <p>220/110 VAC +/- 10% / 60/50 Hz<br/>(including console)</p> <p>Double screen console,<br/>Bi-directional scanning,<br/><b>Dual view</b> °C °C</p> <p>Fingerprint login</p> <p>Operating Temperature:0 ~+45 ;</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <b>24 960 000</b> |
| X-ray screening | <b>ZKX10080</b>   |    | <p>220/110 VAC +/- 10% / 60/50 Hz<br/>(including console)</p> <p>Double screen console,<br/>Bi-directional scanning,<br/>Fingerprint login</p> <p>Steel Penetration 34 mm °C °C</p> <p>Wire Resolution 38 AWG</p> <p>Operating Temperature:0 ~+45 ;</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>22 464 000</b> |
| X-ray screening | <b>ZKX10080D</b>  |   | <p>220/110 VAC +/- 10% / 60/50 Hz<br/>(including console)</p> <p>Double screen console,<br/><b>Dual view screening</b></p> <p>Bi-directional scanning, °C °C</p> <p>Fingerprint login</p> <p>Operating Temperature:0 ~+45 ;</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <b>34 944 000</b> |
| X-ray screening | <b>ZKX100100</b>  |  | <p>220/110 VAC +/- 10% / 60/50 Hz<br/>(including console)</p> <p>Double screen console,<br/>Bi-directional scanning,<br/>Fingerprint login</p> <p>Steel Penetration 34 mm °C °C</p> <p>Wire Resolution 38 AWG</p> <p>Operating Temperature:0 ~+45 ;</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>24 960 000</b> |
| X-ray screening | <b>ZKX100100D</b> |  | <p>220/110 VAC +/- 10% / 60/50 Hz<br/>(including console)</p> <p>Double screen console,<br/><b>Dual view screening</b></p> <p>Bi-directional scanning, °C °C</p> <p>Fingerprint login</p> <p>Operating Temperature:0 ~+45 ;</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <b>37 440 000</b> |
| X-ray screening | <b>BLADE6040</b>  |  | <p>220/110 VAC +/- 10% / 60/50 Hz<br/>(white)</p> <p>Tunnel Dimensions(WxH) : 610 × 420 mm</p> <p><b>Conveyor Speed : 0.20 m/sec.<br/>~0.40m/sec</b></p> <p>Load on Conveyor: Max 200 kg. (Evenly Distributed)</p> <p>Space</p> <p>Defintion : HorizontalΦ1.0mm,VerticalΦ2.0mm</p> <p>Steel Penetration: 38mm Guaranteed;<br/>40mm Typical</p> <p>Wire Resolution: 38AWG Guaranteed;<br/>40AWG Typical</p> <p>Dual-energy detector: Yes</p> <p>Number of Colors in X-ray Image: 3</p> <p>Dimensions(LxWxH) : 1990 × 970 × 1320 mm</p> <p>Package Dimensions(LxWxH):<br/>1987.5*1023.9*1317mm</p> <p>Package Weight: 750kg</p> <p>Operating Temperature: -10°C to +45°C</p> <p>Storage Temperature: -20°C to +60°C</p> <p>Humidity: 5-95%, non condensing</p> <p>AC Adapter Consumption: 700W</p> <p>Sound Pressure: &lt;51.8dB (A)</p> <p>X-ray Generator</p> | <b>17 472 000</b> |

|                 |           |                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |            |
|-----------------|-----------|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| X-ray screening | BLADE6040 |  | 220/110 VAC +/- 10% / 60/50 Hz<br>(black)<br>Tunnel Dimensions(WxH) : 610 × 420 mm<br>Conveyor Speed : 0.20 m/sec.<br>~0.40m/sec<br>Load on Conveyor: Max 200 kg. (Evenly Distributed)<br>Space<br>Defintion : HorizontalΦ1.0mm,VerticalΦ2.0mm<br>Steel Penetration: 38mm Guaranteed; 40mm Typical<br>Wire Resolution: 38AWG Guaranteed; 40AWG Typical<br>Dual-energy detector: Yes<br>Number of Colors in X-ray Image: 3<br>Dimensions(LxWxH) : 1990 × 970 × 1320 mm<br>Package Dimensions(LxWxH): 1987.5*1023.9*1317mm<br>Package Weight: 750kg<br>Operating Temperature: -10°C to +45°C<br>Storage Temperature: -20°C to +60°C<br>Humidity: 5-95%, non condensing<br>AC Adapter Consumption: 700W<br>Sound Pressure: <51.8dB (A)<br>X-ray Generator | 17 472 000 |
|-----------------|-----------|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|





Прайс на комплектующие рентгентелевизионных установок

| Тип              | Модель                    | Фото                                                                                | Параметры                                            | Совместимое устройство                                                                                           | Цена розница |
|------------------|---------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|--------------|
| Electric parts   | X-ray control board       |    | XRAY_AC_CTRL-V2.0-181108                             | ZKX5030A (after June, 2020) ZKX5030C (after June, 2020) ZKX6040, ZKX6550D, ZKX10080D ZKX100100D                  | 87 360       |
| Electric parts   | Miniature Circuit Breaker |    | CDBK C type 2P 10A<br>80mm*78.5mm*35.4mm             | ZKX5030A, ZKX5030C, ZKX6040, ZKX6550A, ZKX6550, ZKX6550D, ZKX10080, ZKX10080D, ZKX100100, ZKX100100D             | 3 744        |
| Electric parts   | Fuse                      |   | RT14 10A φ10mm*38mm                                  | ZKX5030A, ZKX5030C, ZKX6040, ZKX6550A, ZKX6550, ZKX6550D, ZKX10080, ZKX10080D, ZKX100100, ZKX100100D             | 1 248        |
| Electric parts   | Fuse base                 |  | RT18-32 1P 63mm*79mm*18mm                            | ZKX5030A, ZKX5030C, ZKX6040, ZKX6550A, ZKX6550, ZKX6550D, ZKX10080, ZKX10080D, ZKX100100, ZKX100100D             | 1 248        |
| AC Adapter       | AC Adapter 050            |  | 12v/5A                                               | ZKX5030A, ZKX5030C, ZKX6040, ZKX6550A, ZKX6550, ZKX6550D, ZKX10080, ZKX10080D, ZKX100100, ZKX100100D             | 37 440       |
| AC Adapter       | AC Adapter (ZKTeco logo)  |  | TPM003(12V/3A)                                       | ZKX5030A, ZKX5030C, ZKX6040, ZKX6550A, ZKX6550, ZKX6550D, ZKX10080, ZKX10080D, ZKX100100, ZKX100100D             | 9 984        |
| X-ray protection | Emergency button          |  | LAY5-BS542 normally closed φ40mm<br>40mm*29mm*79.5mm | ZKX5030A, ZKX5030C, ZKX6040, ZKX6550A, ZKX6550, ZKX6550D, ZKX10080, ZKX10080D, ZKX100100, ZKX100100D             | 2 496        |
| X-ray protection | Emergency button shell    |  | yellow φ22mm 56mm*48mm*40.2mm                        | ZKX5030A, ZKX5030C, ZKX6040, ZKX6550A, ZKX6550, ZKX6550D, ZKX10080, ZKX10080D, ZKX100100, ZKX100100D             | 1 248        |
| X-ray protection | X-ray safety interlock    |  | LXW5-11M 50mm*18mm*54mm                              | ZKX5030A, ZKX5030C, ZKX6040, ZKX6550A, ZKX6550, ZKX6550D, ZKX10080, ZKX10080D, ZKX100100, ZKX100100D             | 2 496        |
| Electric parts   | Indicator (red)           |  | DC12V φ30*13 φ20*38 (LD1122D21J4)                    | ZKX5030A, ZKX5030C, ZKX6040, ZKX6550A, ZKX6550, ZKX6550D, ZKX10080, ZKX10080D, ZKX100100, ZKX100100D             | 1 248        |
| Electric parts   | Indicator (green)         |  | DC12V φ30*13 φ20*38 (LD1122D21J3)                    | ZKX5030A, ZKX5030C, ZKX6040, ZKX6550A, ZKX6550, ZKX6550D, ZKX10080, ZKX10080D, ZKX100100, ZKX100100D             | 1 248        |
| Electric parts   | Infrared sensor           |  | E3Z-T81, PNP,2M                                      | ZKX5030A, ZKX5030C, ZKX6040, ZKX6550A, ZKX6550, ZKX6550D, ZKX10080, ZKX10080D, ZKX100100, ZKX100100D             | 43 680       |
| Electric parts   | Ethernet cable            |  | RV-1.5mm <sup>2</sup>                                | ZKX5030A, ZKX5030C, ZKX6040, ZKX6550A, ZKX6550, ZKX6550D, ZKX10080, ZKX10080D, ZKX100100, ZKX100100D             | 1 498        |
| Board            | Data acquisition board    |  | Hamamatsu                                            | ZKX5030A (old), ZKX5030C, ZKX6040, ZKX6550A (old), ZKX6550, ZKX6550D, ZKX10080, ZKX10080D, ZKX100100, ZKX100100D | 624 000      |

|                  |                                   |                                                                                     |                                                                                                     |                                                                                                      |           |
|------------------|-----------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|-----------|
| Computer         | Industrial motherboard AC Adapter |    | HKA06012050-7C 12V/5A                                                                               | ZKX5030A, ZKX5030C, ZKX6040, ZKX6550A, ZKX6550, ZKX6550D, ZKX10080, ZKX10080D, ZKX100100, ZKX100100D | 18 720    |
| Computer         | Industrial computer hard disk     |    | SYS8F377VGGA-OM If need to install X-ray software in hard disk, need to note when placing an order. | ZKX5030A, ZKX5030C, ZKX6040, ZKX6550A, ZKX6550, ZKX6550D, ZKX10080, ZKX10080D, ZKX100100, ZKX100100D | 99 840    |
| Computer         | Industrial computer motherboard   |    | SYS8F377VGGA-OM(with cables)                                                                        | ZKX5030A , ZKX5030C ,ZKX6040, ZKX6550A, ZKX6550                                                      | 374 400   |
| Electric parts   | Cooling fan(220V)                 |    | Supply for 220V                                                                                     | ZKX5030A, ZKX5030C, ZKX6040, ZKX6550A, ZKX6550, ZKX6550D, ZKX10080, ZKX10080D, ZKX100100, ZKX100100D | 12 480    |
| Electric parts   | Cooling fan(110V)                 |    | Supply for 110V                                                                                     | ZKX5030A, ZKX5030C, ZKX6040, ZKX6550A, ZKX6550, ZKX6550D, ZKX10080, ZKX10080D, ZKX100100, ZKX100100D | 12 480    |
| Electric parts   | Anti dust fan cover               |   | 125*125mm black                                                                                     | ZKX5030A, ZKX5030C, ZKX6040, ZKX6550A, ZKX6550, ZKX6550D, ZKX10080, ZKX10080D, ZKX100100, ZKX100100D | 1 248     |
| Board            | Dual energy X-ray detection board |  | Hamamatsu<br>Two layer sensor,<br>Dual energy                                                       | ZKX5030C, ZKX6040, ZKX6550, ZKX6550D, ZKX10080, ZKX10080D, ZKX100100, ZKX100100D                     | 374 400   |
| X-ray source     | X ray generator (220V )           |  | 80KV,0.6mA 220V                                                                                     | ZKX5030A, ZKX6550A                                                                                   | 1 360 320 |
| X-ray source     | X-ray generator14003 ( 220V)      |  | 140KV,0.3mA 220V                                                                                    | ZKX5030C                                                                                             | 2 745 600 |
| Computer         | Wireless mouse and keyboard       |  | Logtech MK245 Nano (black)                                                                          | ZKX5030A, ZKX5030C                                                                                   | 31 200    |
| Conveyor         | 48V DC motor                      |  | 48V 100W                                                                                            | ZKX5030A, ZKX5030C                                                                                   | 258 336   |
| Conveyor         | 5030 Roller                       |  | diameter 50mm                                                                                       | ZKX5030A, ZKX5030C                                                                                   | 14 976    |
| Conveyor         | 48V Motor controller              |  | 48V DGBL                                                                                            | ZKX5030A, ZKX5030C                                                                                   | 53 664    |
| Conveyor         | AC motor controller               |  | For triple-phase motor                                                                              | ZKX6550A, ZKX6550, ZKX6550D, ZKX10080, ZKX10080D, ZKX100100, ZKX100100D                              | 0         |
| Conveyor         | 5030 Belt 01                      |  | T2.0*W415*L3420mm used in machine which shipped after October,2017                                  | ZKX5030A, ZKX5030C                                                                                   | 62 400    |
| Conveyor         | 5030 Belt 02                      |  | used in machine which shipped before October,2017                                                   | ZKX5030A, ZKX5030C                                                                                   | 62 400    |
| X-ray protection | 5030 Lead curtain                 |  | ONE FULL PIECE<br>326mm*50mm*2mm                                                                    | ZKX5030A, ZKX5030C                                                                                   | 1 248     |



|                         |                                         |                                                                                     |                                                      |                                                                                           |                  |
|-------------------------|-----------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------|-------------------------------------------------------------------------------------------|------------------|
| <b>X-ray protection</b> | <b>5030 Lead curtain</b>                |    | HALF PIECE<br>326mm*28mm*2mm                         | ZKX5030A, ZKX5030C                                                                        | <b>1 248</b>     |
| <b>Mechanical parts</b> | <b>5030 Baggage hold table</b>          |    | stainless with roller                                | ZKX5030A, ZKX5030C                                                                        | <b>124 800</b>   |
| <b>AC Adapter</b>       | <b>48V AC Adapter</b>                   |    | 48V/3A, supply for the motor                         | ZKX5030A, ZKX5030C                                                                        | <b>43 680</b>    |
| <b>Electric parts</b>   | <b>5030 Start button (green)</b>        |    | LAY5-BG21 φ28mm 40mm*29mm*89mm                       | ZKX5030A, ZKX5030C                                                                        | <b>2 496</b>     |
| <b>Electric parts</b>   | <b>5030 Rotary switch</b>               |    | LAY5-BA31 normally open φ29mm<br>40mm*29mm*55mm      | ZKX5030A, ZKX5030C                                                                        | <b>2 496</b>     |
| <b>Display</b>          | <b>LED monitor</b>                      |   | Dell/17-inch, 4:3 screen                             | ZKX5030A, ZKX5030C                                                                        | <b>224 640</b>   |
| <b>X-ray source</b>     | <b>X-ray generator 140</b>              |  | 140KV 0.5mA used in machine which shipped after 2019 | ZKX6550, ZKX6550D                                                                         | <b>2 745 600</b> |
| <b>X-ray source</b>     | <b>X-ray generator 150</b>              |  | 150KV 0.8mA                                          | ZKX6040                                                                                   | <b>2 745 600</b> |
| <b>Electric parts</b>   | <b>The keyboard board</b>               |  | used in machine which shipped after 2019             | ZKX6550A, ZKX6040,<br>ZKX6550, ZKX6550D,<br>ZKX10080, ZKX10080D,<br>ZKX100100, ZKX100100D | <b>24 960</b>    |
| <b>Electric parts</b>   | <b>The keyboard board</b>               |  | XRAY_KEY-V2.3-170616                                 | ZKX6550A, ZKX6550,<br>ZKX6550D, ZKX10080,<br>ZKX10080D, ZKX100100,<br>ZKX100100D          | <b>24 960</b>    |
| <b>Electric parts</b>   | <b>The key switch</b>                   |                                                                                     | 19mm                                                 | ZKX6040, ZKX6550A,<br>ZKX6550, ZKX6550D,<br>ZKX10080, ZKX10080D,<br>ZKX100100, ZKX100100D | <b>2 496</b>     |
| <b>Electric parts</b>   | <b>SilkID Fingerprint reader</b>        |  |                                                      | ZKX6040, ZKX6550A,<br>ZKX6550, ZKX6550D,<br>ZKX10080, ZKX10080D,<br>ZKX100100, ZKX100100D | <b>24 960</b>    |
| <b>Electric parts</b>   | <b>Touchpad mouse</b>                   |  |                                                      | ZKX6040, ZKX6550A,<br>ZKX6550, ZKX6550D,<br>ZKX10080, ZKX10080D,<br>ZKX100100, ZKX100100D | <b>12 480</b>    |
| <b>Conveyor</b>         | <b>6550 AC motor</b>                    |  | used in machine which shipped after 2019             | ZKX6550A, ZKX6550                                                                         | <b>665 184</b>   |
| <b>Conveyor</b>         | <b>6550 AC motor</b>                    |  | 220V                                                 | ZKX6550A, ZKX6550                                                                         | <b>665 184</b>   |
| <b>Conveyor</b>         | <b>6550 Directional variable roller</b> |  |                                                      | ZKX6550A, ZKX6550                                                                         | <b>72 384</b>    |
| <b>Conveyor</b>         | <b>6550 table Roller</b>                |  |                                                      | ZKX6550A, ZKX6550                                                                         | <b>16 224</b>    |



|                  |                                     |                                                                                     |                                                      |                                                                                                                |           |
|------------------|-------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|-----------|
| Conveyor         | 6550 Belt                           |    | PVC 4380*618*3mm                                     | ZKX6550A, ZKX6550                                                                                              | 93 600    |
| X-ray protection | 6550 lead curtain A                 |    | ONE FULL PIECE<br>520*50*2mm                         | ZKX6550A, ZKX6550                                                                                              | 1 248     |
| X-ray protection | 6550 lead curtain B                 |    | HALF PIECE<br>520*30*2mm                             | ZKX6550A, ZKX6550                                                                                              | 1 248     |
| Mechanical parts | 6650 baggage hold table             |    | the new version(SUS304<br>740*600*1200mm )           | ZKX6550A, ZKX6550                                                                                              | 224 640   |
| Display          | 21 inch LED monitor                 |    | LenovoL 22E-30 HDMI 21.5 Inchs                       | ZKX6040, ZKX6550A,<br>ZKX6550, ZKX6550D,<br>ZKX10080, ZKX10080D,<br>ZKX100100, ZKX100100D<br>After August 2021 | 237 120   |
| X-ray source     | X-ray generator                     |   | 160KV 0.8mA digital X-ray source 220V                | ZKX10080, ZKX100100                                                                                            | 2 995 200 |
| Computer         | Industrial computer                 |                                                                                     | I3, 4G DDR3 64G SSD 1T hard drive<br>2G graphic card | ZKX6550D, ZKX10080,<br>ZKX10080D, ZKX100100,<br>ZKX100100D                                                     | 1 123 200 |
| Board            | Data acquisition board              |  | SUNFYTECH                                            | ZKX5030A (new), ZKX6550A (new)                                                                                 | 249 600   |
| Board            | Single energy X-ray detection board |  | SUNFYTECH<br>One layer sensor,<br>Single energy      | ZKX5030A (new), ZKX6550A (new)                                                                                 | 93 600    |
| Electric parts   | Infrared sensor                     |  | PM18T-2PD, M18*1mm, length:61mm                      | ZKX5030A(After May 2022)<br>ZKX5030C(After May 2022)<br>ZKX6040A                                               | 24 960    |

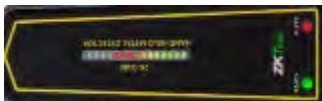
Прайс-лист на металлодетекторы


| Тип                         | Модель   | Фото                                                                                | Параметры                                                                                                                                                                                                                                                                                                                                                                                                 | Цена розница |
|-----------------------------|----------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| Hand Held Metal Detector    | ZK-D100S |    | Device Dimension: 410(L)×85(W)×45(H)mm<br>Power: 9V Battery                                                                                                                                                                                                                                                                                                                                               | 12 355       |
| Hand Held Metal Detector    | ZK-D100S |    | Device Dimension: 410(L)×85(W)×45(H)mm<br>Power: <b>Rechargeable 9V Ni-MH Battery, DC charger</b><br><b>European Standard</b>                                                                                                                                                                                                                                                                             | 24 835       |
| Hand Held Metal Detector    | ZK-D100S |    | Device Dimension: 410(L)×85(W)×45(H)mm<br>Power: <b>Rechargeable 9V Ni-MH Battery, DC charger</b><br><b>USA Standard</b>                                                                                                                                                                                                                                                                                  | 24 835       |
| Hand Held Metal Detector    | ZK-D100S |    | Device Dimension: 410(L)×85(W)×45(H)mm<br>Power: <b>Rechargeable 9V Ni-MH Battery, DC charger</b><br><b>British Standard</b>                                                                                                                                                                                                                                                                              | 24 835       |
| Hand Held Metal Detector    | ZK-D160  |   | Dimensions : 400(L) * 72(W) * 26(H)mm<br>Dimension with Packing: 405(L) * 76(W) * 30(H)mm<br>Weight with Packing: 360g                                                                                                                                                                                                                                                                                    | 12 355       |
| Hand Held Metal Detector    | ZK-D160  |  | Dimensions : 400(L) * 72(W) * 26(H)mm<br>Dimension with Packing: 500(L) * 76(W) * 35(H)mm<br>Weight with Packing: 390g<br><b>2*AA Ni-MH batteries, DC charger European</b>                                                                                                                                                                                                                                | 24 835       |
| Hand Held Metal Detector    | ZK-D160  |  | Dimensions : 400(L) * 72(W) * 26(H)mm<br>Dimension with Packing: 500(L) * 76(W) * 35(H)mm<br>Weight with Packing: 390g<br><b>2*AA Ni-MH batteries, DC charger USA</b>                                                                                                                                                                                                                                     | 24 835       |
| Hand Held Metal Detector    | ZK-D160  |  | Dimensions : 400(L) * 72(W) * 26(H)mm<br>Dimension with Packing: 500(L) * 76(W) * 35(H)mm<br>Weight with Packing: 390g<br><b>2*AA Ni-MH batteries, DC charger British</b>                                                                                                                                                                                                                                 | 24 835       |
| Hand Held Metal Detector    | ZK-D180  |  | Visualize metal detection indicator<br>Device Dimension: 345(L)×69(W)×25(H)mm<br>Power: <b>Rechargeable 9V Ni-MH Battery, DC charger</b>                                                                                                                                                                                                                                                                  | 31 200       |
| Hand Held Metal Detector    | ZK-D180  |  | Visualize metal detection indicator<br>Device Dimension: 345(L)×69(W)×25(H)mm<br>Power: <b>Rechargeable 9V Ni-MH Battery, DC charger</b>                                                                                                                                                                                                                                                                  | 31 200       |
| Hand Held Metal Detector    | ZK-D180  |  | Visualize metal detection indicator<br>Device Dimension: 345(L)×69(W)×25(H)mm<br>Power: <b>Rechargeable 9V Ni-MH Battery, DC charger</b>                                                                                                                                                                                                                                                                  | 31 200       |
| Hand Held Metal Detector    | ZK-D300  |  | Visualize metal detection indicator<br>Device Dimension:<br>360(L)×82.5(W)×42.5(H)mm<br>Power: <b>Rechargeable Battery, 5V USB charger</b><br><b>European Standard</b>                                                                                                                                                                                                                                    | 39 936       |
| Hand Held Metal Detector    | ZK-D300  |  | Visualize metal detection indicator<br>Device Dimension:<br>360(L)×82.5(W)×42.5(H)mm<br>Power: <b>Rechargeable Battery, 5V USB charger</b><br><b>British Standard</b>                                                                                                                                                                                                                                     | 39 936       |
| Hand Held Metal Detector    | ZK-D300  |  | Visualize metal detection indicator<br>Device Dimension:<br>360(L)×82.5(W)×42.5(H)mm<br>Power: <b>Rechargeable Battery, 5V USB charger</b><br><b>USA Standard</b>                                                                                                                                                                                                                                         | 39 936       |
| Walk Through Metal Detector | ZK-D4330 |  | Detecting Zones: 33 zones<br>7 inch LCD display<br>Input Voltage: DC15V<br>LED indicators: four LED light bars<br>Sensitivity Level: 500<br>Package Dimensions(mm):2300 (H) x 335(W) x 800 (D)<br>Gross Weight:70 kg<br>Networking(TCP/IP):standard<br>Wooden frame packing: standard<br>Touch Panel: standard<br>4H Backup Battery: 37440 тг<br>8H Backup Battery: 62400 тг<br>Universal wheel: 62400 тг | 1 296 672    |

|                                      |             |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                    |           |
|--------------------------------------|-------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| Walk Through Metal Detector          | AMD600      |    | <p>6 detection zones<br/>PVC material<br/>256 sensitivity levels<br/>3.5" LCD display<br/>Input Voltage: DC12V<br/>Working Current: 1.5A (max)<br/>Running Power: 18W (max)<br/>Dimension (L * W * H): 520 * 816 * 2218 (mm)<br/>Weight :50 kg<br/>Wooden frame packing: 37440 tr</p>                                                                                                              | 312 000   |
| Walk Through Metal Detector          | ZK-D1065    |    | <p>Power Supply: AC100V ~ 240V<br/>Working Temperature: -20°C ~ 55°C<br/>Working Humidity: &lt;95% (non-condensing)<br/>Working Frequency: 5.7KHz ~ 9.6KHz<br/>Input Voltage: DC12V<br/>Working Current: 1.4A<br/>Running Power: 16W<br/>Packing Dimension (H*W*L): 2282 * 612 * 238 (mm)<br/>Weight with Packing: 40kg<br/>Wooden frame packing: 37440 tr</p>                                     | 312 000   |
| Walk Through Metal Detector          | ZK-D2180    |   | <p>Zone:18<br/>Power Supply: AC100V ~ 240V<br/>Working Temperature: -20°C ~ 55°C<br/>Working Frequency: 5.7KHz ~ 9.6KHz<br/>Input Voltage: DC12V<br/>Working Current: 1.5A<br/>Running Power: 18W<br/>Packing Dimension (H*W*L): 2282 * 612 * 238 (mm)<br/>Weight with Packing: 50kg<br/>TCP/IP communication/APP<br/>Remote control<br/>Linkage with turnstile</p>                                | 349 440   |
| Walk Through Metal Detector          | ZK-D3180    |  | <p>Zone:18<br/>Power Supply: AC100V ~ 240V<br/>Working Temperature: -20°C ~ 55°C<br/>Working Frequency: 5.7KHz ~ 9.6KHz<br/>Input Voltage: DC12V<br/>Working Current: 1.2A<br/>Running Power: 14W<br/>Packing Dimension (H*W*L): 2280*347*660 (mm)<br/>Weight with Packing: 52kg<br/>TCP/IP communication/APP<br/>Remote control<br/>Linkage with turnstile<br/>Wooden frame packing: 37440 tr</p> | 499 200   |
| Walk Through Metal Detector          | AMD1800 Pro |  | <p>Zone:18<br/>Ingress Protection: IP65<br/>Power Supply: AC100V ~ 240V<br/>Working Temperature: -20°C ~ 55°C<br/>Working Frequency: 5.7KHz ~ 9.6KHz<br/>Input Voltage: DC12V<br/>Working Current: 1.5A<br/>Running Power: 18W<br/>Packing Dimension (L*W*H): 2285*260*615 (mm)<br/>Weight with Packing: 73kg<br/>TCP/IP communication/APP<br/>Remote control Linkage with turnstile</p>           | 599 040   |
| Portable Pole Metal Detector         | MDS100      |  | <p>Zone: 2<br/>Working Temperature: -10°C ~ 60°C<br/>Input Voltage: DC15V<br/>Battery Capacity : 10000mAh<br/>Sensitivity Level : 100<br/>Ingress Protection: IPX5<br/>Touch Screen Size: 3.5"<br/>Dimension (H*W*L): 361 * 380 * 1969 (mm)<br/>Packing Dimension (H*W*L): 2380*470*545 (mm)<br/>Packing weight: 40kg</p>                                                                          | 1 872 000 |
| Walk Through Metal Detector          | ZK-MD6000   |  | <p>Zone:33<br/>Power Supply: AC100V ~ 240V<br/>Working Temperature: -20°C ~ 55°C<br/>29 inches screen<br/>Thermal Imaging:standard<br/>Video surveillance:standard<br/>Android platform<br/>500 sensitivity levels</p>                                                                                                                                                                             | 2 246 400 |
| Metal Detection Integrated Turnstile | ZK-MD6000S  |  | <p>Zone:33<br/>Power Supply: AC100V ~ 240V<br/>Working Temperature: -20°C ~ 55°C<br/>29 inches screen<br/>Entrance control:standard<br/>Thermal Imaging:standard<br/>Video surveillance:standard<br/>Face and card verification:standard<br/>Gas detection:standard<br/>Android platform<br/>500 sensitivity levels</p>                                                                            | 6 240 000 |




|                                         |           |                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                        |
|-----------------------------------------|-----------|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|
| Metal Detection<br>Integrated Turnstile | Cronus    |  | Power supply:100-240V,50/60Hz<br>Relative Humidity :<93% (non-condensing)<br>Working Temperature : 0°C to 45°C<br><b>Zone: 15 zones</b><br>Work Frequency: 5.7kHz - 9.6kHz<br>Sensitivity : 256 level<br><b>Motor : Brushless DC</b><br>Swing Barrier Infrared Sensor: 7 pairs<br>Walk-Through Metal Detector Infrared Sensor:<br>2 pairs<br><b>Working Environment : Indoor-use ONLY</b><br>Package dimension(H*W*L ): 1900*700*2000 | <b>11 856 000</b>                                      |
| Software                                | ZKBio SIS |  | Base On ZKBio Security CV6600<br>Central Manage Security Products<br>Data Display Platform<br>Real-time Monitoring<br>Device Management<br>Reports                                                                                                                                                                                                                                                                                    | <b>374400 (10 дверей)</b><br><b>998400 (30 дверей)</b> |

| Прайс-лист на комплектующие металлодетекторов |                                                       |                                                                                     |                                                            |                                                                                               |              |
|-----------------------------------------------|-------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------|-----------------------------------------------------------------------------------------------|--------------|
| Тип                                           | Модель                                                | Фото                                                                                | Параметры                                                  | Совместимое устройство                                                                        | Цена розница |
| Buzzer                                        | Buzzer<br>(蜂鸣器)                                       |    | SQPB4216W2824B<br>3—24V 65mA 2800Hz±<br>500 100dB Φ42*16mm | ZK-D1010S,ZK-D1065S,ZK-D2180S,ZK-D3180S,ZK-D1065,ZK-D2180,AMD600                              | 811          |
| Sensor                                        | The module of Infrared<br>Correlation Tube<br>红外对射管组件 |    | Transmitter and receiver                                   | ZK-D1065, ZK-D2180, ZK-D3180,<br>ZK-D3180S, ZK-D4330,<br>AMD600, AMD1800 Pro                  | 3 744        |
| Battery                                       | Backup Battery<br>6000mAh                             |    | 6000mAh                                                    | ZK-D1065S,ZK-D2180S,ZK-D3180S, ZK-D4330                                                       | 32 448       |
| Battery                                       | Backup Battery<br>10000Amh                            |    | 10000mAh                                                   | ZK-D1065S, ZK-D2180S, ZK-D3180S, ZK-D1065, ZK-D2180,<br>ZK-D3180, AMD600, ZK-D4330            | 57 408       |
| Remote Control                                | Remote Control<br>遥控器                                 |  | Eight keys<br>87*40*7mm                                    | ZK-D2180, ZK-D3180, ZK-D4330, AMD1800Pro                                                      | 1 997        |
| Bolt                                          | Threaded Bolt<br>内六角大头螺栓                              |  | Φ40mm                                                      | ZK-D1010S, ZK-D1065S, ZK-D2180S, ZK-D3180S, ZK-D1065, ZK-D2180, AMD600, ZK-D3180, AMD1800 Pro | 686          |
| Footcover                                     | Footcover<br>脚套                                       |  | ABS 580*80*66mm                                            | ZK-D1065S, ZK-D2180S, ZK-D3180S, ZK-D2180, ZK-D3180                                           | 2 933        |
| Coping                                        | Coping<br>顶盖                                          |  | ABS 510*61*20mm                                            | ZK-D1065S, ZK-D2180S, ZK-D3180S, ZK-D2180, ZK-D3180                                           | 1 248        |
| Battery                                       | Ni-MH Battery<br>(Chargeable Battery)<br>镍氢电池         |  | MH-22FP 9V 250mAh<br>26.5mm*17.5mm*48.5mm                  | ZK-D100,ZK-D180                                                                               | 6 240        |
| Charger                                       | Charger<br>(U.S.A Standard)<br>充电器 (美标)               |  | 12V/1A(For Hand<br>Held Metal Detector)                    | ZK-D100,ZK-D180                                                                               | 6 240        |
| Charger                                       | Charger<br>(British Standard)<br>充电器 (英标)             |  | 12V/1A(For Hand<br>Held Metal Detector)                    | ZK-D100,ZK-D180                                                                               | 6 240        |
| Charger                                       | Charger<br>(European Standard)<br>充电器 (欧标)            |  | 12V/1A(For Hand<br>Held Metal Detector)                    | ZK-D100,ZK-D180                                                                               | 6 240        |
| Charger                                       | Charger<br>(Chinese Standard)<br>充电器 (国标)             |  | 12V/1A(For Hand<br>Held Metal Detector)                    | ZK-D100,ZK-D180                                                                               | 6 240        |
| Sticker                                       | lower Cover Sticker<br>(下盖标签面膜)                       |  |                                                            | ZK-D180                                                                                       | 1 498        |
| Sticker                                       | Upper Cover Sticker<br>(上盖标签面膜)                       |  |                                                            | ZK-D180                                                                                       | 1 498        |
| Shell                                         | ZK-D4330<br>Mainboard shell(A)<br>主机壳 (A)             |  | Light grey                                                 | ZK-D4330                                                                                      | 1 498        |
| Shell                                         | ZK-D4330<br>Mainboard shell(B)<br>主机壳 (B)             |  | Light grey                                                 | ZK-D4330                                                                                      | 1 622        |
| Panel                                         | ZK-D4330<br>Acrylic panel(B)<br>亚克力 (B)               |  | Light grey and black                                       | ZK-D4330                                                                                      | 998          |

|           |                                          |                                                                                     |                                                 |                    |               |
|-----------|------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------|--------------------|---------------|
| Keypad    | ZK-D4330<br>Silicone keypad<br>硅胶按键      |    | Black, silicone                                 | ZK-D4330, ZK-D3180 | <b>250</b>    |
| Shell     | ZK-D4330<br>Display shell<br>显示屏保护壳      |    | Protect mainboard and display screen            | ZK-D4330, ZK-D3180 | <b>9 360</b>  |
| Bracket   | ZK-D4330<br>Metal bracket<br>金属支架        |    | Fix and adjust the angle of the main engine     | ZK-D4330, ZK-D3180 | <b>14 976</b> |
| Switch    | ZK-D4330 Power<br>switch<br>按钮开关         |    | Power access switch                             | ZK-D4330           | <b>4 742</b>  |
| Plug      | ZK-D4330<br>12 pin signal plug<br>12芯航插头 |    | Signal line connector                           | ZK-D4330           | <b>2 496</b>  |
| Plug      | ZK-D4330<br>2 pin Quickfit(A)<br>2P快速接头A |    | Adapter and power access                        | ZK-D4330           | <b>2 246</b>  |
| Plug      | ZK-D4330<br>2 pin Quickfit(B)<br>2P快速接头B |    | Signal output<br>(with a plug)                  | ZK-D4330           | <b>1 248</b>  |
| Cover     | ZK-D4330<br>Beam lower cover<br>横梁下盖     |  | Sealing cross beam, shielding cable             | ZK-D4330           | <b>11 606</b> |
| Beam      | ZK-D4330 Rear<br>beam(B)<br>后横梁B         |  | Complete machine                                | ZK-D4330           | <b>26 832</b> |
| Beam      | ZK-D4330 Front<br>beam(A)<br>前横梁A        |  | Make up the whole machine and mount the<br>host | ZK-D4330           | <b>34 944</b> |
| Screw     | ZK-D4330 Allen screw<br>内六角大头螺栓          |  | Fixed post and host                             | ZK-D4330           | <b>749</b>    |
| Lamp post | ZK-D4330 Lamp post<br>内灯柱                |  | Lamp post on both sides of door panel           | ZK-D4330           | <b>7 114</b>  |
| Lampshade | ZK-D4330 Lampshade<br>外灯罩                |  | astigmatism                                     | ZK-D4330           | <b>7 114</b>  |
| Footcover | ZK-D4330 Footcover<br>脚套                 |  | Waterproof footcover                            | ZK-D4330           | <b>5 990</b>  |
| Coping    | ZK-D4330 Coping<br>顶盖                    |  | Installed at the top of the door                | ZK-D4330           | <b>2 621</b>  |
| Part      | trundle<br>脚轮                            |  | Move WTMD                                       | ZK-D4330           | <b>23 462</b> |
| Part      | 2" universal wheel<br>2寸万向轮              |  | part of trundle                                 | ZK-D4330           | <b>1 747</b>  |
| Panel     | ZK-D4330<br>Power panel<br>电源转接板         |  | Power interface board                           | ZK-D4330           | <b>250</b>    |
| Cover     | ZK-D4330<br>Shell Cover(A)<br>封头A        |  | Beam shell cover                                | ZK-D4330           | <b>250</b>    |
| Cover     | ZK-D4330<br>Shell Cover(B)<br>封头B        |  | Shell cover of beam lower cover                 | ZK-D4330           | <b>125</b>    |
| Cover     | Rain cover<br>防雨罩                        |  | PMMA transparent 460*249*110                    | ZK-D4330           | <b>13 728</b> |




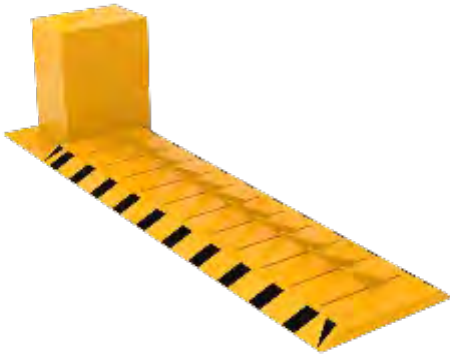
|              |                                              |                                                                                     |                                                                          |                                                                |        |
|--------------|----------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------|----------------------------------------------------------------|--------|
| Adapter      | ZK-D4330<br>Power adapter<br>电源适配器           |     | 100-240V~50/60Hz<br>15V 5A                                               | ZK-D4330                                                       | 18 845 |
| Control Unit | 6 Zones Control Unit<br>6区主机                 |    | Include mainboard screen speaker and so on<br>下单备注烧写程序                   | ZK-D1065, AMD600                                               | 37 440 |
| Control Unit | 18 Zones Control Unit<br>18区主机               |    | Include mainboard screen speaker and so on<br>下单备注烧写程序                   | ZK-D2180, AMD1800 Pro                                          | 43 680 |
| Board        | 6 Zones mainboard<br>6区主板组件                  |    | AJM_6Q mainboard Kit<br>下单备注烧写程序                                         | ZK-D1065, AMD600                                               | 24 960 |
| Board        | 18 Zones mainboard<br>18区主板组件                |    | AJM_6Q mainboard Kit<br>下单备注烧写程序                                         | ZK-D2180, AMD1800 Pro                                          | 31 200 |
| Screen       | 3.5 inch Screen<br>3.5寸彩屏                    |    | 3.5 inch Screen 2.8V 320*480                                             | ZK-D1065, ZK-D2180, AMD600,<br>AMD1800 Pro                     | 6 240  |
| Adapter      | Power adapter<br>电源适配器                       |    | 12V 3A, DC<br>interface180°φ2.1mm, Length1.8m                            | ZK-D1065, ZK-D2180, ZK-D3180 AMD600                            | 6 240  |
| Cable        | Power Cord<br>(U.S.A Standard)<br>电源线 (美标)   |  | Length 1800±50mm<br>black                                                | ZK-D1065, ZK-D2180,ZK-D3180, AMD600, ZK-D4330,<br>AMD1800 Pro  | 2 496  |
| Cable        | Power Cord<br>(EU Standard)<br>电源线 (欧标)      |  | Length 1800±50mm<br>black                                                | ZK-D1065, ZK-D2180, ZK-D3180, AMD600, ZK-D4330,<br>AMD1800 Pro | 2 496  |
| Cable        | Power Cord<br>(British Standard)<br>电源线 (英标) |  | Length 1800±50mm<br>black                                                | ZK-D1065, ZK-D2180, ZK-D3180, AMD600, ZK-D4330,<br>AMD1800 Pro | 2 496  |
| Footcover    | ZK-D1065 Footcover<br>脚套                     |  | ABS 475mm*68mm*58mm Gery                                                 | ZK-D1065                                                       | 2 496  |
| Coping       | ZK-D1065 Coping<br>顶盖                        |  | ABS 410mm*62mm*20mm Grey                                                 | ZK-D1065                                                       | 1 248  |
| Footcover    | AMD600 Footcover<br>脚套                       |  | ABS Gery 55.93*519.43*70mm                                               | AMD600                                                         | 2 496  |
| Coping       | AMD600 Coping<br>顶盖                          |  | ABS Gery 54.9*433.97*40mm                                                | AMD600                                                         | 1 872  |
| Light        | LED Board<br>(with socket)                   |  | one pcs led bar include 1 led board (with socket)<br>一个灯条包含1个灯板 (带插座)    | ZK-D1065, ZK-D2180, ZK-D3180, AMD1800 Pro                      | 2 496  |
| Light        | LED Board<br>(without socket)                |  | one pcs led bar include 5 led board(without socket)<br>一个灯条包含5个灯板 (不带插座) | ZK-D1065, ZK-D2180, ZK-D3180, AMD1800 Pro                      | 1 872  |
| Cable        | IDC Cable                                    |  | IDC-2.54-2*10P-250 length:<br>250mm±10mm                                 | ZK-D1065, ZK-D2180, ZK-D3180, AMD600, AMD1800 Pro              | 1 248  |
| Cable        | IDC Cable                                    |  | IDC-2.54-2*10P-250 length:<br>500mm±10mm                                 | ZK-D1065, ZK-D2180, ZK-D3180, AMD600, AMD1800 Pro              | 1 872  |
| Board        | 7inch screen<br>mainboard<br>7寸屏方案主板         |  | ZK-D4330/ZK-D3180 mainboard<br>下单备注烧写程序                                  | ZK-D4330, ZK-D3180                                             | 22 464 |
| Board        | Detection board<br>探测板                       |  | ZK-D4330/ZK-D3180 detection board                                        | ZK-D3180, ZK-D4330                                             | 14 976 |
| Light        | LED Board (red)<br>LED灯板(红灯)                 |  | one pcs led bar include 7 led board (red)<br>一个灯条包含7个灯板 (红灯)             | ZK-D4330                                                       | 1 872  |

|              |                                      |  |                                                                 |                                                             |         |
|--------------|--------------------------------------|--|-----------------------------------------------------------------|-------------------------------------------------------------|---------|
| Light        | LED Board (green)<br>LED灯板(绿灯 )      |  | one pcs led bar include 1 led board(green)<br>一个灯条包含1个灯板 (绿灯 )  | ZK-D4330                                                    | 2 496   |
| Cable        | FCC Cable                            |  | connect ZMM210 board to mainboard                               | ZK-D3180, ZK-D4330                                          | 374     |
| Board        | ZMM210 Core Board<br>ZMM210核心板       |  | ZMM210-V1.2-141101<br>下单备注烧写程序                                  | ZK-D3180, ZK-D4330                                          | 14 976  |
| Screen       | 7 inch<br>LCD Display<br>PCBA<br>显示屏 |  | 7 inch TFT 9.3V 800*480 -20 ~70<br>CRD070TN03-50NM02            | ZK-D4330, ZK-D3180                                          | 31 200  |
| Screen       | 7 inch<br>Touch Screen<br>触摸屏        |  | Capacitive130*225*193                                           | ZK-D4330                                                    | 31 200  |
| Speaker      | Speaker<br>(喇叭)                      |  | XDEC-40M08T17NC01-D180 8Ω 1W<br>φ40mm*5.8mm(1E-2P-180-PH 28AWG) | ZK-D4330, ZK-D3180                                          | 1 248   |
| Battery      | CR1220 Button Battery<br>CR1220电池    |  | Install on mainboard                                            | ZK-D1065, ZK-D2180, ZK-D3180, ZK-D4330, AMD600, AMD1800 Pro | 624     |
| Control Unit | New ZK-D4330<br>Control Unit<br>主机头  |  | Include mainboard screen speaker and so on<br>下单备注烧写程序          | ZK-D4330                                                    | 299 520 |
| Control Unit | New ZK-D3180<br>Control Unit<br>主机头  |  | Include mainboard screen speaker and so on<br>下单备注烧写程序          | ZK-D3180                                                    | 224 640 |



| Прайс-лист оборудования для досмотра транспортных средств |            |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                         |                   |
|-----------------------------------------------------------|------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|
| Тип                                                       | Модель     | Фото                                                                                | Параметры                                                                                                                                                                                                                                                                                                                                                                                                               | Цена розница      |
| UVIS                                                      | ZK-VSCN100 |   | <b>Portable version</b><br>30-ton axle capacity<br>Surveillance system<br>AC 220V/110V (mark it out on the order)<br><br>include :<br>Flight case (670*550*750mm)<br>Scanner (400*340*75mm)<br>Speed bumps (800*150*30mm)<br>Camera & Cables<br><br>Package Weight: 95kg                                                                                                                                                | <b>8 486 400</b>  |
| UVIS                                                      | ZK-VSCN200 |  | <b>Permanent version</b><br>50-ton axle capacity<br>Surveillance system<br>AC 220V/110V (mark it out on the order)<br><br>include :<br>Scanner (1100*280*205mm)<br>Distribution box (600*300*1000mm)<br>Console desk (650*610*1220mm)<br>Camera & Cables<br><br>Package Weight:<br>Scanner (140kg)<br>Distribution box (51kg)<br>Console desk (90kg)                                                                    | <b>12 480 000</b> |
| Under Vehicle Inspection Mirror                           | ZK-M3      |  | Mirror diameter: 300mm<br>Rod length: 1200-1400mm<br>Light source: LED<br>Device weight: 1.6kg<br>Package weight: 2.42kg<br>Package size: 860mm*290mm*330mm<br>include:<br>Rod * 4<br>LED flashlight*1                                                                                                                                                                                                                  | <b>36 192</b>     |
| Portable video under vehicle inspection                   | ZK-M20     |  | 7 inches display<br>Operating Temperature:-20 ~ +60<br>Working Voltage:9~12.6V<br>Power Consumption:6800mW<br>Net Weight:3.4KG<br>Package Dimension :1050*210*310mm<br>Carton package                                                                                                                                                                                                                                   | <b>499 200</b>    |
| Bollard                                                   | BOL1168-F  |  | Diameter : 168mm<br>Height from ground: 600mm / customization<br>Average thickness: 6mm / customization<br>Embedding depth: 200mm<br>Material: SUS304<br>Reflective strip color: Yellow<br><br>include :                                                                                                                                                                                                                | <b>451 776</b>    |
| Bollard                                                   | BOL1168-R  |  | Diameter : 168mm<br>Height from ground: 600mm / customization<br>Average thickness: 6mm / customization<br>Embedding depth: 210mm<br>Material: SUS304<br>Reflective strip color: Yellow<br><br>include :<br>BOL1168-P*1                                                                                                                                                                                                 | <b>501 696</b>    |
| Bollard                                                   | BOL1219-A  |  | <b>Drive unit: Hydraulic</b><br>Diameter: 219mm<br>Weight: ≥130KG<br>Raising height: 600mm / customization<br>Underground product dimensions: 400mm*400mm*1100mm<br>Raising / lowering time: 4s<br>Weight load: 120t<br>Material: SUS304<br>Material thickness: 6mm / customization<br>Ingress Protection: IP68<br>Working voltage: AC110/220V °C<br>Working power: 350W<br>Working temperature: -35 -75 °C<br>LED: Yes | <b>1 372 800</b>  |



|                 |                                                        |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                            |                  |
|-----------------|--------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Control Cabinet | Control Cabinet for <b>1 group automatic bollards</b>  |    | <p>Use with BOL1219-A<br/>Control 1 to 8 automatic bollards together<br/>L*W*H(mm): 400*200*500</p> <p>Include:<br/>Control cabinet*1<br/>Push button station*1<br/>Remote control*2</p>                                                                                                                                                                                                                                                   | <b>773 760</b>   |
| Control Cabinet | Control Cabinet for <b>2 groups automatic bollards</b> |    | <p>Use with BOL1219-A<br/>Control 1 to 8 automatic bollards together<br/>L*W*H(mm): 400*200*500</p> <p>Include:<br/>Control cabinet*1<br/>Push button station*1<br/>Remote control*2</p>                                                                                                                                                                                                                                                   | <b>1 032 096</b> |
| Control Cabinet | Control Cabinet for <b>3 groups automatic bollards</b> |    | <p>Use with BOL1219-A<br/>Control 1 to 8 automatic bollards together<br/>L*W*H(mm): 400*200*500</p> <p>Include:<br/>Control cabinet*1<br/>Push button station*1<br/>Remote control*2</p>                                                                                                                                                                                                                                                   | <b>1 272 960</b> |
| Bollard         | BOL2219-A                                              |   | <p>Drive unit: Hydraulic<br/>Diameter: 219mm<br/>Weight: ≥150KG<br/>Raising height: 600mm<br/>Raising / lowering time: 4s<br/>Weight load: 120t<br/>Material: SUS304<br/>Material thickness: 6mm<br/>Ingress Protection: IP68<br/>Working voltage: AC110/220V °C<br/>Working AC Adapter: 350W<br/>Working temperature: -20 -55<br/>Need work with control cabinet<br/>LED: Yes</p> <p>Include:<br/>Automatic Bollard*1<br/>Capacitor*1</p> | <b>811 200</b>   |
| Control Cabinet | ZK-HC800S                                              |  | <p>Use with BOL2219-A .<br/>One group automatic bollards.<br/>A controller is able to control up to 8 bollards.<br/>L*W*H(mm): 650*510*180</p> <p>Include:<br/>Control cabinet*1<br/>Remote control*2</p>                                                                                                                                                                                                                                  | <b>299 520</b>   |
| Tyre Killer     | ZK-TK500<br>(Length: 1.5m)                             |  | <p>Drive: Motor<br/>Dimensions(mm): L=1500, W=550, H=85<br/>Motor box(mm): L=280, W=500 ,H=400<br/>Raise height: 150mm<br/>Spike thickness: 12mm</p>                                                                                                                                                                                                                                                                                       | <b>1 569 984</b> |
| Tyre Killer     | ZK-TK500<br>(Length: 2m)                               |                                                                                     | <p>Drive: Motor<br/>Dimensions(mm): L=2000, W=550, H=85<br/>Motor box(mm): L=280, W=500 ,H=400<br/>Raise height: 150mm<br/>Spike thickness: 12mm</p>                                                                                                                                                                                                                                                                                       | <b>1 918 176</b> |
| Tyre Killer     | ZK-TK500<br>(Length: 2.5m)                             |                                                                                     | <p>Drive: Motor<br/>Dimensions(mm): L=2500, W=550, H=85<br/>Motor box(mm): L=280, W=500 ,H=400<br/>Raise height: 150mm<br/>Spike thickness: 12mm</p>                                                                                                                                                                                                                                                                                       | <b>2 267 616</b> |
| Tyre Killer     | ZK-TK500<br>(Length: 3m)                               |                                                                                     | <p>Drive: Motor<br/>Dimensions(mm): L=3000, W=550, H=85<br/>Motor box(mm): L=280, W=500 ,H=400<br/>Raise height: 150mm<br/>Spike thickness: 12mm</p>                                                                                                                                                                                                                                                                                       | <b>2 615 808</b> |
| Tyre Killer     | ZK-TK500<br>(Length: 3.5m)                             |                                                                                     | <p>Drive: Motor<br/>Dimensions(mm): L=3500, W=550, H=85<br/>Motor box(mm): L=280, W=500 ,H=400<br/>Raise height: 150mm<br/>Spike thickness: 12mm</p>                                                                                                                                                                                                                                                                                       | <b>2 964 000</b> |
| Tyre Killer     | ZK-TK500<br>(Length: 4m)                               |                                                                                     | <p>Drive: Motor<br/>Dimensions(mm): L=4000, W=550, H=85<br/>Motor box(mm): L=280, W=500 ,H=400<br/>Raise height: 150mm<br/>Spike thickness: 12mm</p>                                                                                                                                                                                                                                                                                       | <b>3 312 192</b> |
| Tyre Killer     | ZK-TK500<br>(Length: 4.5m)                             |                                                                                     | <p>Drive: Motor<br/>Dimensions(mm): L=4500, W=550, H=85<br/>Motor box(mm): L=280, W=500 ,H=400<br/>Raise height: 150mm<br/>Spike thickness: 12mm</p>                                                                                                                                                                                                                                                                                       | <b>3 660 384</b> |
| Tyre Killer     | ZK-TK500<br>(Length: 5m)                               |                                                                                     | <p>Drive: Motor<br/>Dimensions(mm): L=5000, W=550, H=85<br/>Motor box(mm): L=280, W=500 ,H=400<br/>Raise height: 150mm<br/>Spike thickness: 12mm</p>                                                                                                                                                                                                                                                                                       | <b>4 032 288</b> |
| Tyre Killer     | ZK-TK500<br>(Length: 5.5m)                             |                                                                                     | <p>Drive: Motor<br/>Dimensions(mm): L=5500, W=550, H=85<br/>Motor box(mm): L=280, W=500 ,H=400<br/>Raise height: 150mm<br/>Spike thickness: 12mm</p>                                                                                                                                                                                                                                                                                       | <b>4 356 768</b> |

|             |                          |                                                                                                                                           |           |
|-------------|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| Tyre Killer | ZK-TK500<br>(Length: 6m) | Drive: Motor<br>Dimensions(mm): L=6000, W=550, H=85<br>Motor box(mm): L=280, W=500 ,H=400<br>Raise height: 150mm<br>Spike thickness: 12mm | 4 706 208 |
|-------------|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|-----------|

| Праи-лист на парковочные шлагбаумы |                          |              |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |              |
|------------------------------------|--------------------------|--------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| Тип 1                              | Тип 2                    | Модель       | Фото                                                                                | Параметры                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Цена розница |
| Brushless DC motor                 | Solar energy barrier     | BG-SPB200L/R |    | DC 24V brushless solar power barrier gate<br>Chassis with solar panel, Telescopic straight boom(without led and rubber)<br>Power : solar energy automatically charges the battery no need AC input (barrier built-in two 12V 9Ah battery),<br>Boom length (Confirm according to the order notes): 3m ,4.5m, 6m(Telescopic boom)<br>Opening&closing times : 1.5S~6S (adjustable)<br>Spring size:φ5.0/φ6.0mm<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left                                                                                                                                                     | 970 944      |
| Brushless DC motor                 | Parking barrier with LCD | BG-LCD100L/R |   | DC 24V brushless barrier gate<br>With 21.5 inches TFT LCD display<br>With wifi module,support ZKBarrier APP control function<br>Chassis with LCD screen ,Support ZKBioMedia software customize play third-party advertising<br>Power : 110V/220V AC(support choose manually adjust 110V input)<br>Boom length: L≤3m<br>Wooden case packing<br>Boom type:Round straight boom, boom connector with anti-collision function<br>Opening&closing times : 0.6S~3S<br>Spring size: Two 3.5φ<br>Support change direction , can adjust speed(depend on the boom length)<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left | 1 035 840    |
| Brushless DC motor                 | Parking barrier          | BG2000L/R    |  | DC 24V brushless barrier gate<br><b>With wifi module,support ZKBarrier APP control function</b><br><b>Chassis with LED, Round straight boom(without led)</b><br>Power : 110V/220V AC(support choose manually adjust 110V input),<br>Boom length: 3m<br><b>Boom type:Round straight boom with anti-collision function</b><br><b>Opening&amp;closing times : 0.6S~3S</b><br>Spring size: Two 3.5φ<br>Support change direction , can adjust speed(depend on the boom length)<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left                                                                                      | 536 640      |
| Brushless DC motor                 | Parking barrier          | BGM1030L/R   |  | Chassis with LED, straight boom(without led)<br><b>With wifi module,support ZKBarrier APP control function</b><br>AC Adapter: 220V/110V AC(support choose manually adjust 110V input),<br>Boom length: 3m<br>Opening&closing times : 1.5S<br>Spring size:4.5φ<br>Support change direction , can adjust speed(1.5s~3s,depend on the boom length 1m~4.5m )<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left                                                                                                                                                                                                       | 403 104      |
| Brushless DC motor                 | Parking barrier          | BGM1045L/R   |                                                                                     | Chassis with LED,telescopic boom(without led)<br><b>With wifi module,support ZKBarrier APP control function</b><br>Power : 220V/110V AC(support choose manually adjust 110V input),<br>Boom length: 4.5m (2.5m+2.2m)<br>Opening&closing times : 2.5S<br>Spring size:5.5φ<br>Support change direction , can adjust speed(3s~6s,depend on the boom length 1m~6m)<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left                                                                                                                                                                                                 | 403 104      |
| Brushless DC motor                 | Parking barrier          | BGM1060L/R   |                                                                                     | Chassis with LED,telescopic boom(without led)<br><b>With wifi module,support ZKBarrier APP control function</b><br>Power : 220V/110V AC(support choose manually adjust 110V input),<br>Boom length: 6m(3.2m+3m)<br>Opening&closing times : 5S<br>Spring size:6.5φ<br>Support change direction , can adjust speed(3s~6s,depend on the boom length 1m~6m)<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left                                                                                                                                                                                                        | 403 104      |



|                    |                 |                  |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |         |
|--------------------|-----------------|------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Brushless DC motor | Parking barrier | BGM1030L/R-W     |    | Chassis with LED, straight boom(without led)<br>(Chassis with wooden case packing )<br>With wifi module,support ZKBarrier APP control function<br>AC Adapter: 220V/110V AC(support choose manually adjust 110V input),<br>Boom length: 3m<br>Opening&closing times : 1.5S<br>Spring size:4.5φ<br>Support change direction , can adjust speed(1.5s~3s,depend on the boom length 1m~4.5m )<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left       | 440 544 |
| Brushless DC motor | Parking barrier | BGM1045L/R-W     |    | Chassis with LED,telescopic boom(without led)<br>(Chassis with wooden case packing )<br>With wifi module,support ZKBarrier APP control function<br>Power : 220V/110V AC(support choose manually adjust 110V input),<br>Boom length: 4.5m (2.5m+2.2m)<br>Opening&closing times : 2.5S<br>Spring size:5.5φ<br>Support change direction , can adjust speed(3s~6s,depend on the boom length 1m~6m)<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left | 440 544 |
| Brushless DC motor | Parking barrier | BGM1060L/R-W     |                                                                                     | Chassis with LED,telescopic boom(without led)<br>(Chassis with wooden case packing )<br>With wifi module,support ZKBarrier APP control function<br>Power : 220V/110V AC(support choose manually adjust 110V input),<br>Boom length: 6m(3.2m+3m)<br>Opening&closing times : 5S<br>Spring size:6.5φ<br>Support change direction , can adjust speed(3s~6s,depend on the boom length 1m~6m)<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left        | 440 544 |
| Brushless DC motor | Parking barrier | BGM1030L/R-LED   |  | Chassis with LED, straight boom(with led )<br>With wifi module,support ZKBarrier APP control function<br>AC Adapter: 220V/110V AC(support choose manually adjust 110V input),<br>Boom length: 3m<br>Opening&closing times : 1.5S<br>Spring size:4.5φ<br>Support change direction , can adjust speed(1.5s~3s,depend on the boom length 1m~4.5m )<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left                                                | 454 272 |
| Brushless DC motor | Parking barrier | BGM1045L/R-LED   |                                                                                     | Chassis with LED, straight boom(with led)<br>With wifi module,support ZKBarrier APP control function<br>Power : 220V/110V AC(support choose manually adjust 110V input),<br>Boom length: 4.5m<br>Opening&closing times : 2.5S<br>Spring size:5.5φ<br>Support change direction , can adjust speed(3s~6s,depend on the boom length 1m~6m)<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left                                                        | 456 768 |
| Brushless DC motor | Parking barrier | BGM1030L/R-LED-W |  | Chassis with LED, straight boom(with led )<br>(Chassis with wooden case packing )<br>With wifi module,support ZKBarrier APP control function<br>AC Adapter: 220V/110V AC(support choose manually adjust 110V input),<br>Boom length: 3m<br>Opening&closing times : 1.5S<br>Spring size:4.5φ<br>Support change direction , can adjust speed(1.5s~3s,depend on the boom length 1m~4.5m )<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left         | 491 712 |
| Brushless DC motor | Parking barrier | BGM1045L/R-LED-W |  | Chassis with LED, straight boom(with led )<br>(Chassis with wooden case packing )<br>With wifi module,support ZKBarrier APP control function<br>Power : 220V/110V AC(support choose manually adjust 110V input),<br>Boom length: 4.5m<br>Opening&closing times : 2.5S<br>Spring size:5.5φ<br>Support change direction , can adjust speed(3s~6s,depend on the boom length 1m~6m)<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left                | 494 208 |

|                    |                 |                         |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                |
|--------------------|-----------------|-------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Brushless DC motor | Parking barrier | BGM1145L/R-90           |    | DC 24V brushless barrier gate<br><b>Chassis with LED,folding boom(without led)</b><br><b>With wifi module,support ZKBarrier APP control function</b><br>Power : 110V/220V AC(support choose manually adjust 110V input)<br>Boom length: ≤4.5m<br>(standard main boom is 2m , second boom is 2.5m, Support customization of total height and total length )<br>Total height limit: ≤2.8m<br>Opening&closing times : 3S<br>Spring size:5.5φ<br>Main and second boom lengths can be customization on the order<br>Support change direction , can adjust speed(1.5s~3s,depend on the boom length 1m~4.5m)<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left                                               | <b>494 208</b> |
| Brushless DC motor | Parking barrier | BGM1145L/R-90           |   | DC 24V brushless barrier gate<br><b>Chassis with LED,folding boom(without led)</b><br><b>(Chassis with wooden case packing )</b><br><b>With wifi module,support ZKBarrier APP control function</b><br>Power : 110V/220V AC(support choose manually adjust 110V input)<br>Boom length: ≤4.5m<br>(standard main boom is 2m , second boom is 2.5m, Support customization of total height and total length )<br>Total height limit: ≤2.8m<br>Opening&closing times : 3S<br>Spring size:5.5φ<br>Main and second boom lengths can be customization on the order<br>Support change direction , can adjust speed(1.5s~3s,depend on the boom length 1m~4.5m)<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left | <b>531 648</b> |
| Standalone device  | Parking barrier | CMP200                  |  | chassis with LED, 4.5m telescope boom(without led)<br>AC Adapter : 220V,<br>Boom length: 4.5m(2.5m+2.2m, support adjust)<br>opening&closing times : 3S<br>support change direction<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <b>264 576</b> |
| Standalone device  | Parking barrier | CMP200                  |  | chassis with LED,6 m telescope boom(without led)<br>AC Adapter : 220V,<br>Boom length: 6m(3.2m+3m support adjust)<br>opening&closing times : 6S<br>support change direction<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <b>264 576</b> |
| Standalone device  | Parking barrier | CMP200                  |  | chassis with LED, 4.5m telescope boom(without led)<br>AC Adapter : 110v ,<br>Boom length: 4.5m(2.5m+2.2m support adjust)<br>opening&closing times : 3S<br>support change direction<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <b>264 576</b> |
| Standalone device  | Parking barrier | CMP200                  |  | chassis with LED, 6m telescope boom(without led)<br><b>AC Adapter : 110V,</b><br>Boom length: 6m(3.2m+3m support adjust)<br>opening&closing times : 6S<br>support change direction<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <b>264 576</b> |
| Standalone device  | Parking barrier | CMP200 (Yellow chassis) |  | chassis with LED, telescope boom(without led)<br>AC Adapter : 220V,<br>Boom length: 4.5m(2.5m+2.2m, support adjust)<br>opening&closing times : 3S<br>support change direction , cannot adjust speed<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left<br><br>MOQ:30PCS                                                                                                                                                                                                                                                                                                                                                                                                                                | <b>264 576</b> |
| Standalone device  | Parking barrier | CMP200 (Yellow chassis) |  | chassis with LED, telescope boom(without led)<br>AC Adapter : 220V,<br>Boom length: 6m(3.2m+3m support adjust)<br>opening&closing times : 6S<br>support change direction , cannot adjust speed<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left<br><br>MOQ:30PCS                                                                                                                                                                                                                                                                                                                                                                                                                                     | <b>264 576</b> |



|                   |                 |          |                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                           |                |
|-------------------|-----------------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Standalone device | Parking barrier | CMP200   |                                                                                           | Chassis with LED,<br>Straight boom (with led)<br>AC Adapter : 220V,<br>Boom length: 4.5m<br>opening&closing times : 3S<br>support change direction , cannot adjust speed<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left<br><br>MOQ: 20 PCS                                             | <b>339 456</b> |
| Standalone device | Parking barrier | CMP200   |                                                                                           | Chassis with LED,<br>Straight boom (with led)<br>AC Adapter : 220V,<br>Boom length: 4.5m<br>opening&closing times : 3S<br>support change direction , cannot adjust speed<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left<br>Yellow chassis<br>MOQ: 30 pcs                               | <b>339 456</b> |
| Standalone device | Parking barrier | CMP200   |                                                                                           | Chassis with LED, 90° folding boom(without led)<br>AC Adapter : 220V,<br>Boom length: 4m<br>Height limit : 2.5m<br>MOQ: 20PCS<br>pening&closing times : 3S<br>support change direction , cannot adjust speed<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left                            | <b>364 416</b> |
| Standalone device | Parking barrier | CMP200   |                                                                                          | Yellow Chassis with LED, 90° folding boom(without led)<br>AC Adapter : 220V,<br>Boom length: 4m<br>Height limit : 2.5m<br>MOQ: 30PCS<br>pening&closing times : 3S<br>support change direction , cannot adjust speed<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left<br>Yellow chassis   | <b>364 416</b> |
| Standalone device | Parking barrier | CMP200-W | <br> | chassis with LED, telescope boom(without led), backage with wooden box<br>AC Adapter : 220V,<br>Boom length: 4.5m(2.5m+2.2m, support adjust)<br>opening&closing times : 3S<br>support change direction , cannot adjust speed<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left            | <b>302 016</b> |
| Standalone device | Parking barrier | CMP200-W |                                                                                                                                                                            | chassis with LED, telescope boom(without led), backage with wooden box<br>AC Adapter : 220V,<br>Boom length: 6m(3.2m+3m support adjust)<br>opening&closing times : 6S<br>support change direction<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left                                       | <b>302 016</b> |
| Standalone device | Parking barrier | CMP200-W |                                                                                                                                                                            | chassis with LED, telescope boom(without led), backage with wooden box<br>AC Adapter : 110v ,<br>Boom length: 4.5m(2.5m+2.2m support adjust)<br>opening&closing times : 3S<br>support change direction , cannot adjust speed<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left            | <b>302 016</b> |
| Standalone device | Parking barrier | CMP200-W |                                                                                                                                                                            | chassis with LED, telescope boom(without led), backage with wooden box<br>AC Adapter : 110V,<br>Boom length: 6m(3.2m+3m support adjust)<br>opening&closing times : 6S<br>support change direction , cannot adjust speed<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left                 | <b>302 016</b> |
| Standalone device | Parking barrier | CMP200-W |                                                                                                                                                                            | Yellow chassis with LED, telescope boom(without led), backage with wooden box<br>AC Adapter : 220V,<br>Boom length: 4.5m(2.5m+2.2m, support adjust)<br>opening&closing times : 3S<br>support change direction<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left<br><br>MOQ:30PCS          | <b>302 016</b> |
| Standalone device | Parking barrier | CMP200-W |                                                                                         | chassis with LED, telescope boom(without led), backage with wooden box<br>AC Adapter : 220V,<br>Boom length: 6m(3.2m+3m support adjust)<br>opening&closing times : 6S<br>support change direction , cannot adjust speed<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left<br><br>MOQ30pcs | <b>302 016</b> |




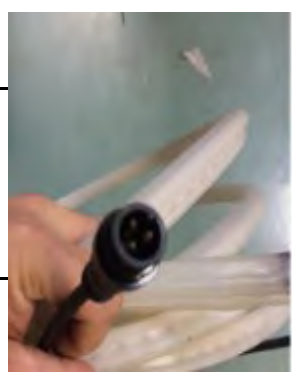

|                   |                 |                  |                                                                                     |                                                                                                                                                                                                                                                                                                     |                |
|-------------------|-----------------|------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Standalone device | Parking barrier | PB4030L/R        |    | <b>*Straight Boom Barrier Gate (With Boom)</b><br>Only 4m boom,3s opening&closing time<br><b>Only 220V</b><br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left                                                                                                        | <b>349 440</b> |
| Standalone device | Parking barrier | PB4030L/R        |    | <b>*Straight Boom Barrier Gate (With Boom)</b><br>Only 4m boom,3s opening&closing time<br><b>Only 110V</b><br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left                                                                                                        | <b>349 440</b> |
| Standalone device | Parking barrier | PB4060L/R        |    | <b>*Straight Boom Barrier Gate (With Boom)</b><br>Only 6m boom,6s opening&closing time<br><b>Only 220V</b><br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left                                                                                                        | <b>349 440</b> |
| Standalone device | Parking barrier | PB4060L/R        |    | <b>*Straight Boom Barrier Gate (With Boom)</b><br>Only 6m boom,6s opening&closing time<br><b>Only 110V</b><br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left                                                                                                        | <b>349 440</b> |
| Standalone device | Parking barrier | PB4030L/R-LED    |    | <b>*Straight Boom Barrier Gate (With Boom)</b><br><b>Boom with LED</b><br>Only 4m boom,3s opening&closing time<br><b>Only 220V</b><br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left                                                                                | <b>361 920</b> |
| Standalone device | Parking barrier | PB4030L/R-LED    |   | <b>*Straight Boom Barrier Gate (With Boom)</b><br><b>Boom with LED</b><br>Only 4m boom,3s opening&closing time<br><b>Only 110V</b><br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left                                                                                | <b>361 920</b> |
| Standalone device | Parking barrier | PB4130L/R        |  | <b>* 90° Folding Boom Barrier Gate (With Boom)</b><br>Only 3m(1.7m+1.3m) boom,3s opening time<br><b>Only 220V</b><br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left                                                                                                 | <b>374 400</b> |
| Standalone device | Parking barrier | PB4130L/R        |  | <b>* 90° Folding Boom Barrier Gate (With Boom)</b><br>Only 3m(1.7m+1.3m) boom,3s opening time<br><b>110V ; Limit is 2.5 meters tall</b><br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left                                                                           | <b>374 400</b> |
| Standalone device | Parking barrier | ProBG3030L/R     |  | <b>*Straight Boom Barrier Gate (With Boom)</b><br><b>Chassis with LED,Boom without LED</b><br>30:3m boom, 45:4.5m boom, 60:6m boom<br>L:Chassis is on left,boom is on right<br>R:Chassis is on left,boom is on right                                                                                | <b>712 608</b> |
| Standalone device | Parking barrier | ProBG3045L/R     |                                                                                     |                                                                                                                                                                                                                                                                                                     |                |
| Standalone device | Parking barrier | ProBG3060L/R     |                                                                                     |                                                                                                                                                                                                                                                                                                     |                |
| Standalone device | Parking barrier | ProBG3030L/R-LED |                                                                                     | <b>*Straight Boom Barrier Gate (With Boom)</b><br><b>Chassis with LED,Boom with LED</b><br>30:3m boom, 45:4.5m boom, 60:6m boom<br>L:Chassis is on left,boom is on right<br>R:Chassis is on left,boom is on right                                                                                   | <b>731 328</b> |
| Standalone device | Parking barrier | ProBG3045L/R-LED |                                                                                     |                                                                                                                                                                                                                                                                                                     | <b>757 536</b> |
| Standalone device | Parking barrier | ProBG3060L/R-LED |                                                                                     |                                                                                                                                                                                                                                                                                                     | <b>784 992</b> |
| Standalone device | Parking barrier | ProBG3130L/R     |  | <b>*90° Folding Boom Barrier Gate(With Boom)</b><br><b>Chassis with LED, Boom without LED</b><br>3m boom (1.45m+1.55m ; Limit is 2.2 meters tall)<br>0.9s Opening Time<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left                                            | <b>753 792</b> |
| Standalone device | Parking barrier | ProBG3130L/R-LED |                                                                                     | <b>*90° Folding Boom Barrier Gate(With Boom)</b><br><b>Chassis with LED,Boom with LED</b><br>3m boom (1.45m+1.55m ; Limit is 2.2 meters tall)<br>0.9s Opening Time<br>Height limit 2.2m<br>L:Chassis is on left,boom is on right<br>R:Chassis is on left,boom is on right<br>AC Adapter : 110V~220V | <b>797 472</b> |
| Standalone device | Parking barrier | ProBG3230L/R     |  | <b>Fence pole Barrier Gate(Red and White color)</b><br><b>Chassis with LED,Boom without LED</b><br>3m fence boom<br>2s opening speed<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left<br>AC Adapter : 110V~220V                                                    | <b>954 720</b> |
| Standalone device | Parking barrier | ProBG3240L/R     |                                                                                     | <b>Fence pole Barrier Gate(Red and White color)</b><br><b>Chassis with LED,Boom without LED</b><br>4m fence boom<br>3s opening speed<br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left<br>AC Adapter : 110V~220V                                                    | <b>979 680</b> |




|                   |                 |              |                                                                                   |                                                                                                                                                                                                                                                                                                |                  |
|-------------------|-----------------|--------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Standalone device | Parking barrier | ProBG6000L/R |  | High speed barrier (including boom),<br>0.6S opening speed,<br>only 3m carbon fiber circular straight boom,<br><b>Brand logo</b><br>≥ 8 million opening/closing times<br><b>Remote control not included,</b><br>L:Chassis is on left,boom is on right<br>R:Chassis is on right,boom is on left | <b>1 060 800</b> |
|-------------------|-----------------|--------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|

Прайс-лист на комплектующие для парковочных шлагбаумов

| Тип                         | Модель                                          | Фото                                                                                | Параметры                                                                                                                                                                                                                                                                        | Совместимое устройство    | Цена розница   |
|-----------------------------|-------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|----------------|
| Parking barrier accessories | PSA26                                           |    | Infrared Intrusion Detectors (with bracket)<br>one transmitter and one receiver                                                                                                                                                                                                  | All parking barrier       | <b>118 560</b> |
| Parking barrier accessories | VR10 Pro                                        |    | Vehicle detection radar<br><b>Support APP control</b><br>smart anti-smash and automatical closing for barrier gate<br>support detect : vehicle , people<br>ZKTeco Logo;<br>Detect distance: 0~6m<br>communication: Bluetooth ,RS485 , relay<br>working frequency : 79GHz<br>IP67 | All parking barrier       | <b>104 832</b> |
| Parking barrier accessories | USB TO RS-485 converter                         |   | For VR10 radar<br>Used for connecting software to adjust parameters                                                                                                                                                                                                              | All parking barrier       | <b>18 720</b>  |
| Parking barrier accessories | Parking Warning Light                           |  | Parking Warning Light for parking barrier<br>AC Adapter : DC 24V<br>Red, green, double color<br>With buzzer<br>MQQ-30PCS                                                                                                                                                         | All parking barrier       | <b>18 720</b>  |
| Parking barrier accessories | PAC100                                          |  | Stainless Steel Pole with MA300<br>Water proof for outdoor installation<br>RFID and Fingerprint Identification                                                                                                                                                                   | All parking barrier       | <b>162 240</b> |
| Parking barrier accessories | PSA02                                           |  | 220V Loop Detector                                                                                                                                                                                                                                                               | All parking barrier       | <b>31 200</b>  |
| Parking barrier accessories | PSA02-B                                         |  | 110V Loop Detetor                                                                                                                                                                                                                                                                | All parking barrier       | <b>31 200</b>  |
| Parking barrier accessories | LD01                                            |  | <b>*Loop Detector</b><br>Single channel<br>Support DC24V                                                                                                                                                                                                                         | Only Support ProBG series | <b>18 720</b>  |
| Parking barrier accessories | PSA03                                           |  | 100 Meters Loop                                                                                                                                                                                                                                                                  | All loop detector         | <b>18 720</b>  |
| Parking barrier accessories | Manual button                                   |  | *Button<br>For all barrier gate model;                                                                                                                                                                                                                                           | All parking barrier       | <b>6 240</b>   |
| Parking barrier accessories | Manual button                                   |  | *Button<br>For all barrier gate model;                                                                                                                                                                                                                                           | All parking barrier       | <b>6 240</b>   |
| ProBG Series accessories    | Boom-130                                        |  | *3m Straight Boom<br>Standard anticollision rubber strip, Without LED                                                                                                                                                                                                            | Only Support ProBG series | <b>52 416</b>  |
| ProBG Series accessories    | Boom-145                                        |                                                                                     | *4.5m Straight Boom<br>Standard anticollision rubber strip, Without LED                                                                                                                                                                                                          |                           |                |
| ProBG Series accessories    | Boom-230                                        |  | *3m 90° Folding Boom<br>Standard anticollision rubber strip, Without LED                                                                                                                                                                                                         | Only Support ProBG series | <b>93 600</b>  |
| ProBG Series accessories    | Boom-130-LED                                    |  | *3m Straight Boom<br>Standard anticollision rubber strip, With LED                                                                                                                                                                                                               | Only Support ProBG series | <b>71 136</b>  |
| ProBG Series accessories    | Boom-145-LED                                    |  | *4.5m Straight Boom<br>Standard anticollision rubber strip, With LED                                                                                                                                                                                                             | Only Support ProBG series | <b>97 344</b>  |
| ProBG Series accessories    | ProBG伸缩杆                                        |  | 6m telescope boom (3m+3.2m)<br><b>Standard anticollision rubber strip, Without LED</b><br><b>Only Support ProBG series</b>                                                                                                                                                       | Only Support ProBG series | <b>52 416</b>  |
| ProBG Series accessories    | ProBG伸缩杆-LED                                    |  | 6m telescope boom (3m+3.2m)<br><b>Standard anticollision rubber strip, With LED</b><br><b>Only Support ProBG series</b>                                                                                                                                                          | Only Support ProBG series | <b>124 800</b> |
| ProBG Series accessories    | Boom-230-LED                                    |  | *3m 90° Folding Boom<br>Standard anticollision rubber strip, <b>With LED</b>                                                                                                                                                                                                     | Only Support ProBG series | <b>137 280</b> |
| ProBG Series accessories    | PSA67(PROBG道闸)<br>/ProBG Series Remote receiver |  | *Remote receiver *1<br>For ProBG series barrier gate<br>433MHz                                                                                                                                                                                                                   | Only Support ProBG series | <b>4 992</b>   |
| ProBG Series accessories    | PSA55(PROBG道闸)<br>/ProBG Series Remote Control  |  | *Remote Control<br>For ProBG series barrier gate                                                                                                                                                                                                                                 | Only Support ProBG series | <b>4 992</b>   |




|                            |                           |                                                                                     |                                                                                                                                                                            |                           |                |
|----------------------------|---------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|----------------|
| ProBG Series accessories   | ProBG-PSA66               |    | *Dc servo brushless motor<br>For ProBG2000+ProBG3000<br>The rated voltage : DC 24V 100W<br>3000r/min 0.318Nm<br>MTTR<0.5 hours                                             | Only Support ProBG series | <b>312 000</b> |
| ProBG Series accessories   | PSA71                     |    | *Servo motor<br>(not include reducer)<br>For ProBG2000+ProBG3000                                                                                                           | Only Support ProBG series | <b>99 840</b>  |
| ProBG Series accessories   | ProBG-PSA54               |    | *Control Mainboard<br>For ProBG2000&ProBG3000<br>AC/DC24V                                                                                                                  | Only Support ProBG series | <b>115 565</b> |
| ProBG Series accessories   | ProBG-PSA57               |    | *AC Adapter Supply<br>For ProBG2000&ProBG3000<br>Input:110V-220V; Output:DC24V                                                                                             | Only Support ProBG series | <b>41 184</b>  |
| ProBG Series accessories   | ProBG-PSA59               |    | *Balance Spring<br>For ProBG3000 D=3.5mm                                                                                                                                   | Only Support ProBG 3000   | <b>14 976</b>  |
| ProBG Series accessories   | ProBG-PSA60               |    | *Balance Spring<br>For ProBG3000 D=4.5mm                                                                                                                                   | Only Support ProBG 3000   | <b>14 976</b>  |
| ProBG Series accessories   | ProBG-PSA61               |    | *Balance Spring<br>For ProBG2000 D=4.5mm L=360mm<br>Side with a hook                                                                                                       | Only Support ProBG 2000   | <b>14 976</b>  |
| ProBG Series accessories   | ProBG-PSA62               |  | *Balance Spring<br>For ProBG2000 D=5.5mm L=360mm<br>Side with a hook                                                                                                       | Only Support ProBG 2000   | <b>14 976</b>  |
| ProBG Series accessories   | ProBG-PSA56               |  | *Parameter debugging board<br>For ProBG series                                                                                                                             | Only Support ProBG series | <b>24 960</b>  |
| ProBG Series accessories   | ProBG LED lighter-L30     |  | For ProBG Series : ProBG3030-LED L/R,<br>ProBG2030-LED L/R<br>led strip with connector<br>3m                                                                               | Only Support ProBG series | <b>27 082</b>  |
| ProBG Series accessories   | ProBG LED lighter-L45     |                                                                                     | For ProBG Series:ProBG3030-LED L/R,<br>ProBG2030-LED L/R<br>led strip with connector<br>4.5m                                                                               | Only Support ProBG series | <b>41 184</b>  |
| ProBG Series accessories   | ProBG LED lighter -L60    |                                                                                     | For ProBG Series:ProBG3030-LED L/R,<br>ProBG2030-LED L/R<br>led strip with connector<br>6m                                                                                 | Only Support ProBG series | <b>59 904</b>  |
| ProBG Series accessories   | ProBG Accessories         |  | remote control * 2,<br>pressure bar * 2,<br>key * 2,<br>bursting screw * 4,<br>gate screw * 1,<br>antenna module * 1                                                       | Only Support ProBG series | <b>37 440</b>  |
| ProBG Series accessories   | ProBG2000 Wooden box      |  | L*W*H: 1100*520*410                                                                                                                                                        | Only Support ProBG 2000   | <b>37 440</b>  |
| ProBG Series accessories   | ProBG3000 Wooden box      |  | L*W*H: 1100*560*410                                                                                                                                                        | Only Support ProBG 3000   | <b>37 440</b>  |
| BGM1000 Series accessories | ZKBarrier wi-fi mainboard |  | Size : 180mm*120mm*37mm<br>Working voltage/current : DC24V , 30mA<br>Standard with Wi-Fi module,Digital debug board<br>Support zkbarrier APP control                       | BGM1000/BG2000            | <b>49 920</b>  |
| BGM1000 Series accessories | BLDC-L/R-18B12S           |  | 200mm*230mm*37mm 3~6s speed adjustable<br>apply to boom L <4.5m<br>boom、with motor、reducer、crank connecting<br>link(without spring)<br>120~140W 6A DC24V<br>1500R/MIN      | BGM1030/BGM1045           | <b>207 360</b> |
| BGM1000 Series accessories | BLDC-L/R-18B25S           |  | 200mm*230mm*370mm 3~6s speed adjustable<br>apply to boom from 4.5~6m boom、with<br>motor、reducer、crank connecting link(without<br>spring)<br>120~140W 6A DC24V<br>1500R/MIN | BGM1060                   | <b>207 360</b> |
| BGM1000 Series accessories | BGM1000 Chassis           |  | 350mm*305mm*1020mm With chassis body,<br>door (without LED and protective<br>cover) 、Key、package box、ZKTeco logo                                                           | BGM1000                   | <b>116 688</b> |


|                            |                               |                                                                                     |                                                                                                                                       |                     |                |
|----------------------------|-------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------------|
| BGM1000 Series accessories | BGM1000 LED cover             |    | LED door protective cover<br>SPCC T=1.5mm 207*170/220*25mm<br>color : white<br>Use for BGM1000 LED door                               | BGM1000             | <b>4 243</b>   |
| BGM1000 Series accessories | BGM1000 LED strip             |    | 12V 2835RG<br>length:680 and 850<br>Use for BGM1000 LED door                                                                          | BGM1000             | <b>14 976</b>  |
| BGM1000 Series accessories | BGM1000-spring (4mm)          |    | Φ35*Φ4.5*350mm<br>color:black<br>Use for BGM1030 (4mm* 2pcs For 3m boom arm)                                                          | BGM1000             | <b>7 987</b>   |
| BGM1000 Series accessories | BGM1000-spring (4.5mm)        |    | Φ35*Φ4.5*350mm<br>color:black<br>Use for BGM1045 (4.5mm* 2pcs For 4.5m boom)                                                          | BGM1000             | <b>7 987</b>   |
| BGM1000 Series accessories | BGM1000-spring (5mm)          |    | Φ35*Φ5*350mm<br>color:black<br>Use for BGM1060 (4.5mm* 2pcs For 6m boom)                                                              | BGM1000             | <b>7 987</b>   |
| BGM1000 Series accessories | BGM1000 Boom Connector        |   | SPCC 186*98*69.2<br>Color:white                                                                                                       | BGM1000             | <b>9 110</b>   |
| BGM1000 Series accessories | BGM1000 Boom Clamp Plate      |  | SPCC 186*87.3*10.4mm<br>Color:white                                                                                                   | BGM1000             | <b>2 621</b>   |
| BGM1000 Series accessories | BG1000 Power Supply(24V)      |  | HXL240P<br>input:110-220V<br>output:DC24V/10A<br>199*109*50mm                                                                         | BGM1000             | <b>11 482</b>  |
| BGM1000 Series accessories | BGM1000 Power Supply(12V)     |  | PD-H35S12<br>input:176~264V<br>output:12V/3A<br>(optional)                                                                            | BGM1000             | <b>10 109</b>  |
| BGM1000 Series accessories | BGM1000 Remote Receiver       |  | 5V 3P 2.54mm 71*60*29mm<br>Frequency:433MHz<br>Color:white(with cable)                                                                | BGM1000             | <b>4 618</b>   |
| BGM1000 Series accessories | BG1000 Remote Controller      |  | GW-94TL-B 4KEY<br>Color:black<br>Frequency:433MHz<br>(with 23A 12V dry battery)                                                       | BGM1000             | <b>4 618</b>   |
| BGM1000 Series accessories | BGM1000 Straight Boom(3m)     |  | Aluminium alloy T=1mm 3010*86*44.2mm<br>Color:white(with red sticker)<br>Length:3m(without LED and rubber strip)                      | BGM1000             | <b>31 200</b>  |
| BGM1000 Series accessories | BGM1000 Straight Boom(4.5m)   |  | Aluminium alloy T=1mm 4500*86*44.2mm<br>Color:white(with red sticker)<br>Length:4.5m(without LED and rubber strip)                    | BGM1000             | <b>32 595</b>  |
| BGM1000 Series accessories | BGM1000 Telescopic Boom(4.5m) |  | Aluminium alloy T=1mm 2500*86*44.2mm / 2300*78.6*37.1mm<br>Color:white(with red sticker)<br>Length:4.5m(without LED and rubber strip) | BGM1000             | <b>32 595</b>  |
| BGM1000 Series accessories | BGM1000 Telescopic Boom(6m)   |  | Aluminium alloy T=1mm 3315*86*44.2mm / 3015*78.6*37.1mm<br>Color:white(with red sticker)<br>Length:6m(without LED and rubber strip)   | BGM1000             | <b>36 339</b>  |
| BGM1000 Series accessories | BGM1000 Power Switch          |  | CDBK C型 2P 10A 80mm*78.5mm*35.4mm                                                                                                     | BGM1000             | <b>7 488</b>   |
| BG1000 Series accessories  | BG1000 Chassis Package        |  | 350mm*305mm*1020mm With chassis body、LED door、Key、package box、ZKTeco logo                                                             | Only Support BG1000 | <b>116 640</b> |





|                           |                                    |                                                                                     |                                                                                                                                       |                                |                |
|---------------------------|------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|----------------|
| BG1000 Series accessories | BG1000 Chassis                     |    | 350mm*275mm*1020mm<br>Only gray chassis body、with key, without door                                                                   | Only Support BG1000            | <b>75 168</b>  |
| BG1000 Series accessories | BG1000 LED Door                    |    | 30*350*1010mm Only LED door                                                                                                           | Only Support BG1000            | <b>41 472</b>  |
| BG1000 Series accessories | BG1000 Transmission Mechanism      |    | 200mm*230mm*370mm 1.5~3s speed adjustable<br>apply to boom L <4.5m<br>boom、with motor、reducer、crank connecting link(without spring)   | Only Support BG1000            | <b>207 360</b> |
| BG1000 Series accessories | BG1000 Transmission Mechanism (6M) |    | 200mm*230mm*370mm 3~6s speed adjustable<br>apply to boom from 4.5~6m boom、with motor、reducer、crank connecting link(without spring)    | Only Support BG1000            | <b>207 360</b> |
| BG1000 Series accessories | BG1000 Boom Support                |    | φ<br>37mm-187mm*86mm*4mm Q235 Surface spray white                                                                                     | Only Support BG1000            | <b>9 072</b>   |
| BG1000 Series accessories | BG1000 Boom Clamp Plate            |    | 187mm*87mm*4mm Q235 Surface spray white                                                                                               | Only Support BG1000            | <b>2 592</b>   |
| BG1000 Series accessories | BG1000 Spring(4.5mm)               |  | φ φ<br>4.5mm* 40mm*440mm 65Mn material、 Apply to 2.5~4m boom                                                                          | Only Support BG1000            | <b>7 928</b>   |
| BG1000 Series accessories | BG1000 Spring(5.5mm)               |  | φ φ<br>4.5mm* 40mm*440mm 65Mn material、 Apply to 4.5~5m boom                                                                          | Only Support BG1000            | <b>7 928</b>   |
| BG1000 Series accessories | BG1000 Spring(6.5mm)               |  | φ φ<br>4.5mm* 40mm*440mm 65Mn material、 Apply to 4.5~5m boom                                                                          | Only Support BG1000            | <b>7 928</b>   |
| BG1000 Series accessories | BG1000 Mainboard                   |  | 180mm*120mm*37mm DC24V with protection cover、 wiring terminal                                                                         | Only Support BG1000            | <b>42 768</b>  |
| BG1000 Series accessories | BG1000 Power Supply                |  | 195mm*95mm*40mm, Input AC220V/110V±15%<br>Output DC24V10A                                                                             | Only Support BG1000            | <b>10 368</b>  |
| BG1000 Series accessories | BG1000 Backup Capacitor            |  | 115mm*60mm*35mm Input DC24V10A Output DC20V15A                                                                                        | Only Support BG1000            | <b>14 256</b>  |
| BG1000 Series accessories | BG1000 Remote Receiver             |  | 70mm*60mm*30mm 433MHz white with cable                                                                                                | Only Support BG1000            | <b>4 666</b>   |
| BG1000 Series accessories | BG1000 Remote Controller           |  | 65mm*38mm*10mm, 433MHz Learn code                                                                                                     | Only Support BG1000            | <b>4 666</b>   |
| BG1000 Series accessories | BG1000 Packaging Box               |  | 1100mm*430mm*375mm with sponge mat ZKTeco logo                                                                                        | Only Support BG1000            | <b>11 146</b>  |
| BG1000 Series accessories | BG1000 LED Boom(3m)                |  | 3m Straight boom(with LED)<br>LED power DC 12V<br>Same as CMP and BG series                                                           | BG and CMP series barrier gate | <b>66 144</b>  |
| BG1000 Series accessories | BG1000 LED Boom(4.5m)              |  | 4.5m Straight boom(with LED)<br>LED power DC 12V<br>Same as CMP and BG series                                                         | BG and CMP series barrier gate | <b>81 120</b>  |
| BG1000 Series accessories | BG1000 Folding Boom                |  | *Folding boom(without LED)<br>Boom length : L≤4.5m<br>Standard height : 2.8m<br>Need to remark total length and height limit to order | BG and CMP series barrier gate | <b>88 608</b>  |



|                           |                                                                 |                                                                                     |                                                                                                                                                        |                                |                |
|---------------------------|-----------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|----------------|
| BG1000 Series accessories | BG1000 Rubber Boom(3m)                                          |    | 3m Straight boom(with rubber strip )<br>Same as CMP and BG series                                                                                      | BG and CMP series barrier gate | <b>48 672</b>  |
| BG1000 Series accessories | BG1000 Rubber Boom(4.5m)                                        |    | 4.5m Straight boom(with rubber strip )<br>Same as CMP and BG series                                                                                    | BG and CMP series barrier gate | <b>52 416</b>  |
| BG500 Series accessories  | BG500 Chassis Package                                           |    | 350mm*305mm*1020mm With chassis body、Key、package box、ZKTeco logo                                                                                       | For BG500 series               | <b>105 581</b> |
| BG500 Series accessories  | BG500 Chassis body                                              |    | 350mm*275mm*1020mm Only gray chassis body、with key                                                                                                     | For BG500 series               | <b>77 251</b>  |
| BG500 Series accessories  | BG500 Door                                                      |    | 30*350*1010mm chassis door                                                                                                                             | For BG500 series               | <b>20 592</b>  |
| BG500 Series accessories  | BG500 Transmission Mechanism                                    |   | 200mm*230mm*370mm<br>1.5s~6s speed adjustable apply to $1m \leq L \leq 6m$ boom、include the motor, reducer, crank connecting link(without spring)      | For BG500 series               | <b>174 720</b> |
| BG500 Series accessories  | BG500 Fence Boom                                                |  | 1.0mm aluminum alloy 86*45 fence boom, boom length $L \leq 4.5m$ (can be made according to the total length of the order notes), used for BG500 series | For BG500 series               | <b>136 032</b> |
| PB4000 series accessories | PSA51(PB4060升缩杆 )<br>/PSA51(PB4060 Expansion Boom)              |  | *6m Straight Boom<br>For PB4060<br>(Main boom dimension : 86mm*45mm*3.2m, Vice-boom dimension : 80mm*38mm*3m)                                          | PB4060                         | <b>41 933</b>  |
| PB4000 series accessories | PSA52(PB4030升缩杆 )<br>/PSA52(PB4030 Expansion Boom)              |                                                                                     | *4m Straight Boom<br>For PB4030<br>(Main boom dimension : 86mm*45mm*2.1m, Vice boom dimension : 80mm*38mm*2.1m)                                        | PB4030                         |                |
| PB4000 series accessories | PSA53(PB4130折叠杆)<br>/PSA52(PB4130 Folding Boom)                 |  | *3m Folding Boom<br>For PB4130<br>The boom size : 100mm*45mm*3000mm                                                                                    | PB4130                         | <b>74 880</b>  |
| PB4000 series accessories | PSA58(PB4030带LED直杆)<br>/PSA58(PB4030 Straight Boom (with led) ) |  | *4m Straight Boom<br>For PB4030<br>4m (with LED)<br>12V need to be used with LED board                                                                 | PB4030-LED                     | <b>62 400</b>  |
| PB4000 series accessories | PB4000LED AC Adapter                                            |  | LED电源 12V/5A 78mm*110mm*37mm                                                                                                                           | PB4000LED                      | <b>11 856</b>  |
| PB4000 series accessories | PB4000LED Light board                                           |  | 12V 75mm*68mm*26mm(only red )                                                                                                                          | PB4000LED                      | <b>21 216</b>  |
| PB4000 series accessories | PB4000 motor +reducer                                           |  | 200*190*320mm motor +reducer                                                                                                                           | PB4000                         | <b>105 581</b> |
| PB4000 series accessories | PB4000主板(220V)<br>/PB4000 Control Mainboard                     |  | *Control Mainboard<br>For PB4000(220V)<br>No Remote Control Receiver,Remote Control,Hoare Limit,Capacitance                                            | PB4030<br>PB4060               | <b>47 424</b>  |
| PB4000 series accessories | PSA65-PB4000主板(110V)<br>/PB4000 Control Mainboard               |  | *Control Mainboard<br>For PB4000(110V)<br>No Remote Control Receiver,Remote Control,Hoare Limit,Capacitance                                            | PB4030<br>PB4060               | <b>47 424</b>  |
| PB4000 series accessories | 433遥控器(PB4000)<br>/433 Remote Control(PB4000)                   |  | *Remote Control<br>For PB4000<br>433MHz<br>Peach wood                                                                                                  | PB4030<br>PB4060               | <b>3 245</b>   |
| PB4000 series accessories | 传感器(PB4000)<br>/Sensor(PB4000)                                  |  | Motor Limit Sensor                                                                                                                                     | PB4030<br>PB4060               | <b>8 861</b>   |
| PB4000 series accessories | 遥控接收器(PB4000)<br>/Remote Control Receiver(PB4000)               |  | Remote receiver                                                                                                                                        | PB4030<br>PB4060               | <b>8 861</b>   |
| PB4000 series accessories | 霍尔限位(PB4000)<br>/Hoare Limit(PB4000)                            |  | Opening&Closing<br>Limiting Control Board                                                                                                              | PB4030<br>PB4060               | <b>8 861</b>   |
| PB4000 series accessories | PS01                                                            |  | *Photoelectric Switch<br>Detection distance: 3.5m                                                                                                      | All parking barrier            | <b>47 424</b>  |
| PB4000 series accessories | PB4000-PSA63                                                    |  | *Balance Spring<br>For PB4000 D=4.5mm L=400mm                                                                                                          | PB4000                         | <b>11 981</b>  |

|                             |                                           |                                                                                     |                                                                                          |                             |               |
|-----------------------------|-------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|-----------------------------|---------------|
| PB4000 series accessories   | PB4000-PSA64                              |    | *Balance Spring<br>For PB4000 D=5.5mm L=400mm                                            | PB4000                      | <b>11 981</b> |
| PB4000 series accessories   | PB4000 wooden box                         |    | 1012*497*399                                                                             | PB4000                      | <b>37 440</b> |
| CMP200 accessories          | CMP200 Motor Reducer(220V 3S)             |    | YN90-90 90W 220V 50/60HZ Reduction ratio40:1                                             | CMP200                      | <b>93 784</b> |
| CMP200 accessories          | CMP200 Motor Reducer(220V 6S)             |    | YN90-90 90W 220V 50/60HZ Reduction ratio75:1                                             | CMP200                      | <b>93 784</b> |
| CMP200 accessories          | CMP200 Motor Reducer(110V 3S)             |    | Y90—120 120W 110V 50/60HZ Reduction ratio40:1                                            | CMP200                      | <b>93 784</b> |
| CMP200 accessories          | CMP200 Motor Reducer(110V 6S)             |    | Y90—120 120W 110V 50/60HZ Reduction ratio 75:1                                           | CMP200                      | <b>93 784</b> |
| CMP200 accessories          | CMP200 Spring 3S                          |    | φ5.5*φ40*420mm , for 4.5m boom                                                           | CMP200                      | <b>7 928</b>  |
| CMP200 accessories          | CMP200 Spring 6S                          |  | φ6.5*φ40*420mm for 6m boom                                                               | CMP200                      | <b>7 928</b>  |
| CMP200 accessories          | CMP200 Chassis                            |  | 350*272*893mm                                                                            | CMP200                      | <b>61 666</b> |
| CMP200 accessories          | CMP200 Chassis Cover                      |  | 352*275*195mm                                                                            | CMP200                      | <b>16 518</b> |
| CMP200 accessories          | CMP200 Door(with led)                     |  | led door<br>350*1000*25mm Panel, light bar, lock and key                                 | CMP200                      | <b>24 226</b> |
| CMP200 accessories          | CMP200 Mainboard(220V)                    |  | 220V<br>200*120*60mm                                                                     | CMP200                      | <b>42 395</b> |
| CMP200 accessories          | CMP200 Mainboard(110V)                    |  | 110V<br>200*120*60mm                                                                     | CMP200                      | <b>42 395</b> |
| CMP200 accessories          | CMP200 Remote Receiver                    |  | 72*60*30mm length 950mm                                                                  | CMP200                      | <b>3 964</b>  |
| CMP200 accessories          | CMP200 Remote Control                     |  | remote control *1<br>62*38*15mm 430Mhz                                                   | CMP200                      | <b>3 304</b>  |
| CMP200 accessories          | CMP200 Hall Limiter                       |  | 47*45*3mm length 1000mm                                                                  | CMP200                      | <b>3 964</b>  |
| CMP200 accessories          | CMP200 LED                                |  | DC12V length 1400mm With terminal<br>Lead length ≥200mm                                  | CMP200                      | <b>11 672</b> |
| CMP200 accessories          | CMP200 LED AC Adapter                     |  | S-60W 110*80*35mm 12V 5A                                                                 | CMP200                      | <b>6 387</b>  |
| CMP200 accessories          | CMP200 Telescopic Boom (4.5m)             |  | 2.5m+2.2m<br>weight : 3.5kg                                                              | CMP200                      | <b>32 595</b> |
| CMP200 accessories          | CMP200 Telescopic Boom (6m)               |  | 3.2m+3m<br>weight : 4.5kg                                                                | CMP200                      | <b>36 339</b> |
| CMP200 accessories          | CMP200 Telescopic Boom Bracket            |  | height : 0.77m——1.1m<br>support adjust                                                   | For all series barrier gate | <b>8 809</b>  |
| CMP200 accessories          | CMP200 Packing Carton                     |  | Barrier backage with liner<br>400mm * 375mm * 1100mm<br>ZKTeco LOGO                      | For CMP200                  | <b>9 470</b>  |
| Parking barrier accessories | 3 meters straight boom wooden box (1 pcs) |  | For 3meters straight boom<br>support 1 pcs boom<br>L*W*H (mm*mm*mm) : 3150*160*120       | All parking barrier         | <b>13 719</b> |
| Parking barrier accessories | 3 meters straight boom wooden box (2 pcs) |  | For 3meters straight boom<br>only support 2 pcs booms<br>L*W*H (mm*mm*mm) : 3150*320*120 | All parking barrier         | <b>21 739</b> |
| Parking barrier accessories | 3 meters straight boom wooden box (4 pcs) |  | For 3meters straight boom<br>support 4 pcs booms<br>L*W*H (mm*mm*mm) : 3150*320*200      | All parking barrier         | <b>25 960</b> |
| Parking barrier accessories | 3 meters straight boom wooden box (6 pcs) |  | For 3meters straight boom<br>only 6 pcs boom<br>L*W*H (mm*mm*mm) : 3150*320*300          | All parking barrier         | <b>31 237</b> |
| Parking barrier accessories | 3 meters straight boom wooden box (8 pcs) |  | For 3meters straight boom<br>support 8 pcs boom<br>L*W*H (mm*mm*mm) : 3150*320*400       | All parking barrier         | <b>36 513</b> |



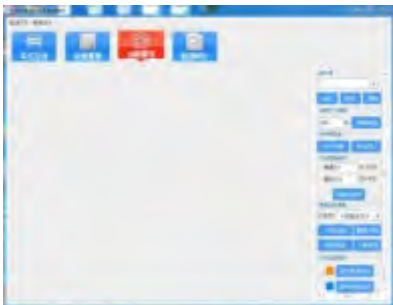



|                             |                                              |                                                                                     |                                                                                      |                     |               |
|-----------------------------|----------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------|---------------|
| Parking barrier accessories | 3 meters straight boom wooden box (10 pcs)   |    | For 3meters straight boom support 10 pcs boom<br>L*W*H (mm*mm*mm) : 3150*320*500     | All parking barrier | <b>41 790</b> |
| Parking barrier accessories | 4 meters telescope boom wooden box (1 pcs)   |    | For 4 meters telescope boom support 1 pcs boom<br>L*W*H (mm*mm*mm) : 2700*140*120    | All parking barrier | <b>10 975</b> |
| Parking barrier accessories | 4 meters telescope boom wooden box (2 pcs)   |    | For 4 meters telescope boom support 2 pcs boom<br>L*W*H (mm*mm*mm) : 2700*280*120    | All parking barrier | <b>16 885</b> |
| Parking barrier accessories | 4 meters telescope boom wooden box (4 pcs)   |    | For 4 meters telescope boom support 4 pcs boom<br>L*W*H (mm*mm*mm) : 2700*280*200    | All parking barrier | <b>20 684</b> |
| Parking barrier accessories | 4 meters telescope boom wooden box (6 pcs)   |    | For 4 meters telescope boom support 6 pcs boom<br>L*W*H (mm*mm*mm) : 2700*280*300    | All parking barrier | <b>25 116</b> |
| Parking barrier accessories | 4 meters telescope boom wooden box (8 pcs)   |    | For 4 meters telescope boom support 8 pcs boom<br>L*W*H (mm*mm*mm) : 2700*280*400    | All parking barrier | <b>29 548</b> |
| Parking barrier accessories | 4 meters telescope boom wooden box (10 pcs)  |    | For 4 meters telescope boom support 10 pcs boom<br>L*W*H (mm*mm*mm) : 2700*280*500   | All parking barrier | <b>34 192</b> |
| Parking barrier accessories | 4.5 meters straight boom wooden box (1 pcs)  |    | For 4.5 meters straight boom support 1 pcs boom<br>L*W*H (mm*mm*mm) : 4650*160*120   | All parking barrier | <b>20 051</b> |
| Parking barrier accessories | 4.5 meters straight boom wooden box (2 pcs)  |    | For 4.5 meters straight boom support 2 pcs boom<br>L*W*H (mm*mm*mm) : 4650*320*120   | All parking barrier | <b>31 659</b> |
| Parking barrier accessories | 4.5 meters straight boom wooden box (4 pcs)  |    | For 4.5 meters straight boom support 4 pcs boom<br>L*W*H (mm*mm*mm) : 4650*320*200   | All parking barrier | <b>37 780</b> |
| Parking barrier accessories | 4.5 meters straight boom wooden box (6 pcs)  |   | For 4.5 meters straight boom support 6 pcs boom<br>L*W*H (mm*mm*mm) : 4650*320*300   | All parking barrier | <b>45 378</b> |
| Parking barrier accessories | 4.5 meters straight boom wooden box (8 pcs)  |  | For 4.5 meters straight boom support 8 pcs boom<br>L*W*H (mm*mm*mm) : 4650*320*400   | All parking barrier | <b>52 976</b> |
| Parking barrier accessories | 4.5 meters straight boom wooden box (10 pcs) |  | For 4.5 meters straight boom support 8 pcs boom<br>L*W*H (mm*mm*mm) : 4650*320*500   | All parking barrier | <b>60 363</b> |
| Parking barrier accessories | 6 meters telescope boom wooden box (1 pcs)   |  | For 6 meters telescope boom support 1 pcs boom<br>L*W*H (mm*mm*mm) : : 3650*140*120  | All parking barrier | <b>14 774</b> |
| Parking barrier accessories | 6 meters telescope boom wooden box (2 pcs)   |  | For 6 meters telescope boom support 2 pcs boom<br>L*W*H (mm*mm*mm) : : 3650*280*120  | All parking barrier | <b>22 794</b> |
| Parking barrier accessories | 6 meters telescope boom wooden box (4 pcs)   |  | For 6 meters telescope boom support 4 pcs boom<br>L*W*H (mm*mm*mm) : : 3650*280*200  | All parking barrier | <b>27 438</b> |
| Parking barrier accessories | 6 meters telescope boom wooden box (6 pcs)   |  | For 6 meters telescope boom support 6 pcs boom<br>L*W*H (mm*mm*mm) : : 3650*280*300  | All parking barrier | <b>33 347</b> |
| Parking barrier accessories | 6 meters telescope boom wooden box (8 pcs)   |  | For 6 meters telescope boom support 8 pcs boom<br>L*W*H (mm*mm*mm) : : 3650*280*400  | All parking barrier | <b>39 679</b> |
| Parking barrier accessories | 6 meters telescope boom wooden box (10 pcs)  |  | For 6 meters telescope boom support 10 pcs boom<br>L*W*H (mm*mm*mm) : : 3650*280*500 | All parking barrier | <b>45 377</b> |
| Parking barrier accessories | 4 meters straight boom wooden box (1 pcs)    |  | For 4 meters straight boom support 1 pcs boom<br>L*W*H (mm*mm*mm) : 4100*140*120     | All parking barrier | <b>16 462</b> |
| Parking barrier accessories | 4 meters straight boom wooden box (2 pcs)    |  | For 4 meters straight boom support 2 pcs boom<br>L*W*H (mm*mm*mm) : 4100*280*120     | All parking barrier | <b>25 327</b> |
| Parking barrier accessories | 4 meters straight boom wooden box (4 pcs)    |  | For 4 meters straight boom support 4 pcs boom<br>L*W*H (mm*mm*mm) : 4100*280*200     | All parking barrier | <b>30 814</b> |
| Parking barrier accessories | 4 meters straight boom wooden box (6 pcs)    |  | For 4 meters straight boom support 6 pcs boom<br>L*W*H (mm*mm*mm) : 4100*280*300     | All parking barrier | <b>37 357</b> |
| Parking barrier accessories | 4 meters straight boom wooden box (8 pcs)    |  | For 4 meters straight boom support 8 pcs boom<br>L*W*H (mm*mm*mm) : 4100*280*400     | All parking barrier | <b>44 111</b> |
| Parking barrier accessories | 4 meters straight boom wooden box (10 pcs)   |  | For 4 meters straight boom support 8 pcs boom<br>L*W*H (mm*mm*mm) : 4100*280*500     | All parking barrier | <b>50 654</b> |
| Parking barrier accessories | 3 meter folding boom wooden box (1 pcs)      |  | For 3 meter folding boom support 1 pcs boom<br>L*W*H (mm*mm*mm) : 1850*200*200       | All parking barrier | <b>11 819</b> |
| Parking barrier accessories | 3 meter folding boom wooden box (2 pcs)      |  | For 3 meter folding boom support 2 pcs boom<br>L*W*H (mm*mm*mm) : 1850*400*200       | All parking barrier | <b>18 151</b> |
| Parking barrier accessories | 3 meter folding boom wooden box (4 pcs)      |  | For 3 meter folding boom support 4 pcs boom<br>L*W*H (mm*mm*mm) : 1850*400*400       | All parking barrier | <b>24 905</b> |
| Parking barrier accessories | 3 meter folding boom wooden box (6 pcs)      |  | For 3 meter folding boom support 6 pcs boom<br>L*W*H (mm*mm*mm) : 1850*400*600       | All parking barrier | <b>31 659</b> |



| Прайс-лист парковочных замков |              |         |                                                                                   |                                                                                                                                                              |              |
|-------------------------------|--------------|---------|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| Тип 1                         | Тип 2        | Модель  | Фото                                                                              | Параметры                                                                                                                                                    | Цена розница |
| Standalone device             | Parking lock | Plock 1 |  | *First generation parking lock<br>1.Remote control, distance:0-20m ;<br>2.AC Adapter:dry battery version;<br>Note:Not provide batteries                      | 69 888       |
| Standalone device             | Parking lock | Plock 2 |  | *Second generation parking lock<br>1.415MHz auto-sensing ,distance:0-15m ;<br>2.415MHz Remote control,distance:0-20m ;<br>3.AC Adapter:dry battery version ; | 83 616       |

| Прайс-лист на аксессуары для парковочных замков |           |                                                                                     |                                                                      |                        |              |
|-------------------------------------------------|-----------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------|------------------------|--------------|
| Тип                                             | Модель    | Фото                                                                                | Параметры                                                            | Совместимое устройство | Цена розница |
| Accessories of Parking lock                     | RC 1      |    | <b>Plock 1 remote control</b><br>Distance:0-20m;                     | Plock1                 | 2 995        |
| Accessories of Parking lock                     | RC 2      |    | <b>*Plock 2 remote control</b><br>Distance:0-20m;                    | Plock2                 | 5 853        |
| Accessories of Parking lock                     | Key 1     |    | <b>*Plock 1 Key</b><br>Two key with lock core                        | Plock1                 | 1 747        |
| Accessories of Parking lock                     | Key 2     |   | <b>*Plock 2 Key</b><br>Two key with lock core                        | Plock2                 | 2 371        |
| Accessories of Parking lock                     | Sensor 2  |  | <b>*Plock2 Sensor</b><br>Sensing distance:≤15m;<br>Frequency:415MHz; | Plock2                 | 4 268        |
| Accessories of Parking lock                     | CB 2      |  | <b>Plock2 control board</b>                                          | Plock2                 | 8 736        |
| Accessories of Parking lock                     | PEB 2     |  | <b>Plock2 Photoelectric board</b>                                    | Plock2                 | 3 120        |
| Accessories of Parking lock                     | Speaker 2 |  | <b>Plock2 Speaker</b>                                                | Plock2                 | 3 120        |
| Accessories of Parking lock                     | Arm 2     |  | <b>Plock2 Arm</b>                                                    | Plock2                 | 8 736        |

Прайс лист на дополнительные оборудования для парковки

| Тип 1             | Тип 2                                        | Модель       | Фото                                                                                | Параметры                                                                                                                                                                                                                                                                                             | Цена розница |
|-------------------|----------------------------------------------|--------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| Standalone device | software                                     | PGS-software |   | <b>Management Software</b><br>Develped by Java Language,MySQL database                                                                                                                                                                                                                                |              |
| Standalone device | Master controller                            | PGS-MC       |   | <b>Master controller</b><br>communication: Uplink:10/100BaseT Ethernet ;<br>Downlink:1 CAN@20kbps ;<br>Operation voltage : AC 110V to 240V;<br>Capacity : 62 unit of SC;<br>Operation temperature : -20 -65 ;<br>Case dimension : 350*150*300mm;                                                      | 284 544      |
| Standalone device | Section Controller                           | PGS-SC       |  | <b>Section Controller</b><br>communication: Uplink:1 CAN @12.25kbps ;<br>Downlink:4 bus RS485@9600bps ;<br>Operation voltage : AC 110V to 240V;<br>Capacity : 80 unit of SD;<br>Operation temperature : -20 -65 ;<br>Case dimension : 350*150*300mm;                                                  | 267 072      |
| Standalone device | Ultrasonic parking space detector            | PGS-SD       |  | <b>Ultrasonic parking space detector</b><br>Power supply : DC10-28V; °C °C<br>Communication Port : RS485 ;<br>Operation temperature : -20 -65 ;<br>Detecting range: 50CM-350CM;<br>Dimension: φ111* 49mm(H) ;<br>Mounting: Hoisting;                                                                  | 31 200       |
| Standalone device | Parking space indicator                      | PGS-SI       |  | <b>Parking space indicator</b><br>LED quantity : 8 red 8green; °C °C<br>Outer shell material : ABS;<br>Operation temperature : -20 -65 ;<br>Visual angle : 180 degree ;<br>Visual rangre : <30M ;                                                                                                     | 7 488        |
| Standalone device | Integrated Ultrasonic parking space detector | PGS-ISD      |  | <b>Integrated Ultrasonic parking space detector</b><br>Power supply : DC12-28V; °C °C<br>Communication Port : RS485 ;<br>Operation temperature : -20 -65 ;<br>Detecting range: 50CM-350CM;<br>Dimension: φ120mm*125mm ;<br>Mounting: Hoisting;                                                        | 37 440       |
| Standalone device | Entry parking guidance Display Screen        | PGS-DS       |  | <b>Entry parking guidance Display Screen</b><br>Power supply : AC 110V to 240V; °C<br>Communication Port : RS485 ;<br>Operation temperature : -20 -65 ;<br>Number of digits displayed: 3-4 digits<br>LED dot matrix : 640mm*160mm ;<br>Size : 2000X750X200mm;                                         | 943 488      |
| Standalone device |                                              | PGS-DS-02    |                                                                                     | <b>Entry parking guidance Display Screen</b><br>Power supply : AC 110V to 240V; °C<br>Communication Port : RS485 ;<br>Operation temperature : -20 -65 ;<br>Number of digits displayed: 3-4 digits<br>LED dot matrix: <b>two lines display</b> ,320mm*160mm for each lines<br>Size : 2000X750X200mm;   | 1 045 824    |
| Standalone device |                                              | PGS-DS-03    |                                                                                     | <b>Entry parking guidance Display Screen</b><br>Power supply : AC 110V to 240V; °C<br>Communication Port : RS485 ;<br>Operation temperature : -20 -65 ;<br>Number of digits displayed: 3-4 digits<br>LED dot matrix: <b>three lines display</b> ,320mm*160mm for each lines<br>Size : 2000X750X200mm; | 1 149 408    |



|                   |                                                  |               |                                                                                     |                                                                                                                                                                                                                                                                                                    |           |
|-------------------|--------------------------------------------------|---------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| Standalone device |                                                  | PGS-DS-04     |                                                                                     | <b>Entry parking guidance Display Screen</b><br>Power supply : AC 110V to 240V;℃<br>Communication Port : RS485 ;<br>Operation temperature : -20 -65 ;<br>Number of digits displayed: 3-4 digits<br>LED dot matrix: <b>four lines display</b> ,320mm*160mm for each lines<br>Size : 2000X750X200mm; | 1 211 808 |
| Standalone device |                                                  | PGS-DS-05     |                                                                                     | <b>Entry parking guidance Display Screen</b><br>Power supply : AC 110V to 240V;℃<br>Communication Port : RS485 ;<br>Operation temperature : -20 -65 ;<br>Number of digits displayed: 3-4 digits<br>LED dot matrix: <b>five lines display</b> ,320mm*160mm for each lines<br>Size : 2000X750X200mm; | 1 361 568 |
| Standalone device | Remote                                           | PGS-Remote    |    | <b>Remote</b><br>Used to set the address ,distance and working mode for the space detector                                                                                                                                                                                                         | 49 920    |
| Standalone device | Unidirection hoisting guidance display Screen    | PGS-DS1       |    | <b>Unidirection hoisting guidance display Screen</b><br>Power supply : AC 110V to 240V;℃<br>Communication Port : RS485 ;<br>Operation temperature : -20 -65 ;<br>LED dot matrix : 608mm*152mm<br><br>Dimension: 1065mm*270mm*90mm :                                                                | 149 760   |
| Standalone device | Bidirection hoisting guidance display Screen     | PGS-DS2       |  | <b>Bidirection hoisting guidance display Screen</b><br>Power supply : AC 110V to 240V;℃<br>Communication Port : RS485 ;<br>Operation temperature : -20 -65 ;<br>LED dot matrix : 912mm*152mm<br><br>Dimension: 1370mm*270mm*90mm :                                                                 | 230 880   |
| Standalone device | Three direction hoisting guidance display Screen | PGS-DS3       |  | <b>Three direction hoisting guidance display Screen</b><br>Power supply : AC220V;   ℃   ℃<br>Communication Port : RS485 ;<br>Operation temperature : -20 -65 ;<br>LED dot matrix : 1216mm*152mm<br><br>Dimension: 1680mm*270mm*90mm :                                                              | 312 000   |
| Standalone device | RS485 To USB Converter                           | PGS-Converter |  | <b>RS485 To USB Converter</b><br>Used to configure the parameter of the display                                                                                                                                                                                                                    | 24 960    |

| Прайс-лист на LPR камеры с функцией распознавания номеров |            |                  |                                                                                   |                                                                                                                |              |
|-----------------------------------------------------------|------------|------------------|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|--------------|
| Тип 1                                                     | Тип 2      | Модель           | Фото                                                                              | Параметры                                                                                                      | Цена розница |
| Standalone Device                                         | LPR camera | LPRC300(MMR      |  | License Plate Recognition Camera<br>ZKTeco Logo;<br>3M pixels<br>Myanmar LPR algorithm ; Based on CV500 chip   | 398 112      |
| Standalone Device                                         | LPR camera | LPRC300(TH<br>A) |                                                                                   | * License Plate Recognition Camera<br>ZKTeco Logo;<br>3M pixels<br>Tailand LPR algorithm ; Based on CV500 chip | 398 112      |
| Standalone Device                                         | LPR camera | LPRC200(VN<br>M) |                                                                                   | License Plate Recognition Camera<br>ZKTeco Logo;<br>Vietnam LPR algorithm ;                                    | 398 112      |
| Standalone Device                                         | LPR camera | LPRC200(RU<br>S) |                                                                                   | License Plate Recognition Camera<br>ZKTeco Logo;<br>Russia LPR algorithm ;                                     | 398 112      |
| Standalone Device                                         | LPR camera | LPRC200(KH<br>M) |                                                                                   | License Plate Recognition Camera<br>ZKTeco Logo;<br>Cambodia LPR algorithm ;                                   | 398 112      |
| Standalone Device                                         | LPR camera | LPRC200(MM<br>R) |                                                                                   | License Plate Recognition Camera<br>ZKTeco Logo;<br>Myanmar LPR algorithm ;                                    | 398 112      |
| Standalone Device                                         | LPR camera | LPRC200(DU<br>B) |                                                                                   | License Plate Recognition Camera<br>ZKTeco Logo;<br>Dubai LPR algorithm ;                                      | 398 112      |
| Standalone Device                                         | LPR camera | LPRC200(AR<br>G) |                                                                                   | License Plate Recognition Camera<br>ZKTeco Logo;<br>Argentina LPR algorithm ;                                  | 398 112      |
| Standalone Device                                         | LPR camera | LPRC200(EY<br>G) |                                                                                   | * License Plate Recognition Camera<br>ZKTeco Logo;<br>Egypt LPR algorithm;                                     | 398 112      |
| Standalone Device                                         | LPR camera | LPRC200(BR<br>A) |                                                                                   | * License Plate Recognition Camera<br>ZKTeco Logo;<br>Brazil LPR algorithm;                                    | 398 112      |
| Standalone Device                                         | LPR camera | LPRC200(IDN<br>) |                                                                                   | * License Plate Recognition Camera<br>*ZKTeco Logo;<br>*Indonesia LPR algorithm;                               | 398 112      |

|                   |                        |               |  |                                                                                                                                                                                                         |         |
|-------------------|------------------------|---------------|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Standalone Device | LPR camera             | LPRC200(TUR)  |  | * License Plate Recognition Camera<br>*ZKTeco Logo;<br>*Turkey LPR algorithm;                                                                                                                           | 398 112 |
| Standalone Device | LPR camera             | LPRC200(SAU)  |  | * License Plate Recognition Camera<br>*ZKTeco Logo;<br>*Saudi Arabia LPR algorithm;                                                                                                                     | 398 112 |
| Standalone Device | LPR camera             | LPRC200(COL)  |  | * License Plate Recognition Camera<br>*ZKTeco Logo;<br>*Colombia LPR algorithm;                                                                                                                         | 398 112 |
| Standalone Device | LPR camera             | LPRC200(MNG)  |  | * License Plate Recognition Camera<br>ZKTeco Logo;<br>Mongolia LPR algorithm;                                                                                                                           | 398 112 |
| Standalone Device | LPR camera             | LPRC200(PER)  |  | * License Plate Recognition Camera<br>ZKTeco Logo;<br>Peru LPR algorithm ;                                                                                                                              | 398 112 |
| Standalone Device | LPR camera             | LPRC200(MEX)  |  | * License Plate Recognition Camera<br>ZKTeco Logo;<br>Mexico LPR algorithm;                                                                                                                             | 398 112 |
| Standalone Device | LPR camera             | LPRC200(RSA)  |  | * License Plate Recognition Camera<br>ZKTeco Logo;<br>South Africa LPR algorithm;                                                                                                                       | 398 112 |
| Standalone Device | LPR camera             | LPRC200(THA)  |  | * License Plate Recognition Camera<br>ZKTeco Logo;<br>Korea LPR algorithm ;                                                                                                                             | 398 112 |
| Standalone Device | LPR camera             | LPRC200(MYS)  |  | * License Plate Recognition Camera<br>ZKTeco Logo;<br>Malaysia LPR algorithm                                                                                                                            | 398 112 |
| Standalone Device | LPR camera             | LPRC200(IRN)  |  | * License Plate Recognition Camera<br>ZKTeco Logo;<br>Iran LPR algorithm;                                                                                                                               | 398 112 |
| Standalone Device | LPR camera             | LPRC200(CHL)  |  | * License Plate Recognition Camera<br>ZKTeco Logo;<br>Chile LPR algorithm;                                                                                                                              | 398 112 |
| Standalone Device | LPR Integrated Machine | LPRS1000(VNM) |  | * License Plate Recognition Integrated Machine<br>Integrated of LPR camera,display screen,fill light and fixed column<br>ZKTeco Logo;<br>Vietnam LPR algorithm;<br>Vietnam voice broadcast and display; | 622 752 |
| Standalone Device | LPR Integrated Machine | LPRS1000(RUS) |  | * License Plate Recognition Integrated Machine<br>Integrated of LPR camera,display screen,fill light and fixed column<br>ZKTeco Logo;<br>Russia LPR algorithm;<br>Russia voice broadcast and display;   | 622 752 |



|                   |                        |                |
|-------------------|------------------------|----------------|
| Standalone Device | LPR Integrated Machine | LPRS1000(KHM)  |
| Standalone Device | LPR Integrated Machine | LPRS1000(MMR)  |
| Standalone Device | LPR Integrated Machine | LPRS1000(DUB)  |
| Standalone Device | LPR Integrated Machine | LPRS1000 (ARG) |
| Standalone Device | LPR Integrated Machine | LPRS1000 (EGY) |
| Standalone Device | LPR Integrated Machine | LPRS1000 (PAK) |
| Standalone Device | LPR Integrated Machine | LPRS1000 (BRA) |
| Standalone Device | LPR Integrated Machine | LPRS1000 (COL) |
| Standalone Device | LPR Integrated Machine | LPRS1000 (KOR) |
| Standalone Device | LPR Integrated Machine | LPRS1000 (MYS) |
| Standalone Device | LPR Integrated Machine | LPRS1000 (USA) |
| Standalone Device | LPR Integrated Machine | LPRS1000 (MNG) |
| Standalone Device | LPR Integrated Machine | LPRS1000 (BGD) |



|                                                                                                                                                                                                                            |         |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| * License Plate Recognition Integrated Machine<br>Integrated of LPR camera,display screen,fill light and fixed column<br>ZKTeco Logo;<br>Cambodia LPR algorithm;<br>English voice broadcast and display;                   | 622 752 |
| * License Plate Recognition Integrated Machine<br>Integrated of LPR camera,display screen,fill light and fixed column<br>ZKTeco Logo;<br>Myanmar LPR algorithm;<br>English voice broadcast and display;                    | 622 752 |
| * License Plate Recognition Integrated Machine<br>Integrated of LPR camera,display screen,fill light and fixed column<br>ZKTeco Logo;<br>DUBai LPR algorithm;<br>English voice broadcast and display;                      | 622 752 |
| * License Plate Recognition Integrated Machine<br>Integrated of LPR camera,display screen,fill light and fixed column<br>ZKTeco Logo;<br>Argentina LPR algorithm;<br>Latin American Spanish voice broadcast and display;   | 622 752 |
| * License Plate Recognition Integrated Machine<br>Integrated of LPR camera,display screen,fill light and fixed column<br>ZKTeco Logo;<br>Egypt LPR algorithm;<br>Egypt voice broadcast and display;                        | 622 752 |
| * License Plate Recognition Integrated Machine<br>Integrated of LPR camera,display screen,fill light and fixed column<br>ZKTeco Logo;<br>Pakistan LPR algorithm;<br>Pakistan voice broadcast and display;                  | 622 752 |
| * License Plate Recognition Integrated Machine<br>Integrated of LPR camera,display screen,fill light and fixed column<br>ZKTeco Logo;<br>Brazil LPR algorithm;<br>Portuguese voice broadcast and display;                  | 622 752 |
| * License Plate Recognition Integrated Machine<br>*Integrated of LPR camera,display screen,fill light and fixed column<br>*ZKTeco Logo<br>*Colombia LPR algorithm;<br>*Latin American Spanish voice broadcast and display; | 622 752 |
| * License Plate Recognition Integrated Machine<br>Integrated of LPR camera,display screen,fill light and fixed column<br>Korea LPR algorithm,<br>Korea voice broadcast and display;<br>Support Korea                       | 622 752 |
| * License Plate Recognition Integrated Machine<br>Integrated of LPR camera,display screen,fill light and fixed colum<br>ZKTeco Logo;<br>Malaysia LPR algorithm;<br>English voice broadcast and display;                    | 622 752 |
| * License Plate Recognition Integrated Machine<br>Integrated of LPR camera,display screen,voice broadcast,fill light and fixed column<br>ZKTeco Logo;<br>America LPR algorithm;<br>America voice broadcast and display;    | 622 752 |
| * License Plate Recognition Integrated Machine<br>Integrated of LPR camera,display screen,fill light and fixed column<br>ZKTeco Logo;<br>Mongolia LPR algorithm;<br>Mongolia voice broadcast and display;                  | 622 752 |
| * License Plate Recognition Integrated Machine<br>Integrated of LPR camera,display screen,voice broadcast,fill light and fixed column<br>ZKTeco Logo;<br>Bengal LPR algorithm;<br>Bengal voice broadcast and display;      | 622 752 |



|                   |                        |                |
|-------------------|------------------------|----------------|
| Standalone Device | LPR Integrated Machine | LPRS1000(PER)  |
| Standalone Device | LPR Integrated Machine | LPRS1000 (MEX) |
| Standalone Device | LPR Integrated Machine | LPRS1000(RSA)  |
| Standalone Device | LPR Integrated Machine | LPRS1000(EUR)  |
| Standalone Device | LPR Integrated Machine | LPRS1000 (SAU) |
| Standalone Device | LPR Integrated Machine | LPRS1000 (THA) |
| Standalone Device | LPR Integrated Machine | LPRS1000(TUR)  |
| Standalone Device | LPR Integrated Machine | LPRS1000 (HK)  |
| Standalone Device | LPR Integrated Machine | LPRS1000(IRAN) |
| Standalone Device | LPR Integrated Machine | LPRS1000(INDN) |
| Standalone Device | LPR Integrated Machine | LPRS1000 (CHL) |
| Standalone Device | LPR Integrated Machine | PRS4000(VNM)   |
| Standalone Device | LPR Integrated Machine | PRS4000(RUS)   |

|                                                                                                                                                                                                                                                                                                                   |         |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| * License Plate Recognition Integrated Machine<br>Integrated of LPR camera,display screen,fill light and fixed column<br>ZKTeco Logo;<br>Peru LPR algorithm;<br>Latin American Spanish voice broadcast and display;                                                                                               | 622 752 |
| * License Plate Recognition Integrated Machine<br>Integrated of LPR camera,display screen,voice broadcast,fill light and fixed column<br>ZKTeco Logo;<br>Mexico LPR algorithm;<br>Spanish voice broadcast and display;                                                                                            | 622 752 |
| * License Plate Recognition Integrated Machine<br>Integrated of LPR camera,display screen,fill light and fixed column<br>ZKTeco Logo;<br>South Africa LPR algorithm;<br>English voice broadcast and display;                                                                                                      | 622 752 |
| * License Plate Recognition Integrated Machine<br>Europe Version<br>Integrated of LPR camera,display screen,voice broadcast,fill light and fixed column<br>ZKTeco Logo;<br>None LPR algorithm;<br>English voice broadcast and display;<br>32M Flash Camera Module;                                                | 622 752 |
| * License Plate Recognition Integrated Machine<br>Integrated of LPR camera,display screen,voice broadcast,fill light and fixed column<br>ZKTeco Logo;<br>Saudi Arabia algorithm;<br>Arabic voice broadcast and display;                                                                                           | 622 752 |
| * License Plate Recognition Integrated Machine<br>Integrated of LPR camera,display screen,voice broadcast,fill light and fixed column<br>ZKTeco Logo;<br>Thailand LPR algorithm;<br>Thailand voice broadcast and display;                                                                                         | 622 752 |
| * License Plate Recognition Integrated Machine<br>Integrated of LPR camera,display screen,voice broadcast,fill light and fixed column<br>ZKTeco Logo;<br>Turkey LPR algorithm;<br>Turkey voice broadcast and display;                                                                                             | 622 752 |
| * License Plate Recognition Integrated Machine<br>Integrated of LPR camera,display screen,voice broadcast,fill light and fixed column<br>ZKTeco Logo;<br>Hong Kong LPR algorithm;<br>English voice broadcast and display;                                                                                         | 622 752 |
| * License Plate Recognition Integrated Machine<br>Integrated of LPR camera,display screen,fill light and fixed colum<br>ZKTeco Logo;<br>Iran LPR algorithm;<br>Farsi voice broadcast and display;                                                                                                                 | 622 752 |
| * License Plate Recognition Integrated Machine<br>Integrated of LPR camera,display screen,voice broadcast,fill light and fixed colum<br>ZKTeco Logo;<br>Indonesia LPR algorithm;<br>Indonesia voice broadcast and display;                                                                                        | 622 752 |
| * License Plate Recognition Integrated Machine<br>Integrated of LPR camera,display screen,fill light and fixed column<br>ZKTeco Logo;<br>Chile LPR algorithm;<br>Latin American Spanish voice broadcast and display;                                                                                              | 622 752 |
| *High-end License Plate Recognition Integrated Machine<br>Unibody structure with streamlined lines,<br>Color optional : traffic yellow or bright-silver<br>Integrated of LPR camera,display screen,voice broadcast,fill light ;<br>ZKTeco Logo;<br>Vietnam LPR algorithm;<br>Vietnam voice broadcast and display; | 934 752 |
| *High-end License Plate Recognition Integrated Machine<br>Unibody structure with streamlined lines,<br>Color optional : traffic yellow or bright-silver<br>Integrated of LPR camera,display screen,voice broadcast,fill light ;                                                                                   | 934 752 |

|                   |                        |               |
|-------------------|------------------------|---------------|
| Standalone Device | LPR Integrated Machine | PRS4000(KHM   |
| Standalone Device | LPR Integrated Machine | PRS4000(MMF   |
| Standalone Device | LPR Integrated Machine | PRS4000(DUB   |
| Standalone Device | LPR Integrated Machine | LPRS4000(COL) |
| Standalone Device | LPR Integrated Machine | LPRS4000(TUR) |
| Standalone Device | LPR Integrated Machine | LPRS4000(RSA) |
| Standalone Device | LPR Integrated Machine | LPRS4000(CHL) |
| Standalone Device | LPR Integrated Machine | LPRS4000(ARG) |
| Standalone Device | LPR Integrated Machine | LPRS4000(EGY) |
| Standalone Device | LPR Integrated Machine | LPRS4000(IND) |



|                                                                                                                                                                                                                                                                                                                                                  |         |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| <b>*High-end License Plate Recognition Integrated Machine</b><br>Unibody structure with streamlined lines,<br><b>Color optional : traffic yellow or bright-silver</b><br>Integrated of LPR camera,display screen,voice broadcast,fill light ;<br>ZKTeco Logo;                                                                                    | 934 752 |
| <b>*High-end License Plate Recognition Integrated Machine</b><br>Unibody structure with streamlined lines,<br><b>Color optional : traffic yellow or bright-silver</b><br>Integrated of LPR camera,display screen,voice broadcast,fill light ;<br>ZKTeco Logo;<br>Myanmar LPR algorithm;                                                          | 934 752 |
| <b>*High-end License Plate Recognition Integrated Machine</b><br>Unibody structure with streamlined lines,<br><b>Color optional : traffic yellow or bright-silver</b><br>Integrated of LPR camera,display screen,voice broadcast,fill light ;<br>ZKTeco Logo;<br>Dubai LPR algorithm;                                                            | 934 752 |
| <b>*High-end License Plate Recognition Integrated Machine</b><br>Unibody structure with streamlined lines,<br><b>Color optional : traffic yellow or bright-silver</b><br>Integrated of LPR camera,display screen,voice broadcast,fill light ;<br>ZKTeco Logo;<br>Colombia LPR algorithm;<br>Latin American Spanish viece broadcast and display;  | 934 752 |
| <b>*High-end License Plate Recognition Integrated Machine</b><br>Unibody structure with streamlined lines,<br><b>Color optional : traffic yellow or bright-silver</b><br>Integrated of LPR camera,display screen,voice broadcast,fill light ;<br>ZKTeco Logo;<br>Turkey LPR algorithm;<br>Turkey voice broadcast and display;                    | 934 752 |
| <b>*High-end License Plate Recognition Integrated Machine</b><br>Unibody structure with streamlined lines,<br><b>Color optional : traffic yellow or bright-silver</b><br>Integrated of LPR camera,display screen,voice broadcast,fill light ;<br>ZKTeco Logo;<br>South Africa LPR algorithm;<br>English voice broadcast and display;             | 934 752 |
| <b>*High-end License Plate Recognition Integrated Machine</b><br>Unibody structure with streamlined lines,<br><b>Color optional : traffic yellow or bright-silver</b><br>Integrated of LPR camera,display screen,voice broadcast,fill light ;<br>ZKTeco Logo;<br>Chile LPR algorithm;<br>Latin American Spanish voice broadcast and display;     | 934 752 |
| <b>*High-end License Plate Recognition Integrated Machine</b><br>Unibody structure with streamlined lines,<br><b>Color optional : traffic yellow or bright-silver</b><br>Integrated of LPR camera,display screen,voice broadcast,fill light ;<br>ZKTeco Logo;<br>Argentina LPR algorithm;<br>Latin American Spanish voice broadcast and display; | 934 752 |
| <b>*High-end License Plate Recognition Integrated Machine</b><br>Unibody structure with streamlined lines,<br><b>Color optional : traffic yellow or bright-silver</b><br>Integrated of LPR camera,display screen,voice broadcast,fill light ;<br>ZKTeco Logo;<br>Egypt LPR algorithm;<br>Egypt voice broadcast and display;                      | 934 752 |
| <b>*High-end License Plate Recognition Integrated Machine</b><br>Unibody structure with streamlined lines,<br><b>Color optional : traffic yellow or bright-silver</b><br>Integrated of LPR camera,display screen,voice broadcast,fill light ;<br>ZKTeco Logo;<br>Indonesia LPR algorithm;<br>Indonesia voice broadcast and display;              | 934 752 |



|                   |                                                |               |
|-------------------|------------------------------------------------|---------------|
| Standalone Device | LPR Integrated Machine                         | LPRS4000(MYS) |
| Standalone Device | LPR Integrated Machine                         | LPRS4000(PER) |
| Standalone Device | LPR Integrated Machine                         | LPRS4000(BRA) |
| Standalone Device | LPR Integrated Machine                         | LPRS4000(MNG) |
| Standalone Device | LPR Integrated Machine                         | LPRS4000(MEX) |
| Standalone Device | LPR Integrated Machine                         | LPRS4000(SAU) |
| Standalone Device | LPR Integrated Machine                         | LPRS4000(THA) |
| Standalone Device | Hybrid Recognition Vehicle Management Terminal | PRS2000(VNM)  |
| Standalone Device | Hybrid Recognition Vehicle Management Terminal | PRS2000(RUS)  |
| Standalone Device | Hybrid Recognition Vehicle Management Terminal | PRS2000(KHM)  |
| Standalone Device | Hybrid Recognition Vehicle Management Terminal | PRS2000(MMR)  |
| Standalone Device | Hybrid Recognition Vehicle Management Terminal | PRS2000(DUB)  |

|                                                                                                                                                                                                                                                                                                                                             |           |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| <b>*High-end License Plate Recognition Integrated Machine</b><br>Unibody structure with streamlined lines,<br><b>Color optional : traffic yellow or bright-silver</b><br>Integrated of LPR camera,display screen,voice broadcast,fill light ;<br>ZKTeco Logo;<br>Malaysia LPR algorithm;<br>English voice broadcast and display;            | 934 752   |
| <b>*High-end License Plate Recognition Integrated Machine</b><br>Unibody structure with streamlined lines,<br><b>Color optional : traffic yellow or bright-silver</b><br>Integrated of LPR camera,display screen,voice broadcast,fill light ;<br>ZKTeco Logo;<br>Peru LPR algorithm;<br>Latin American Spanish voice broadcast and display; | 934 752   |
| <b>*High-end License Plate Recognition Integrated Machine</b><br>Unibody structure with streamlined lines,<br><b>Color optional : traffic yellow or bright-silver</b><br>Integrated of LPR camera,display screen,voice broadcast,fill light ;<br>ZKTeco Logo;<br>Brazil LPR algorithm;<br>Portuguese voice broadcast and display;           | 934 752   |
| <b>*High-end License Plate Recognition Integrated Machine</b><br>Unibody structure with streamlined lines,<br>Color optional : traffic yellow or bright-silver<br>Integrated of LPR camera,display screen,voice broadcast,fill light ;<br>ZKTeco Logo;<br>Mongolia LPR algorithm;<br>Mongolia voice broadcast and display;                  | 934 752   |
| <b>*High-end License Plate Recognition Integrated Machine</b><br>Unibody structure with streamlined lines,<br><b>Color optional : traffic yellow or bright-silver</b><br>Integrated of LPR camera,display screen,voice broadcast,fill light ;<br>ZKTeco Logo;<br>Mexico LPR algorithm;<br>Spanish broadcast and display;                    | 934 752   |
| <b>* High-end License Plate Recognition Integrated Machine</b><br>Unibody structure with streamlined lines,<br><b>Color optional : traffic yellow or bright-silver</b><br>Integrated of LPR camera,display screen,voice broadcast,fill light ;<br>ZKTeco Logo;<br>Saudi Arabia algorithm;<br>Arabic voice broadcast and display;            | 972 192   |
| <b>*High-end License Plate Recognition Integrated Machine</b><br>Unibody structure with streamlined lines,<br><b>Color optional : traffic yellow or bright-silver</b><br>Integrated of LPR camera,display screen,voice broadcast,fill light ;<br>ZKTeco Logo;<br>Thailand LPR algorithm;<br>Thailand voice broadcast and display;           | 934 752   |
| <del><b>*Hybrid Recognition Vehicle Management Terminal</b></del><br>Integrated of long-range UHF reader and LPR camera;<br>ZKTeco Logo;<br>Vietnam LPR algorithm;<br><del>Vietnam voice broadcast and display;</del>                                                                                                                       | 1 096 992 |
| <del><b>*Hybrid Recognition Vehicle Management Terminal</b></del><br>Integrated of long-range UHF reader and LPR camera;<br>ZKTeco Logo;<br>Russia LPR algorithm;<br><del>Russia voice broadcast and display;</del>                                                                                                                         | 1 096 992 |
| <del><b>*Hybrid Recognition Vehicle Management Terminal</b></del><br>Integrated of long-range UHF reader and LPR camera;<br>ZKTeco Logo;<br>Cambodia LPR algorithm;<br><del>English voice broadcast and display;</del>                                                                                                                      | 1 096 992 |
| <del><b>*Hybrid Recognition Vehicle Management Terminal</b></del><br>Integrated of long-range UHF reader and LPR camera;<br>ZKTeco Logo;<br>Myanmar LPR algorithm;<br><del>English voice broadcast and display;</del>                                                                                                                       | 1 096 992 |
| <del><b>*Hybrid Recognition Vehicle Management Terminal</b></del><br>Integrated of long-range UHF reader and LPR camera;<br>ZKTeco Logo;<br>Dubai LPR algorithm;<br><del>English voice broadcast and display;</del>                                                                                                                         | 1 096 992 |

|                          |                                                |                |
|--------------------------|------------------------------------------------|----------------|
| <b>Standalone Device</b> | Hybrid Recognition Vehicle Management Terminal | LPRS2000(M NG) |
| <b>Standalone Device</b> | Hybrid Recognition Vehicle Management Terminal | LPRS2000(B GD) |
| <b>Standalone Device</b> | Hybrid Recognition Vehicle Management Terminal | LPRS2000(A RG) |
| <b>Standalone Device</b> | Hybrid Recognition Vehicle Management Terminal | LPRS2000(T UR) |
| <b>Standalone Device</b> | Hybrid Recognition Vehicle Management Terminal | LPRS2000(R SA) |
| <b>Standalone Device</b> | Hybrid Recognition Vehicle Management Terminal | LPRS2000(C HL) |
| <b>Standalone Device</b> | Hybrid Recognition Vehicle Management Terminal | LPRS2000(C OL) |
| <b>Standalone Device</b> | Hybrid Recognition Vehicle Management Terminal | LPRS2000(E GY) |
| <b>Standalone Device</b> | Hybrid Recognition Vehicle Management Terminal | LPRS2000(ID N) |
| <b>Standalone Device</b> | Hybrid Recognition Vehicle Management Terminal | LPRS2000(IR N) |
| <b>Standalone Device</b> | Hybrid Recognition Vehicle Management Terminal | LPRS2000(P ER) |
| <b>Standalone Device</b> | Hybrid Recognition Vehicle Management Terminal | LPRS2000(B RA) |
| <b>Standalone Device</b> | Hybrid Recognition Vehicle Management Terminal | LPRS2000(M YS) |
| <b>Standalone Device</b> | Hybrid Recognition Vehicle Management Terminal | LPRS2000(M EX) |
| <b>Standalone Device</b> | Hybrid Recognition Vehicle Management Terminal | LPRS2000(S AU) |
| <b>Standalone Device</b> | Hybrid Recognition Vehicle Management Terminal | LPRS2000(T HA) |



|                                                                                                                                                                                                               |                  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| <b>*Hybrid Recognition Vehicle Management Terminal</b><br>Integrated of long-range UHF reader and LPR camera;<br>ZKTeco Logo;<br>Mongolia LPR algorithm;<br>Mongolia voice broadcast and display;             | <b>1 096 992</b> |
| <b>*Hybrid Recognition Vehicle Management Terminal</b><br>Integrated long-range UHF reader and LPR camera;<br>ZKTeco Logo;<br>Bengal LPR algorithm;<br>Bengal voice broadcast and display;                    | <b>1 096 992</b> |
| <b>*Hybrid Recognition Vehicle Management Terminal</b><br>Integrated long-range UHF reader and LPR camera;<br>ZKTeco Logo;<br>Argentina LPR algorithm;<br>Latin American Spanish voice broadcast and display; | <b>1 096 992</b> |
| <b>*Hybrid Recognition Vehicle Management Terminal</b><br>Integrated long-range UHF reader and LPR camera;<br>ZKTeco Logo;<br>Turkey LPR algorithm;<br>Turkey voice broadcast and display;                    | <b>1 096 992</b> |
| <b>*Hybrid Recognition Vehicle Management Terminal</b><br>Integrated long-range UHF reader and LPR camera;<br>ZKTeco Logo;<br>South Africa LPR algorithm;<br>South Africa voice broadcast and display;        | <b>1 096 992</b> |
| <b>*Hybrid Recognition Vehicle Management Terminal</b><br>Integrated long-range UHF reader and LPR camera;<br>ZKTeco Logo;<br>Chile LPR algorithm;<br>Latin American Spanish voice broadcast and display;     | <b>1 096 992</b> |
| <b>*Hybrid Recognition Vehicle Management Terminal</b><br>Integrated long-range UHF reader and LPR camera;<br>ZKTeco Logo;<br>Colombia LPR algorithm;<br>Latin American Spanish voice broadcast and display;  | <b>1 096 992</b> |
| <b>*Hybrid Recognition Vehicle Management Terminal</b><br>Integrated long-range UHF reader and LPR camera;<br>ZKTeco Logo;<br>Egypt LPR algorithm;<br>Egypt voice broadcast and display;                      | <b>1 096 992</b> |
| <b>*Hybrid Recognition Vehicle Management Terminal</b><br>Integrated long-range UHF reader and LPR camera;<br>ZKTeco Logo;<br>Indonesia LPR algorithm;<br>Indonesia voice broadcast and display;              | <b>1 096 992</b> |
| <b>*Hybrid Recognition Vehicle Management Terminal</b><br>Integrated long-range UHF reader and LPR camera;<br>ZKTeco Logo;<br>Iran LPR algorithm;<br>Iran voice broadcast and display;                        | <b>1 096 992</b> |
| <b>*Hybrid Recognition Vehicle Management Terminal</b><br>Integrated long-range UHF reader and LPR camera;<br>ZKTeco Logo;<br>Peru LPR algorithm;<br>Latin American Spanish voice broadcast and display;      | <b>1 096 992</b> |
| <b>*Hybrid Recognition Vehicle Management Terminal</b><br>Integrated long-range UHF reader and LPR camera;<br>ZKTeco Logo;<br>Brazil LPR algorithm;<br>Portuguese voice broadcast and display;                | <b>1 096 992</b> |
| <b>*Hybrid Recognition Vehicle Management Terminal</b><br>Integrated long-range UHF reader and LPR camera;<br>ZKTeco Logo;<br>Malaysia LPR algorithm;<br>English voice broadcast and display;                 | <b>1 096 992</b> |
| <b>*Hybrid Recognition Vehicle Management Terminal</b><br>Integrated long-range UHF reader and LPR camera;<br>ZKTeco Logo;<br>Mexico LPR algorithm;<br>Latin American Spanish broadcast and display;          | <b>1 096 992</b> |
| <b>*Hybrid Identification Vehicle Management Terminal</b><br>Integrated long-range UHF reader and LPR camera;<br>ZKTeco Logo;<br>Saudi Arabia LPR algorithm;<br>Saudi Arabia voice broadcast and display;     | <b>1 096 992</b> |
| <b>*Hybrid Recognition Vehicle Management Terminal</b><br>Integrated long-range UHF reader and LPR camera;<br>ZKTeco Logo;<br>Thailand LPR algorithm;<br>Thailand voice broadcast and display;                | <b>1 096 992</b> |

|          |                                 |           |                                                                                   |                                                                                 |                                                                                         |
|----------|---------------------------------|-----------|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| Software | Parking Lot Management Software | ZKParking |  | * Parking Lot Management Software<br>C/S version<br>Using with LPRC100/LPRS1000 | Бесплатно (Без<br>финмодуля)<br><br>74880 (с<br>финмодулем на<br>2 входа и 2<br>выхода) |
|----------|---------------------------------|-----------|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|



Прайс-лист на LPR аксессуары

| Тип                      | Модель                   | Фото                                                                                | Параметры                                                                                                                        | Совместимое устройство           | Цена розница  |
|--------------------------|--------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|----------------------------------|---------------|
| LPR Products Accessories | LPR Fixed Column         |    | <b>*LPR Camera Fixed Column</b><br>Contain:1pcs fixed column,1pcs cardon joint,1pcs mounting bracket<br>Adjustable for 1.5m-1.8m | Use with LPRC100 series          | <b>59 904</b> |
| LPR Products Accessories | LPR Fill Light           |    | <b>*LPR Camera Fill Light</b> (With light control)<br>220V 20W<br>ZK-FLT-004                                                     | LPRS1000<br>LPRS4000<br>LPRS2000 | <b>37 440</b> |
| LPR Products Accessories | LPR6500 喇叭               |   | <b>*Speaker</b><br>WYD78F008003T-R-05 8Ω<br>10W φ48mm<br>78*78*40.5mm<br>With fixed hole                                         | LPRS1000                         | <b>1 872</b>  |
| LPR Products Accessories | LPR6500- AUDIO 接口板       |  | <b>*Voice&amp;Display Interface Board</b>                                                                                        | LPRS1000                         | <b>14 976</b> |
| LPR Products Accessories | 200万高清电动变焦镜头             |  | <b>*LPRC100 Camera Lens</b><br>2 million pixels<br>Electric zoom                                                                 | LPRC100                          | <b>16 099</b> |
| LPR Products Accessories | LPR6500万向节 (米白色)         |  | <b>*LPRS1000 Cardan Joint</b><br>for fixing camera                                                                               | LPRS1000<br>LPRS2000             | <b>4 980</b>  |
| LPR Products Accessories | LPR Display Screen(VNM)  |  | <b>*LPR Two-line LED Display Screen Blank logo</b>                                                                               | with LPR fixed column            | <b>89 856</b> |
| LPR Products Accessories | LPR Display Screen(RUS)  |                                                                                     | <b>*LPR Two-line LED Display Screen Blank logo</b>                                                                               | with LPR fixed column            | <b>89 856</b> |
| LPR Products Accessories | LPR Display Screen(KHM)  |                                                                                     | <b>*LPR Two-line LED Display Screen Blank logo</b>                                                                               | with LPR fixed column            | <b>89 856</b> |
| LPR Products Accessories | LPR Display Screen(MMR)  |                                                                                     | <b>*LPR Two-line LED Display Screen Blank logo</b>                                                                               | with LPR fixed column            | <b>89 856</b> |
| LPR Products Accessories | LPR Display Screen(DUB)  |                                                                                     | <b>*LPR Two-line LED Display Screen Blank logo</b>                                                                               | with LPR fixed column            | <b>89 856</b> |
| LPR Products Accessories | LPR Display Screen (THA) |                                                                                     | <b>*LPR Two-line LED Display Screen Blank logo</b>                                                                               | LPRS2000                         | <b>89 856</b> |
| LPR Products Accessories | LPR Display Screen (ARG) |                                                                                     | <b>*LPR Two-line LED Display Screen Blank logo</b>                                                                               | LPRS2000                         | <b>89 856</b> |
| LPR Products Accessories | LPR Display Screen (MEX) |                                                                                     | <b>*LPR Two-line LED Display Screen Blank logo</b><br>Mexico voice broadcast                                                     | LPRS2000                         | <b>89 856</b> |
| LPR Products Accessories | LPR Display Screen (CHL) |                                                                                     | <b>*LPR Two-line LED Display Screen Blank logo</b>                                                                               | LPRS2000                         | <b>89 856</b> |
| LPR Products Accessories | LPR Display Screen (COL) |                                                                                     | <b>*LPR Two-line LED Display Screen Blank logo</b>                                                                               | LPRS2000                         | <b>89 856</b> |
| LPR Products Accessories | LPR Display Screen (TUR) |                                                                                     | <b>*LPR Two-line LED Display Screen Blank logo</b>                                                                               | LPRS2000                         | <b>89 856</b> |
| LPR Products Accessories | LPR Display Screen (MNG) |                                                                                     | <b>*LPR Two-line LED Display Screen Blank logo</b>                                                                               | LPRS2000                         | <b>89 856</b> |
| LPR Products Accessories | LPR Display Screen (RSA) |                                                                                     | <b>*LPR Two-line LED Display Screen Blank logo</b>                                                                               | LPRS2000                         | <b>89 856</b> |
| LPR Products Accessories | LPR Display Screen (EGY) |                                                                                     | <b>*LPR Two-line LED Display Screen Blank logo</b>                                                                               | LPRS2000                         | <b>89 856</b> |
| LPR Products Accessories | LPR Display Screen (IDN) |                                                                                     | <b>*LPR Two-line LED Display Screen Blank logo</b>                                                                               | LPRS2000                         | <b>89 856</b> |

|                             |                             |  |                                                   |          |        |
|-----------------------------|-----------------------------|--|---------------------------------------------------|----------|--------|
| LPR Products<br>Accessories | LPR Display<br>Screen (MYS) |  | *LPR Two-line LED<br>Display Screen<br>Blank logo | LPRS2000 | 89 856 |
| LPR Products<br>Accessories | LPR Display<br>Screen (IRN) |  | *LPR Two-line LED<br>Display Screen<br>Blank logo | LPRS2000 | 89 856 |
| LPR Products<br>Accessories | LPR Display<br>Screen (BRA) |  | *LPR Two-line LED<br>Display Screen<br>Blank logo | LPRS2000 | 89 856 |
| LPR Products<br>Accessories | LPR Display<br>Screen (PER) |  | *LPR Two-line LED<br>Display Screen<br>Blank logo | LPRS2000 | 89 856 |

Прайс-лист на полноростовые турникеты


| Тип                                     | Модель                 | Фото                                                                                | Параметры                                                                                                       | Цена розница |
|-----------------------------------------|------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|--------------|
| Single lane<br>Full Height<br>Turnstile | FHT2300                |    | Standard<br>three arms (120 °), SUS304 stainless steel, single lane                                             | 1 996 800    |
|                                         | FHT2311                |                                                                                     | RFID<br>three arms (120 °), SUS304 stainless steel, single lane                                                 | 2 146 560    |
|                                         | FHT2322                |                                                                                     | RFID+FP<br>three arms (120 °), SUS304 stainless steel, single lane                                              | 2 296 320    |
|                                         | FHT2400                |   | Standard<br>four arms (90 °), SUS304 stainless steel, single lane<br>(contain Driver control board, AC Adapter) | 2 246 400    |
|                                         | FHT2411                |                                                                                     | RFID<br>four arms (90 °), SUS304 stainless steel, single lane<br>(Comes with 2 RFID card readers and 1 C3-200)  | 2 396 160    |
|                                         | FHT2422                |                                                                                     | RFID+FP<br>four arms (90 °), SUS304 stainless steel, single lane<br>(Comes with 2 FR1200 and 1 inBIO260)        | 2 545 920    |
|                                         | SUS316 stainless steel |                                                                                     | optional to use SUS316 stainless steel                                                                          | 624 000      |
|                                         |                        |                                                                                     |                                                                                                                 |              |
| Daul-lane<br>Full Height<br>Turnstile   | FHT2300D               |  | Standard<br>three arms (120 °), SUS304 stainless steel, dual lane<br>(contain Driver control board, AC Adapter) | 3 931 200    |
|                                         | FHT2311D               |                                                                                     | RFID<br>three arms (120 °), SUS304 stainless steel, dual lane<br>(Comes with 4 RFID card readers and 1 C3-400)  | 4 118 400    |
|                                         | FHT2322D               |                                                                                     | RFID+FP<br>three arms (120 °), SUS304 stainless steel, dual lane<br>(Comes with 4 FR1200 Reader and 1 inBIO460) | 4 368 000    |
|                                         | FHT2400D               |  | Standard<br>four arms (90 °), SUS304 stainless steel, dual lane<br>(contain Driver control board, AC Adapter)   | 4 430 400    |
|                                         | FHT2411D               |                                                                                     | RFID<br>four arms (90 °), SUS304 stainless steel, dual lane<br>(Comes with 4 RFID card readers and 1 C3-400)    | 4 617 600    |
|                                         | FHT2422D               |                                                                                     | RFID+FP<br>four arms (90 °), SUS304 stainless steel, dual lane<br>(Comes with 4 FR1200 Reader and 1 inBIO460)   | 4 867 200    |



Прайс лист на турникеты триподы

| Тип                          | Модель     | Фото                                                                                | Параметры                                                                                                                            | Цена розница |
|------------------------------|------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|--------------|
| Drop Arm<br>Tripod Turnstile | mTS1000    |    | Standard<br>Cabinet Material is SUS304 Stainless Steel<br>Lid Material is Acrylic                                                    | 336 960      |
|                              | mTS1011    |                                                                                     | RFID<br>Cabinet Material is SUS304 Stainless Steel<br>Lid Material is Acrylic                                                        | 424 320      |
|                              | mTS1022    |                                                                                     | RFID+FP<br>Cabinet Material is SUS304 Stainless Steel<br>Lid Material is Acrylic                                                     | 586 560      |
| Drop Arm<br>Tripod Turnstile | TS1000 Pro |   | Standard<br>(contain Driver control board, AC Adapter)                                                                               | 324 480      |
|                              | TS1011 Pro |                                                                                     | RFID<br>(Comes with 2 RFID card readers and 1 C3-200)                                                                                | 411 840      |
|                              | TS1022 Pro |                                                                                     | RFID+FP<br>(Comes with 2 FR1200 and 1 inBIO260)                                                                                      | 536 640      |
|                              | TS2000 Pro |  | Standard<br>(contain Driver control board, AC Adapter)                                                                               | 424 320      |
|                              | TS2011 Pro |                                                                                     | RFID<br>(Comes with 2 RFID card readers and 1 C3-200)                                                                                | 511 680      |
|                              | TS2022 Pro |                                                                                     | RFID+FP<br>(Comes with 2 FR1200 and 1 inBIO260)                                                                                      | 636 480      |
|                              | TS5000A    |  | Motorized tripod turnstile, Tempered glass lid, SUS304 stainless steel, single lane                                                  | 873 600      |
|                              | TS5011A    |                                                                                     | Motorized tripod turnstile, Tempered glass lid, SUS304 stainless steel, single lane<br>(Comes with 2 RFID card readers and 1 C3-200) | 998 400      |
|                              | TS5022A    |                                                                                     | Motorized tripod turnstile, Tempered glass lid, SUS304 stainless steel, single lane<br>(Comes with 2 FR1500 and 1 inBIO260)          | 1 123 200    |
|                              | TS2100     |  | Standard<br>(contain Driver control board, AC Adapter)                                                                               | 499 200      |
|                              | TS2111     |                                                                                     | RFID<br>(Comes with 2 RFID card readers and 1 C3-200)                                                                                | 624 000      |
|                              | TS2122     |                                                                                     | RFID+FP<br>(Comes with 2 FR1200 and 1 inBIO260)                                                                                      | 748 800      |
|                              | TS2133     |  | Face<br>(Comes with Turnstile and Face reader installation module, without face device)                                              | 636 480      |
|                              | TS2200     |  | Standard<br>(contain Driver control board, AC Adapter)                                                                               | 1 460 160    |
|                              | TS2211     |                                                                                     | RFID<br>(Comes with 4 RFID card readers and 1 C3-400)                                                                                | 1 647 360    |
|                              | TS2222     |                                                                                     | RFID+FP<br>(Comes with 4 FR1200 and 1 inBIO460)                                                                                      | 1 834 560    |
|                              | TS1200     |  | Standard<br>(contain Driver control board, AC Adapter)                                                                               | 1 123 200    |
|                              | TS1211     |                                                                                     | RFID<br>(Comes with 4 RFID card readers and 1 C3-400)                                                                                | 1 310 400    |
|                              | TS1222     |                                                                                     | RFID+FP<br>(Comes with 4 FR1200 and 1 inBIO460)                                                                                      | 1 497 600    |

Прайс-лист на раздвижные створчатые турникеты

| Тип               | Модель                               | Фото                                                                                | Параметры                                                                                                             | Цена розница |
|-------------------|--------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|--------------|
|                   | FBL6000 Pro                          |    | Standard<br>(contain Driver control board, AC Adapter)                                                                | 2 496 000    |
|                   | FBL6011 Pro                          |                                                                                     | RFID<br>(Comes with 2 RFID card readers and 1 C3-200)                                                                 | 2 683 200    |
|                   | FBL6022 Pro                          |                                                                                     | RFID+FP<br>(Comes with 2 FR1500 & card readers and 1 inBIO260)                                                        | 2 870 400    |
|                   | FBL6033 Pro                          |    | Facial recognition<br>(based on standard comes with 2 Facedepot 7A device)                                            | 3 244 800    |
|                   | FBL6200 Pro                          |  | Standard<br>(contain Driver control board, AC Adapter)                                                                | 2 121 600    |
|                   | FBL6211 Pro                          |                                                                                     | RFID<br>(Comes with 2 RFID card readers and 1 C3-200)                                                                 | 2 308 800    |
|                   | FBL6222 Pro                          |                                                                                     | RFID+FP<br>(Comes with 2 FR1500 & card readers and 1 inBIO260)                                                        | 2 496 000    |
|                   | FBL6233 Pro                          |  | Facial recognition<br>(based on standard comes with 2 Facedepot 7A device)                                            | 2 870 400    |
|                   | FBL4000 Pro                          |  | Standard<br>(contain Driver control board, AC Adapter)                                                                | 1 310 400    |
|                   | FBL4011 Pro                          |                                                                                     | RFID<br>(Comes with 2 RFID card readers and 1 C3-200)                                                                 | 1 447 680    |
|                   | FBL4022 Pro                          |                                                                                     | RFID+FP<br>(Comes with 2 FR1200 and 1 inBIO260)                                                                       | 1 647 360    |
|                   | FBL4200 Pro                          |  | Standard<br>(contain Driver control board, AC Adapter)                                                                | 985 920      |
|                   | FBL4211 Pro                          |                                                                                     | RFID<br>(Comes with 2 RFID card readers and 1 C3-200)                                                                 | 1 123 200    |
|                   | FBL4222 Pro                          |                                                                                     | RFID+FP<br>(Comes with 2 FR1200 and 1 inBIO260)                                                                       | 1 322 880    |
| Optional Function | Flap Barrier Base                    |                                                                                     | Silvery, 16000*11000*40mm                                                                                             | 124 800      |
| Optional Function | FBA11                                |  | tempered glass lid for FBL5000/Pro                                                                                    | 68 640       |
| Customize         | 900MM wide lane for FBL4000/4200 Pro |                                                                                     | In the picture, you need one FBL4200 Pro and one FBL4000 Pro, both of them need add 374400 tr based on standard price | 374 400      |
|                   | FBL2000 Pro                          |  | Standard<br>(contain Driver control board, AC Adapter)                                                                | 1 060 800    |
|                   | FBL2011 Pro                          |                                                                                     | RFID<br>(Comes with 2 RFID card readers and 1 C3-200)                                                                 | 1 210 560    |
|                   | FBL2022 pro                          |                                                                                     | RFID+FP<br>(Comes with 2 FR1200 and 1 inBIO260)                                                                       | 1 360 320    |
|                   | FBL2200 Pro                          |  | Standard<br>(contain Driver control board, AC Adapter)                                                                | 811 200      |
|                   | FBL2211 Pro                          |                                                                                     | RFID<br>(Comes with 2 RFID card readers and 1 C3-200)                                                                 | 960 960      |
|                   | FBL2222 Pro                          |                                                                                     | RFID+FP<br>(Comes with 2 FR1200 and 1 inBIO260)                                                                       | 1 110 720    |
|                   | FBL1000 Pro                          |  | Standard<br>(contain Driver control board, AC Adapter)                                                                | 998 400      |
|                   | FBL1011 Pro                          |                                                                                     | RFID<br>(Comes with 2 RFID card readers and 1 C3-200)                                                                 | 1 148 160    |
|                   | FBL1022 Pro                          |                                                                                     | RFID+FP<br>(Comes with 2 FR1200 and 1 inBIO260)                                                                       | 1 297 920    |
|                   | FBL1200 Pro                          |  | Standard<br>(contain Driver control board, AC Adapter)                                                                | 748 800      |

|           |                                      |                                                                                   |                                                                                                                       |                  |
|-----------|--------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|------------------|
|           | FBL1211 Pro                          |   | RFID<br>(Comes with 2 RFID card readers and 1 C3-200)                                                                 | <b>898 560</b>   |
|           | FBL1222 pro                          |                                                                                   | RFID+FP<br>(Comes with 2 FR1200 and 1 inBIO260)                                                                       | <b>1 048 320</b> |
|           | FBL5000 Pro                          |  | Standard<br>(contain Driver control board, AC Adapter)                                                                | <b>3 244 800</b> |
|           | FBL5011 Pro                          |                                                                                   | RFID<br>(Comes with 2 RFID card readers and 1 C3-200)                                                                 | <b>3 369 600</b> |
|           | FBL5022 Pro                          |                                                                                   | RFID+FP<br>(Comes with 2 FR1200 and 1 inBIO260)                                                                       | <b>3 494 400</b> |
|           | FBL5200 Pro                          |  | Standard<br>(contain Driver control board, AC Adapter)                                                                | <b>2 421 120</b> |
|           | FBL5211 Pro                          |                                                                                   | RFID<br>(Comes with 2 RFID card readers and 1 C3-200)                                                                 | <b>2 545 920</b> |
|           | FBL5222 Pro                          |                                                                                   | RFID+FP<br>(Comes with 2 FR1200 and 1 inBIO260)                                                                       | <b>2 670 720</b> |
| Customize | 900MM wide lane for FBL5000/5200 Pro |                                                                                   | In the picture, you need one FBL5200 Pro and one FBL5000 Pro, both of them need add 624000 tr based on standard price | <b>624 000</b>   |



Прайс-лист на распашные створчатые турникеты

| Тип                                    | Модель               | Фото                                                                                | Параметры                                                                                                | Цена розница     |
|----------------------------------------|----------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|------------------|
| Speed Gates Turnstile with servo motor | SBTL8000             |    | Standard<br>(1.2m high barrier contain Driver control board, AC Adapter)                                 | <b>4 368 000</b> |
| Speed Gates Turnstile with servo motor | SBTL8011             |                                                                                     | RFID<br>(1.2m high barrier comes with 2 RFID card readers and 1 C3-200)                                  | <b>4 555 200</b> |
| Speed Gates Turnstile with servo motor | SBTL8022             |                                                                                     | RFID+FP<br>(1.2m high barrier comes with 2 Fingerprint & card readers and 1 inBIO260)                    | <b>4 742 400</b> |
| Speed Gates Turnstile with servo motor | SBTL8033             |                                                                                     | (1.2m high barrier standard device leave hole for facedepot 7B-CH, facial device need order separately.) | <b>4 368 000</b> |
| Speed Gates Turnstile with servo motor | SBTL8200             |   | Standard<br>(1.2m high barrier contain Driver control board, AC Adapter)                                 | <b>3 744 000</b> |
| Speed Gates Turnstile with servo motor | SBTL8211             |                                                                                     | RFID<br>(1.2m high barrier comes with 2 RFID card readers and 1 C3-200)                                  | <b>3 931 200</b> |
| Speed Gates Turnstile with servo motor | SBTL8222             |                                                                                     | RFID+FP<br>(1.2m high barrier comes with 2 Fingerprint & card readers and 1 inBIO260)                    | <b>4 118 400</b> |
| Speed Gates Turnstile with servo motor | SBTL8233             |                                                                                     | (1.2m high barrier standard device leave hole for facedepot 7B-CH, facial device need order separately.) | <b>3 744 000</b> |
| Speed Gates Turnstile with servo motor | Optional low barrier |  | 600mm wide lane(if need this optional please remark in PO)                                               | <b>Бесплатно</b> |
| Speed Gates Turnstile with servo motor | Optional ADA gates   |  | 900mm wide lane((if need this optional please remark in PO))                                             | <b>Бесплатно</b> |
| Speed Gates Turnstile with servo motor | Optional High gates  |  | 1500mm high barrier                                                                                      | <b>124 800</b>   |
| Swing Barrier                          | SBTL7000             |  | Standard<br>(contain Driver control board, AC Adapter)                                                   | <b>2 745 600</b> |
| Swing Barrier                          | SBTL7011             |                                                                                     | RFID<br>(Comes with 2 RFID card readers and PGIC                                                         | <b>3 120 000</b> |
| Swing Barrier                          | SBTL7022             |                                                                                     | RFID+FP<br>(Comes with 2 FR1500 and PGIC controller)                                                     | <b>3 244 800</b> |
| Swing Barrier                          | SBTL7200             |  | Standard<br>(contain Driver control board, AC Adapter)                                                   | <b>2 371 200</b> |
| Swing Barrier                          | SBTL7211             |                                                                                     | RFID<br>(Comes with 2 RFID card readers and PGIC                                                         | <b>2 745 600</b> |
| Swing Barrier                          | SBTL7222             |                                                                                     | RFID+FP<br>(Comes with 2 FR1500 and PGIC controller)                                                     | <b>2 870 400</b> |
| Swing Barrier                          | SBTL6000             |  | Standard<br>(contain Driver control board, AC Adapter)                                                   | <b>2 496 000</b> |
| Swing Barrier                          | SBTL6011             |                                                                                     | RFID<br>(Comes with 2 RFID card readers and 1 C3-200)                                                    | <b>2 620 800</b> |
| Swing Barrier                          | SBTL6022             |                                                                                     | RFID+FP<br>(Comes with 2 <b>FR1500</b> & card readers and 1 inBIO260)                                    | <b>2 745 600</b> |
| Swing Barrier                          | SBTL6200             |  | Standard<br>(contain Driver control board, AC Adapter)                                                   | <b>1 996 800</b> |
| Swing Barrier                          | SBTL6211             |                                                                                     | RFID<br>(Comes with 2 RFID card readers and 1 C3-200)                                                    | <b>2 246 400</b> |
| Swing Barrier                          | SBTL6222             |                                                                                     | RFID+FP<br>(Comes with 2 <b>FR1500</b> & card readers and 1 inBIO260)                                    | <b>2 371 200</b> |

|                                        |          |                                                                                     |                                                                                     |                  |
|----------------------------------------|----------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------|
| Swing Barrier                          | SBT2000S |    | Standard<br>(contain Driver control board, AC Adapter)                              | <b>686 400</b>   |
| Swing Barrier                          | SBT2011S |                                                                                     | RFID<br>(Comes with 2 RFID card readers and PGIC controller)                        | <b>873 600</b>   |
| Swing Barrier                          | SBT2022S |                                                                                     | RFID+FP<br>(Comes with 2 FR1200 and PGIC controller)                                | <b>998 400</b>   |
| Swing Barrier                          | SBT2000S |    | Standard<br>(contain Driver control board, power supply)<br><b>white color</b>      | <b>686 400</b>   |
| Swing Barrier                          | SBT2011S |                                                                                     | RFID<br>(Comes with 2 RFID card readers and PGIC controller) <b>white color</b>     | <b>873 600</b>   |
| Swing Barrier                          | SBT2022S |                                                                                     | RFID+FP<br>(Comes with 2 FR1200 and PGIC controller) <b>white color</b>             | <b>998 400</b>   |
| Swing Barrier                          | SBT2000S |    | Standard<br>(contain Driver control board, power supply)<br><b>stainless steel</b>  | <b>686 400</b>   |
| Swing Barrier                          | SBT2011S |                                                                                     | RFID<br>(Comes with 2 RFID card readers and PGIC controller) <b>stainless steel</b> | <b>873 600</b>   |
| Swing Barrier                          | SBT2022S |                                                                                     | RFID+FP<br>(Comes with 2 FR1200 and PGIC controller) <b>stainless steel</b>         | <b>998 400</b>   |
| Swing Barrier                          | SBTL5000 |    | Standard<br>(contain Driver control board, AC Adapter)                              | <b>3 369 600</b> |
| Swing Barrier                          | SBTL5011 |                                                                                     | RFID<br>(Comes with 2 RFID card readers and 1 C3-200)                               | <b>3 494 400</b> |
| Swing Barrier                          | SBTL5022 |                                                                                     | RFID+FP<br>(Comes with 2 FR1500 and 1 inBIO260)                                     | <b>3 619 200</b> |
| Swing Barrier                          | SBTL5200 |  | Standard<br>(contain Driver control board, AC Adapter)                              | <b>2 433 600</b> |
| Swing Barrier                          | SBTL5211 |                                                                                     | RFID<br>(Comes with 2 RFID card readers and 1 C3-200)                               | <b>2 558 400</b> |
| Swing Barrier                          | SBTL5222 |                                                                                     | RFID+FP<br>(Comes with 2 FR1500 and 1 inBIO260)                                     | <b>2 683 200</b> |
| Swing Barrier                          | SBTL3000 |  | Standard<br>(contain Driver control board, AC Adapter)                              | <b>1 497 600</b> |
| Swing Barrier                          | SBTL3011 |                                                                                     | RFID<br>(Comes with 2 RFID card readers and 1 C3-200)                               | <b>1 647 360</b> |
| Swing Barrier                          | SBTL3022 |                                                                                     | RFID+FP<br>(Comes with 2 FR1200 and 1 inBIO260)                                     | <b>1 797 120</b> |
| Swing Barrier                          | SBTL3200 |  | Standard<br>(contain Driver control board, AC Adapter)                              | <b>1 223 040</b> |
| Swing Barrier                          | SBTL3211 |                                                                                     | RFID<br>(Comes with 2 RFID card readers and 1 C3-200)                               | <b>1 372 800</b> |
| Swing Barrier                          | SBTL3222 |                                                                                     | RFID+FP<br>(Comes with 2 FR1200 and 1 inBIO260)                                     | <b>1 522 560</b> |
| Swing Barrier                          | SBTL2000 |  | Standard<br>(contain Driver control board, AC Adapter)                              | <b>1 497 600</b> |
| Swing Barrier                          | SBTL2011 |                                                                                     | RFID<br>(Comes with 2 RFID card readers and 1 C3-200)                               | <b>1 647 360</b> |
| Swing Barrier                          | SBTL2022 |                                                                                     | RFID+FP<br>(Comes with 2 FR1200 and 1 inBIO260)                                     | <b>1 797 120</b> |
| Swing Barrier                          | SBTL2200 |  | Standard<br>(contain Driver control board, AC Adapter)                              | <b>1 223 040</b> |
| Swing Barrier                          | SBTL2211 |                                                                                     | RFID<br>(Comes with 2 RFID card readers and 1 C3-200)                               | <b>1 372 800</b> |
| Swing Barrier                          | SBTL2222 |                                                                                     | RFID+FP<br>(Comes with 2 FR1200 and 1 inBIO260)                                     | <b>1 522 560</b> |
| Speed Gates Turnstile with servo motor | SBTL9000 |  | Standard<br>(contain Driver control board, power supply)                            | <b>5 616 000</b> |
| Speed Gates Turnstile with servo motor | SBTL9011 |                                                                                     | RFID<br>(Comes with 2 RFID card readers and PGIC controller)                        | <b>5 990 400</b> |
| Speed Gates Turnstile with servo motor | SBTL9022 |                                                                                     | RFID+FP<br>(Comes with 2 RFID+FP readers and PGIC controller)                       | <b>6 240 000</b> |
| Speed Gates Turnstile with servo motor | SBTL9200 |  | Standard<br>(contain Driver control board, power supply)                            | <b>4 992 000</b> |
| Speed Gates Turnstile with servo motor | SBTL9211 |                                                                                     | RFID<br>(Comes with 2 RFID card readers and PGIC controller)                        | <b>5 366 400</b> |
| Speed Gates Turnstile with servo motor | SBTL9222 |                                                                                     | RFID+FP<br>(Comes with 2 RFID+FP readers and PGIC controller)                       | <b>5 616 000</b> |


| Прайс-лист на безбарьерные оптические турникеты |        |                                                                                    |                                                        |              |
|-------------------------------------------------|--------|------------------------------------------------------------------------------------|--------------------------------------------------------|--------------|
| Тип                                             | Модель | Фото                                                                               | Параметры                                              | Цена розница |
| Barrier Free Optical Turnstile                  | OP1000 |   | Standard<br>(contain Driver control board, AC Adapter) | 748 800      |
|                                                 | OP1011 |                                                                                    | RFID<br>(Comes with 2 RFID card readers and 1 C3-200)  | 898 560      |
|                                                 | OP1022 |                                                                                    | RFID+FP<br>(Comes with 2 FR1500 and 1 inBIO260)        | 1 048 320    |
|                                                 | OP1200 |  | Standard<br>(contain Driver control board, AC Adapter) | 499 200      |
|                                                 | OP1211 |                                                                                    | RFID<br>(Comes with 2 RFID card readers and 1 C3-200)  | 648 960      |
|                                                 | OP1222 |                                                                                    | RFID+FP<br>(Comes with 2 FR1500 and 1 inBIO260)        | 798 720      |



Прайс-лист на дополнительные аксессуары к турникетам

| Модель             | Фото                                                                                | Параметры                                                                                                                                                          | Цена розница |
|--------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| Counter            |    | Counter for one lane enter and exit                                                                                                                                | 37 440       |
| Card box           |    | Cardbox(without reader)<br>(BOM version:A34090093_V1.4)                                                                                                            | 74 880       |
| Card box           |    | Cardbox including cardbox spart, card reader (KR101E) , box.(install on device)<br>(BOM version:A34090093_V1.5)                                                    | 124 800      |
| Barcode            |  | Barcode including FM25 barcode reader, RS232/Wiegand Converter, without controller. (install on device)                                                            | 199 680      |
| Coin Selector      |  | Coin Selector, input coin to unlock the tripod                                                                                                                     | 99 840       |
| Barcode            |  | TSP-1: Barcode including RD4500 barcode reader, RS232/Wiegand Converter, with stand pole, no controller                                                            | 336 960      |
| Card box           |  | TSP-4: Cardbox including cardbox spart, card reader, box, with stand pole(180*170*1000mm). Replacement for TSP-2                                                   | 249 600      |
| Card box           |  | TSP-2: Cardbox including cardbox spart, card reader, box, with stand pole(180*170*1000mm)                                                                          | 249 600      |
| Coin Selector      |  | TSP-3: Coin Selector, with stand pole (180*170*1000)                                                                                                               | 224 640      |
| TSA02              |  | Uface installation braket and installation plate                                                                                                                   | 74 880       |
| TSAF001            |  | Face recognition device specifically for pedestrian entrance control.<br>3-inch touch screen.<br>Face Capacity 1,500(1:N).<br>Support TCP/IP, RS232/485, USB-host. | 274 560      |
| TS20XX Series Base |                                                                                     |                                                                                                                                                                    | 124 800      |
| TS10XX Series Base |                                                                                     | Silvery, stainless steel<br>630 * 850 * 45mm                                                                                                                       | 124 800      |
| Coin Selector      |  | Coin Selector, input coin to unlock the tripod                                                                                                                     | 49 920       |
| Air Switch         |  |                                                                                                                                                                    | 4 992        |
| TSA10              |  | Fingerprint reader installation module for TS1000/TS1200                                                                                                           | 16 224       |

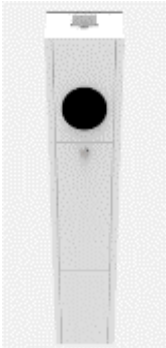


|              |                                                                                     |                                                                      |                |
|--------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------|----------------|
| <b>TSA11</b> |    | RFID reader installation module for TS1000/TS1200                    | <b>3 744</b>   |
| <b>TSA12</b> |    | Fingerprint reader installation module for TS2000                    | <b>16 224</b>  |
| <b>TSA13</b> |    | RFID reader installation module for TS2000                           | <b>18 720</b>  |
| <b>TSA14</b> |    | Fingerprint reader installation module for TS2100                    | <b>17 472</b>  |
| <b>TSA15</b> |    | RFID reader installation module for TS2100                           | <b>17 472</b>  |
| <b>TSA16</b> |    | Fingerprint reader installation module for TS2200                    | <b>21 216</b>  |
| <b>TSA17</b> |   | RFID reader installation module for TS2200                           | <b>21 216</b>  |
| <b>TSA30</b> |  | Bracket for MultiBIO700 on tripod                                    | <b>74 880</b>  |
| <b>TSA31</b> |  | Stand column for MultiBIO700                                         | <b>108 576</b> |
| <b>TSA32</b> |  | Stand column for FR1200                                              | <b>128 544</b> |
| <b>R10</b>   |  | Short handrail                                                       | <b>94 848</b>  |
| <b>R20</b>   |  | Wide handrail                                                        | <b>111 072</b> |
| <b>R30</b>   |  | Narrow handrail for glass                                            | <b>123 552</b> |
| <b>R40</b>   |  | Wide handrail for glass                                              | <b>131 040</b> |
| <b>R50</b>   |  | Stand column handrail for glass                                      | <b>117 312</b> |
| <b>TSA44</b> |  | Installation Pole for FR1200, KR502, KR100, FR1500WP(without reader) | <b>128 544</b> |
| <b>TSA72</b> |  | Installation Pole for ProID 30(without reader)                       | <b>118 560</b> |


|                         |                                                                                     |                                                                                                                                                          |         |
|-------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Barcode scanner         |    | barcode scanner for entrance products (need to connect RS232/Wiegand Converter )                                                                         | 137 280 |
| RS232/Wiegand Converter |    | HDC09-WG-232 DB9 74*40*23mm                                                                                                                              | 37 440  |
| EAC60                   |    | RFID reader plate<br>Including ProID10 reader                                                                                                            | 62 400  |
| ECA61                   |    | RFID&FP reader plate<br>Including FR1500 reader                                                                                                          | 74 880  |
| ECA62                   |    | QR reader plate<br>Including R400 QR scanner                                                                                                             | 199 680 |
| ECA63                   |    | Card box plate<br>Including the card selector                                                                                                            | 124 800 |
| ECA64                   |  | Fixed plate<br>With out reader                                                                                                                           | 31 200  |
| Top lid                 |  | Face verified fixed plate<br>Stainless steel cut a hole for the face device install, the hole position should be remarked by sales<br>6000series Top lid | 43 680  |



Прайс-лист на водонепроницаемые турникеты

| Тип                      | Модель         | Фото                                                                                | Параметры                                                                                | Цена розница |
|--------------------------|----------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|--------------|
| Water Proof<br>Turnstile | SBTL8000 WP    |    | Standard<br>(Single lane device water proof, contain Driver control board, power supply) | 4 617 600    |
|                          | SBTL8200 WP    |    | Standard<br>(Dual wing device water proof, contain Driver control board, power supply)   | 3 993 600    |
|                          | SBTL6000 WP    |  | Standard<br>(Single lane device water proof, contain Driver control board, power supply) | 2 745 600    |
|                          | SBTL6200 WP    |  | Standard<br>(Dual wing device water proof, contain Driver control board, power supply)   | 2 246 400    |
|                          | FBL6000 Pro WP |  | Standard<br>(Single lane device water proof, contain Driver control board, power supply) | 2 745 600    |
|                          | FBL6200 Pro WP |  | Standard<br>(Dual wing device water proof, contain Driver control board, power supply)   | 2 371 200    |

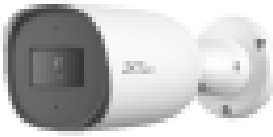
| Прайс-лист на турникеты серии Mars |            |                                                                                     |                                                                                                                                                                                                |              |
|------------------------------------|------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| Тип                                | Модель     | Фото                                                                                | Параметры                                                                                                                                                                                      | Цена розница |
|                                    | MA-PT4 W   |    | Card Collector Box with Powder Coating finish for Mars Pro-S1000 Series<br>Dimension:988*170*120<br>Material: SUS304<br>Finishing: White powder coating<br>Card cap.:200 pcs<br>Input: 24V DC  | 312 000      |
|                                    | MA-PT7 W   |  | Card Collector Box with Powder Coating finish for Mars Pro-F1000 Series.<br>Dimension:980*170*180<br>Material: SUS304<br>Finishing: White powder coating<br>Card cap.:250 pcs<br>Input: 24V DC | 312 000      |
|                                    | MA-PT4 S   |  | Card Collector Box for Mars-S1000 Series<br>Dimension:988*170*120<br>Material: SUS304<br>Finishing: NA<br>Card cap.:200 pcs<br>Input: 24V DC                                                   | 262 080      |
|                                    | MA-PT7 S   |  | Card Collector Box for Mars-B1000/F1000 Series<br>Dimension:980*170*180<br>Material: SUS304<br>Finishing: NA<br>Card cap.:250 pcs<br>Input: 24V DC                                             | 262 080      |
| Standard                           | Mars-B1000 |  | Single lane swing barrier, without access contorller                                                                                                                                           | 1 996 800    |
|                                    | Mars-B1011 |                                                                                     | Single lane swing barrier, with RFID & PGIC access contorller                                                                                                                                  | 2 371 200    |
|                                    | Mars-B1022 |                                                                                     | Single lane swing barrier, with (RFID+FP) & PGIC access contorller                                                                                                                             | 2 496 000    |
|                                    | Mars-B1200 |  | Dual lane swing barrier, without access contorller                                                                                                                                             | 1 622 400    |
|                                    | Mars-B1211 |                                                                                     | Dual lane swing barrier, with RFID & PGIC access contorller                                                                                                                                    | 1 996 800    |
|                                    | Mars-B1222 |                                                                                     | Dua lane swing barrier, with (RFID+FP) & PGIC access contorller                                                                                                                                | 2 121 600    |
|                                    | Mars-S1000 |  | Single lane swing barrier, without access contorller                                                                                                                                           | 3 120 000    |
|                                    | Mars-S1011 |                                                                                     | Single lane swing barrier, with RFID & PGIC access contorller                                                                                                                                  | 3 494 400    |
|                                    | Mars-S1022 |                                                                                     | Single lane swing barrier, with (RFID+FP) & PGIC access contorller                                                                                                                             | 3 619 200    |
|                                    | Mars-S1200 |  | Dual lane swing barrier, without access contorller                                                                                                                                             | 2 745 600    |

|                     |                                             |                                                                                     |                                                                                                                                       |                  |
|---------------------|---------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|------------------|
|                     | Mars-S1211                                  |     | Dual lane swing barrier, with RFID & PGIC access contorller                                                                           | <b>3 120 000</b> |
|                     | Mars-S1222                                  |                                                                                     | Dua lane swing barrier, with (RFID+FP) & PGIC access contorller                                                                       | <b>3 244 800</b> |
|                     | Mars-F1000                                  |    | Single lane flap barrier, without access contorller                                                                                   | <b>1 872 000</b> |
|                     | Mars-F1011                                  |                                                                                     | Single lane flap barrier, with RFID & PGIC access contorller                                                                          | <b>2 246 400</b> |
|                     | Mars-F1022                                  |                                                                                     | Single lane flap barrier, with (RFID+FP) & PGIC access contorller                                                                     | <b>2 371 200</b> |
|                     | Mars-F1200                                  |    | Dual lane flap barrier, without access contorller                                                                                     | <b>1 497 600</b> |
|                     | Mars-F1211                                  |                                                                                     | Dual lane flap barrier, with RFID & PGIC access contorller                                                                            | <b>1 872 000</b> |
|                     | Mars-F1222                                  |                                                                                     | Dua lane flap barrier, with (RFID+FP) & PGIC access contorller                                                                        | <b>1 996 800</b> |
| Optional functio    | Extension IR sensor                         | /                                                                                   | Support IR sensor extend addtion as 1 pair, Mars series max up to 12 pairs.(Please make the note in order system)                     | <b>37 440</b>    |
| Premium             | Mars Pro-S1000                              |   | Single lane swing barrier, without reader                                                                                             | <b>5 241 600</b> |
|                     | Mars Pro-S1011                              |                                                                                     | Single lane swing barrier, with RFID & PGIC access contorller                                                                         | <b>5 391 360</b> |
|                     | Mars Pro-S1022                              |                                                                                     | Single lane swing barrier, with (RFID+FP) & PGIC access contorller                                                                    | <b>5 516 160</b> |
|                     | Mars Pro-S1200                              |  | Dual lane swing barrier, without reader                                                                                               | <b>4 742 400</b> |
|                     | Mars Pro-S1211                              |                                                                                     | Dual lane swing barrier, with RFID & PGIC access contorller                                                                           | <b>4 892 160</b> |
|                     | Mars Pro-S1222                              |                                                                                     | Dua lane swing barrier, with (RFID+FP) & PGIC access contorller                                                                       | <b>5 016 960</b> |
|                     | Mars Pro-F1000                              |  | Single lane flap barrier, without access contorller                                                                                   | <b>3 744 000</b> |
|                     | Mars Pro-F1011                              |                                                                                     | Single lane flap barrier, with RFID & PGIC access contorller                                                                          | <b>4 118 400</b> |
|                     | Mars Pro-F1022                              |                                                                                     | Single lane flap barrier, with (RFID+FP) & PGIC access contorller                                                                     | <b>4 243 200</b> |
|                     | Mars Pro-F1200                              |  | Dual lane flap barrier, without access contorller                                                                                     | <b>3 244 800</b> |
|                     | Mars Pro-F1211                              |                                                                                     | Dual lane flap barrier, with RFID & PGIC access contorller                                                                            | <b>3 619 200</b> |
|                     | Mars Pro-F1222                              |                                                                                     | Dua lane flap barrier, with (RFID+FP) & PGIC access contorller                                                                        | <b>3 744 000</b> |
| Barrier accessories | Mars Pro-S1000 series and Mars-S1000 series |                                                                                     | 1 pcs glass barrier, standard lane width                                                                                              | <b>43 680</b>    |
|                     | Mars Pro-S1000 series and Mars-S1000 series |                                                                                     | 1 pcs glass barrier, wider lane width 900mm                                                                                           | <b>62 400</b>    |
|                     | Mars Pro-S1000 series                       |                                                                                     | 1 pcs glass barrier, standard lane width with higher barrier                                                                          | <b>124 800</b>   |
|                     | Mars Pro-S1000 series and Mars-S1000 series |                                                                                     | 1 pcs acrylic barrier, wider lane width 900mm                                                                                         | <b>56 160</b>    |
|                     | Mars Pro-S1000 series                       |                                                                                     | 1 pcs acrylic barrier, standard lane width with higher barrier                                                                        | <b>99 840</b>    |
|                     | Mars B1000 series                           |                                                                                     | 1 pcs glass barrier, standard lane width                                                                                              | <b>43 680</b>    |
|                     | Mars B1000 series                           |                                                                                     | 1 pcs metal barrier, wider lane width 900mm                                                                                           | <b>87 360</b>    |
|                     | Mars Pro-F1000 series and Mars-F1000 series |                                                                                     | 1 pcs glass barrier, standard lane width                                                                                              | <b>37 440</b>    |
| Optional function   | Top lid indicator                           |  | Single lane indicator with flow green LED and red flash LED, only avaiable for Mars Pro series, remark this requirement in your Order | <b>249 600</b>   |
|                     | Top lid indicator                           |  | dual wing indicator with flow green LED and red flash LED,only avaiable for Mars Pro series, remark this requirement in your Order    | <b>124 800</b>   |



Прайс-лист на билетные кассы для парковки

| Тип 1             | Тип                             | Модель     | Фото                                                                                | Параметры                                                                            | Цена розница                                                                |
|-------------------|---------------------------------|------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|
| Standalone Device | Ticket Dispenser entrance       | TBM01(KHM) |   | Ticket Dispenser Entrance<br>ZKTeco Logo;<br>Ticket machine<br>Support ID/MF Card    | 848 640                                                                     |
|                   |                                 | TBM01(COL) |                                                                                     | Ticket Dispenser Entrance<br>ZKTeco Logo;<br>Ticket machine<br>Support ID/MF Card    | 848 640                                                                     |
|                   |                                 | TBM01(RSA) |                                                                                     | Ticket Dispenser Entrance<br>ZKTeco Logo;<br>Ticket machine<br>Support ID/MF Card    | 848 640                                                                     |
|                   | Ticket Dispenser Exit           | TB02(KHM)  |  | Ticket Dispenser Exit<br>ZKTeco Logo;<br>Code scanning machine<br>Support ID/MF Card | 686 400                                                                     |
| Standalone Device |                                 | TB02(COL)  |                                                                                     | Ticket Dispenser Exit<br>ZKTeco Logo;<br>Code scanning machine<br>Support ID/MF Card | 686 400                                                                     |
| Standalone Device |                                 | TB02(RSA)  |                                                                                     | Ticket Dispenser Exit<br>ZKTeco Logo;<br>Code scanning machine<br>Support ID/MF Card | 686 400                                                                     |
| Software          | Parking Lot Management Software | ZKParking  |  | * Parking Lot Management Software<br>C/S version<br>Using with TB01/TB02             | Бесплатно (Без финмодуля)<br><br>74880 (с финмодулем на 2 входа и 2 выхода) |

| Прайс-лист на доп. оборудования к билетным кассам для парковки |                    |                                                                                     |                                                                                                                                                                                                                                                                                                                                                         |                        |              |
|----------------------------------------------------------------|--------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|--------------|
| Тип                                                            | Модель             | Фото                                                                                | Параметры                                                                                                                                                                                                                                                                                                                                               | Совместимое устройство | Цена розница |
| Ticket Dispenser Products Accessories                          | Thermal paper roll |    | 80*80mm 120g Print about 800 sheets                                                                                                                                                                                                                                                                                                                     | Ticket Dispenser       | 13 104       |
| Ticket Dispenser Products Accessories                          | UHF Reader         |    | New long distance RFID UHF reader with LED<br>Reading distance:0-8m(For Hand-held testing)<br>Reading distance:0-5m(For noncontact vehicle management)<br>Communication:Wiegand26/34,USB ,RS485(opetional)<br>Size: 308*308*67<br>ZKTeco Logo<br>unencrypted reader<br>E: means frequency band(865MHz-868MHz)<br>F: means frequency band(902MHz-906MHz) | Ticket Dispenser       | 157 248      |
| Ticket Dispenser Products Accessories                          | PSA02              |   | 220V Loop Detector                                                                                                                                                                                                                                                                                                                                      | Ticket Dispenser       | 31 200       |
| Ticket Dispenser Products Accessories                          | PSA03              |  | 100 Meters Loop                                                                                                                                                                                                                                                                                                                                         | Ticket Dispenser       | 18 720       |
| Ticket Dispenser Products Accessories                          | ZKP8001            |  | Print charge receipts 80mm thermal printer with automatic knife<br>Printing speed: 300mm/s<br>Power 24V/2.5A<br>Communication interface: USB+RS232+LAN<br>Specifications: 190*145*145mm<br>ZKLOGO                                                                                                                                                       | Ticket Dispenser       | 72 384       |
| Ticket Dispenser Products Accessories                          | ZKB202             |  | Two-dimensional imaging wireless scanner 210g<br>175mm × 72mm × 100mm ZK LOGO                                                                                                                                                                                                                                                                           | Ticket Dispenser       | 28 704       |
| Ticket Dispenser Products Accessories                          | UR20RW             |  | <b>*UHF card issuer</b><br><b>Communication:USB;</b><br><b>*Unencrypted,Blank Logo</b><br><b>RW:means reading&amp;writing EPC number(Card number)</b><br><b>E: means frequency band(865MHz-868MHz)</b><br><b>F: means frequency band(902MHz-926MH</b>                                                                                                   | All UHF Card           | 108 576      |
| Ticket Dispenser Products Accessories                          | CR20M              |  | Read and write 13.56MHz mifare card, USB interface                                                                                                                                                                                                                                                                                                      | Ticket Dispenser       | 0            |
| Cameras                                                        | BL-852T48A-S6      |  | Capture pictures                                                                                                                                                                                                                                                                                                                                        | Ticket Dispenser       | 74 880       |

Автоматика для распашных ворот

| Тип                        | Модель      | Фото                                                                                 | Параметры                                                                                                                                                                                                         | Цена розница |
|----------------------------|-------------|--------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| Sliding Gate Opener        | ZK-SL800AC  |    | Motorized Sliding Gate Opener<br>Maximum output : 370W<br>Maximum door load : 800KG<br>Limit mode : magnetic steel<br>Dimension : 271*228*280 (mm)<br>Dimension with packing : 345*285*360 (mm)<br>Weight : 13KG  | 137 280      |
|                            | ZK-SL1500AC |   | Motorized Sliding Gate Opener<br>Maximum output : 550W<br>Maximum door load : 1500KG<br>Limit mode : magnetic steel<br>Dimension : 271*228*280 (mm)<br>Dimension with packing : 345*285*360 (mm)<br>Weight : 15KG | 156 000      |
| Swing Gate Opener          | ZK-SW300DC  |  | Swing Gate Opener<br>Maximum output : 50W<br>Maximum single door load : 300KG<br>Limit mode : magnetic steel<br>Dimension (Max) : 1065*100*85 (mm)<br>Dimension with packing : 825*195*265 (mm)<br>Weight : 14KG  | 255 840      |
|                            | ZK-SW400DC  |  | Swing Gate Opener<br>Maximum output : 62W<br>Maximum single door load : 300KG<br>Limit mode : magnetic steel<br>Dimension (Max) : 1450*106*96 (mm)<br>Dimension with packing : 1070*280*305 (mm)<br>Weight : 20KG | 299 520      |
| Motorized Retractable Gate | ZK-FG-10    |   | Floding gates driver head unit<br>220V AC motor driver*2<br>400*660*1600mm<br>No guide rail                                                                                                                       | 811 200      |
|                            |             |   | Floding gates driver head unit<br>110V AC motor driver*2<br>400*660*1600mm<br>No guide rail                                                                                                                       | 898 560      |
|                            | ZK-10B      |   | Floding gates barrier per meter<br>Outer: 45*40*1.0mm<br>Inner:v45*31*0.9~1.0mm                                                                                                                                   | 106 080      |

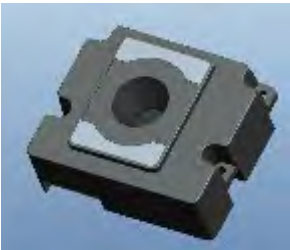


|  |          |                                                                                   |                                                                                        |                  |
|--|----------|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|------------------|
|  | ZK-FG-20 |  | Floding gates driver head<br>220V AC motor driver*2<br>370*860*1600mm<br>No guide rail | <b>1 248 000</b> |
|  |          |  | Floding gates driver head<br>110V AC motor driver*2<br>370*860*1600mm<br>No guide rail | <b>1 372 800</b> |
|  | ZK-20B   |  | Floding gates barrier per meter<br>Outer: 110*69*1.5mm<br>Inner: 45*31*1.5mm           | <b>237 120</b>   |

Прайс-лист на биометрические терминалы FaceKiosk

| Тип 1          | Тип 2               | Модель                               | Фото                                                                                | Параметры                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Цена розница |
|----------------|---------------------|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| Android Series | FaceKiosk Series    | FaceKiosk-H13A<br>13.3" wall mounted |    | Android Multipurpose Facial Recognition Kiosk<br>Wall-Mounted Style with QRCode Scanner, Face Camera and ID Card<br>Optional Function: IC Card, Elatec Card mouldle, Finger Print Sensor<br>Display: 13.3" LCD Color Touch Screen(1920*1080 pixels)<br>Memory: 2G RAM / 16G ROM<br>Communication: TCP/IP, WIFI, USB, BlueTooth<br>Communication Port: 2*USB, 1*RJ45, TF card slot, 1*HDMI, RS232 / 485<br><b>IK04 &amp; IP65</b><br><b>Operating System: Android 9.0</b><br>Power Supply: 12V-3A<br>Operating Temperature: 0 to 50°C (32 to 41°F)<br>Operating Humidity: <90% RH<br>Storage Temperature: -40 to 60°C (-40 to 140°F)<br>Storage Humidity: 20% to 90% RH<br>Dimensions (L*W*H): 323 * 25 * 268 mm(12.72 * 0.98 * 10.55 in)<br><br>Standard Firmware: Visitor Self-service Firmware<br>Software: ZKBioSecurity V5000<br>Visitor Capacity: 9,500<br>User Capacity: 500<br>Record Capacity: 100,000<br>Face Template Capacity: 10,000<br>ID/IC Card Capacity: 500 | 624 000      |
| Android Series | FaceKiosk Series    | FaceKiosk-H13C<br>13.3" upright      |  | Android Multipurpose Facial Recognition Kiosk<br>Stand Pole Style with Finger Print Sensor, Face Camera, ID Card, 80mm Label Printer and QR Code Scanner<br>Optional Function: IC Card, HID Card<br>Display: 13.3" LCD Color Screen<br>Memory: 2G RAM / 16G ROM<br>Communication: TCP/IP, WIFI, 4G, Bluetooth<br>Communication Port: 2*USB, 1*RJ45, TF card slot, 1*HDMI, RS232 / 485<br><b>Operating System: Android 9.0</b><br>Power Supply: 12V 5A<br>Operating Temperature: 0 to 50°C (32 to 41°F)<br>Operating Humidity: <90% RH<br>Storage Temperature: -40 to 60°C (-40 to 140°F)<br>Storage Humidity: 20% to 90% RH<br>354 * 50 * 1420 mm(13.94 * 1.97 * 55.91 in)<br><br>Standard Firmware: Visitor Self-service Firmware<br>Software: ZKBioSecurity V5000<br>Visitor Capacity: 9,500<br>User Capacity: 500<br>Record Capacity: 100,000<br>Face Template Capacity: 10,000<br>ID/IC Card Capacity: 500<br>SDK: Android EDK                                           | 1 872 000    |
| Android Series | MediaStation Series | MediaStation-N2                      |  | CPU: 1.2GHz Quad-core Cortex-A7 Processor<br>OS:Android 7.0<br>Memory: 1G RAM / 8G ROM<br>Communication: TCP/IP, WIFI<br>Support TF Card<br>Power Supply: 12V 3A<br>Interface: RJ45*1, USB 2.0*2, HDMI*1,Audio out*1<br>Dimensions (L*W*H): 138*98*25 (mm)<br>Net Weight : 0.12kg<br>Gross Weight : 0.15kg<br>Standard APP : ZKBioMedia                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |              |

Прайс-лист на комплектующие для FaceKiosk

| Тип    | Модель                      | Фото                                                                                | Параметры                          | Совместимое устройство                                           | Цена розница |
|--------|-----------------------------|-------------------------------------------------------------------------------------|------------------------------------|------------------------------------------------------------------|--------------|
| Model  | Camera Model                |    | 2MP camera module (with lens set)  | FaceKiosk-V43<br>FaceKiosk-V32<br>FaceKiosk-H32<br>FaceKiosk-H21 | 49 920       |
| Model  | AC Adapter Board            |    | AC Adapter board for FaceKiosk-V43 | FaceKiosk-V43                                                    | 37 440       |
| Module | ZKB10                       |   | QR code scanner module             | FaceKiosk-H13A<br>G4<br>G4[TD]<br>G4[TI]                         | 31 200       |
| Paper  | Thermal Label Printer Paper |  | Thermal Label Printer Paper        | FaceKiosk-H13C<br>FaceKiosk-H13C[TD]<br>FaceKiosk-V32T           | 4 992        |
| Module | LV4300                      |  | QR code scanner module             | FaceKiosk-H13C<br>FaceKiosk-H13C[TD]                             | 87 360       |
| Module | ZK-803Q                     |  | Thermal Ticket Printer             | FaceKiosk-H13C<br>FaceKiosk-H13C[TD]<br>FaceKiosk-V32T           | 162 240      |