

IEC 60529:1989+A1:1999+A2:2013

Measurement and Test Report

For

Quanzhou YANTON Electronics Co.,Ltd

YANTON Building,Creation Road Tuoxing Industrial ,Optoelectronics-Information Industry
Base,Xiamei Town,Nan' An City ,Fujian Province, China.

Test Model: T-650

This Report Concerns: <input checked="" type="checkbox"/> Original Report	Equipment Type: Walkie talkie
IP code: IP67	
Compiled by: Aaron Mao	
Test Date: 2021-02-02 to 2021-03-29	
Date of issue: 2021-03-29	
Reviewed by: Andrew Luo	
Prepared By: Bay Area Compliance Laboratories Corp. (Dongguan) No.12, Pulong East 1 st Road, Tangxia Town, Dongguan. Tel: +86-0769-86858888 Fax:+86-0769-86858588	

TABLE OF CONTENTS

1 - GENERAL INFORMATION	3
1.1 Product Description for Equipment under Test (EUT)	3
1.2 Objective	3
1.3 Related Submittal(s)/Grant(s)	3
1.4 Test Methodology	3
1.5 Test Equipment List	4
1.6 Equipment Under Test (EUT)	4
2 - TEST FOR FIRST CHARACTERISTICS NUMERALS 6 (IP6X) (CLAUSE 12.2+12.3 AND CLAUSE 13.4+13.6)	5
2.1 Tests for protection against access to hazardous parts indicated by the first characteristic numeral 6(CLAUSE 12.2+12.3)	5
2.1.1 Method	5
2.1.2 Results	5
2.2 Tests for protection against solid foreign objects indicated by the first characteristic numeral 6 (CLAUSE 13.4+13.6)	6
2.2.1 Method	6
2.2.2 Results	6
3 - TEST FOR PROTECTION AGAINST WATER CHARACTERISTICS NUMERALS 7(IPX7)	7
3.1 Method	7
3.2 Results	7
4 - EUT PHOTOGRAPHS	8
4.1 EUT- General view	8
4.3 EUT- Inside view: no deposit of dust was observable inside the enclosure after IP6X test (sample 1)	9
4.4 EUT- Inside view: no water accumulated inside the enclosure after IPX7 test (sample 2)	10

1 - GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

Quanzhou YANTON Electronics Co.,Ltd product, "EUT" as referred to in this report is Walkie talkie and the model is T-650.

The test samples were in good condition and received: 2021-02-01.

1.2 Objective

The following Declaration of Conformity of a device is prepared on behalf of Quanzhou YANTON Electronics Co.,Ltd in accordance with IEC 60529:1989+A1:1999+A2:2013, Degrees of protection provided by enclosures (IP code). The objective of the manufacturer is to demonstrate compliance with IEC 60529:1989+A1:1999+A2:2013. Currently, IEC 60529:1989+A1:1999+A2:2013 tests to be performed. They are as follows:

- Test for protection against object probe and for protection against solid foreign objects (IP6X) (CLAUSE 12.2+12.3 and CLAUSE 13.4+13.6);
- Test for protection against Immersing water (IPX7). (CLAUSE 14.2.7).

Data has been collected, reduced, and analyzed within this report in accordance with IEC 60529:1989+A1:1999+A2:2013. In order to demonstrate compliance, the manufacturer or a contracted laboratory makes measurements and takes the necessary steps to ensure that the equipment complies with the appropriate technical standards.

1.3 Related Submittal(s)/Grant(s)

No Related Submittals

1.4 Test Methodology

All measurements contained in this report were conducted with IEC 60529:1989+A1:1999+A2:2013, Degrees of protection provided by enclosures (IP code).

All measurement was performed at Bay Area Compliance Laboratories Corp. (Dongguan).

1.5 Test Equipment List

S/N	Manufacturer and Model	Instrument Type	Instrument I.D	Cal. Last Date	Cal. Due Date
1	FTR-3301B	Dust proof test chamber	T-08-SF063	2019-09-12	2022-09-11
2	BND-D	IP6X Test Probe	T-08-SF030	2020-02-27	2022-02-26
3	IPX7	Water tight	T-08-SF060	2021-03-04	2024-03-03
4	1500mm	Ruler	T-08-SF060-1	2018-08-08	2021-08-07
5	PWS280	Hygrothermograph	T-08-QA026	2019-03-08	2022-03-07

1.6 Equipment Under Test (EUT)

Applicant	Description	Model	Brand Name
Quanzhou YANTON Electronics Co.,Ltd	Walkie talkie	T-650	N/A
Applicant address	YANTON Building,Creation Road Tuoxing Industrial ,Optoelectronics-Information Industry Base,Xiamei Town,Nan' An City ,Fujian Province, China.		

2 - Test for first characteristics numerals 6 (IP6X) (CLAUSE 12.2+12.3 and CLAUSE 13.4+13.6)


2.1 Tests for protection against access to hazardous parts indicated by the first characteristic numeral 6(CLAUSE 12.2+12.3)

2.1.1 Method

Access probes to test the protection of persons against access to hazardous parts are given in follow figure.

- 1) The test is made using a test wire of 1.0 mm inserted through any openings of the enclosure;
- 2) The test with the force $1.0 \pm 0.1\text{N}$;
- 3) For tests on low-voltage equipment, a low-voltage supply (of not less than 40 V and not more than 50 V) in series with a suitable lamp should be connected between the probe and the hazardous parts inside the enclosure. Hazardous live parts covered only with varnish or paint, or protected by oxidation or by a similar process, are covered by a metal foil electrically connected to those parts which are normally live in operation. The signal-circuit method should also be applied to the hazardous moving parts of high-voltage equipment;
- 4) Internal moving parts may be operated slowly, where this is possible.

Test wire 1,0 mm diameter, 100 mm long

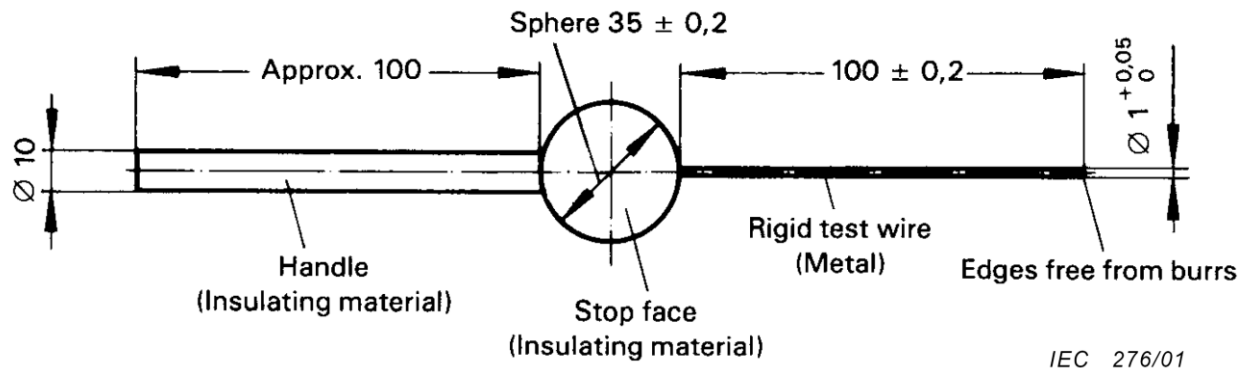

2.1.2 Results

(x) The access probe did not touch the hazardous live parts. (IP6X) (CLAUSE 12.2+12.3).


Pass

2.2 Tests for protection against solid foreign objects indicated by the first characteristic numeral 6 (CLAUSE 13.4+13.6)

2.2.1 Method

Test device to verify protection against solid foreign objects like the follow figure.

- 1) The test is made using a dust chamber incorporating the basic principle shown in the following figure;
- 2) The enclosure under test is supported inside the test chamber and the pressure inside the enclosure is maintained below the surrounding atmospheric pressure by a vacuum pump. The suction connection shall be made to a hole specially provided for this test. See the EUT photograph;
- 3) The extraction rate is about 40 times volumes of the sample enclosure and the depression of the manometer is less than 2kPa;
- 4) The test duration is 8 hours.

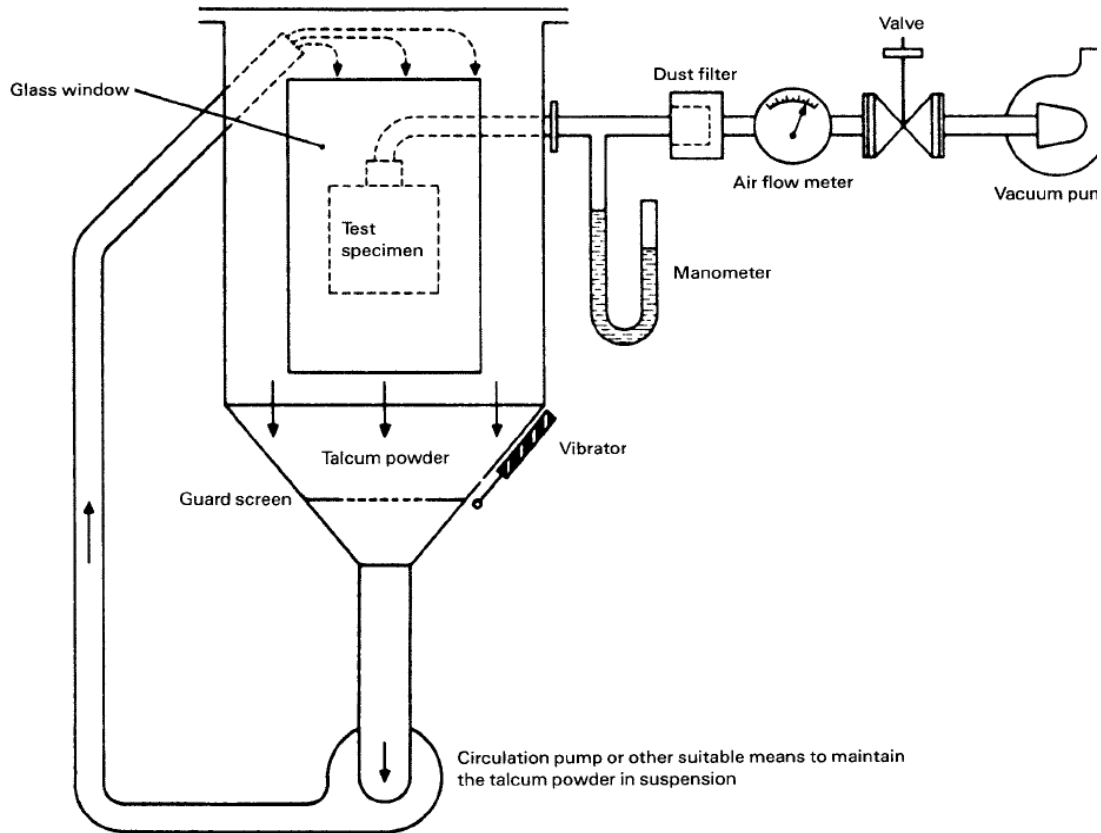

IEC 280/01

2.2.2 Results

(x) No deposit of dust was observable inside the enclosure at the end of the test. (IP6X) (CLAUSE 13.4+13.6).

Pass

3 - Test for protection against water characteristics numerals 7(IPX7)

3.1 Method

Test is made by completely immersing the enclosure in water in its service position as specified by the manufacturer so that the following conditions are satisfied:

- 1) The lowest point of enclosures with a height less than 850mm is located 1000mm below the surface of the water;
- 2) The highest point of enclosures with a height equal to or greater than 850mm is located 150mm below the surface of the water;
- 3) Test duration is 30 minutes;
- 4) The water temperature does not differ from that of the equipment by more than 5K.

3.2 Results

- (x) No water accumulated inside the enclosure.
- (x) The EUT complies with the requirement for protection against water characteristics numerals 7 (IPX7)
(CLAUSE14.2.7)


Pass

4 - EUT PHOTOGRAPHS

4.1 EUT- General view



4.3 EUT- Inside view: no deposit of dust was observable inside the enclosure after IP6X test (sample 1)

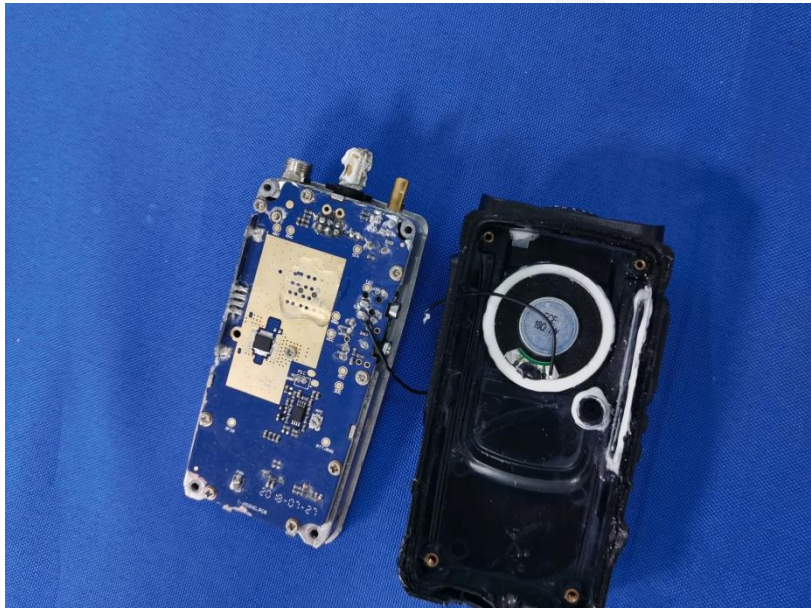

4.4 EUT- Inside view: no water accumulated inside the enclosure after IPX7 test (sample 2)



Directions

1. The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report.
2. This report is based on the report of RXM201029050-SF; all parameters of product are the same, only changed the applicant and product model.
3. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
4. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
5. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.
6. This report cannot be reproduced except in full, without prior written approval of the Company.
7. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

*****End of report*****