



# RT12260S (12V26Ah)

## Specification


Cells Per Unit	6
Voltage Per Unit	12
Nominal Capacity	26Ah@20hour-rate to 1.75V per cell @25°C
Weight	Approx. 8.30 Kg (Tolerance ±5.0%)
Internal Resistance	Approx. 11.5 mΩ
Terminal	F7(M8)/F11(M6)
Max. Discharge Current	260A (5 sec)
Short Circuit Current	850A
Design Life	6~8 years (Float charging)
Max. Charging Current	7.8 A
Reference Capacity	C3 20.1AH C5 22.7AH C10 24.3AH C20 26.0AH
Standby Use Voltage	13.7 V~13.9 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ±5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



RT series is a general purpose battery with 6~8 years design life in float service. It meets with IEC, JIS, BS, GB/T and YD/T standards. With advanced AGM valve regulated technology and high purity raw material, the RT series battery maintains high consistency for better performance and reliable standby service life. It is suitable for UPS/EPS, medical equipment, emergency light and security system applications.



## Dimensions

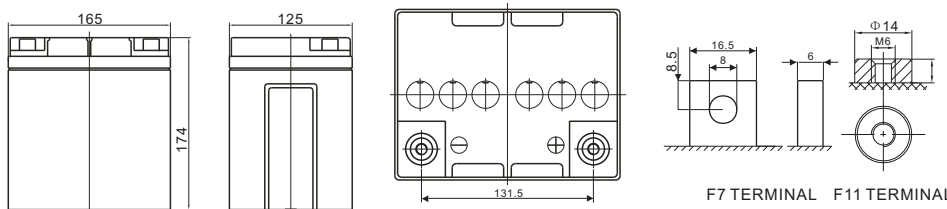

Length	165±1.5mm (6.50 inches)
Width	125±1.5mm (4.92 inches)
Height	174±1.5mm (6.85 inches)
Total Height	174±1.5mm (6.85 inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

Unit: mm

### Constant Current Discharge Characteristics : A (25°C)

F.V./Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	89.03	64.25	46.92	27.22	15.09	9.753	7.332	5.920	4.905	3.157	2.564	1.354
1.65V	82.79	60.71	44.86	26.14	14.57	9.442	7.106	5.759	4.777	3.121	2.532	1.332
1.70V	74.70	55.89	42.01	24.98	14.10	9.131	6.913	5.603	4.653	3.073	2.494	1.316
1.75V	66.92	51.16	39.10	23.88	13.58	8.812	6.706	5.459	4.536	3.031	2.461	1.300
1.80V	58.76	46.31	36.10	22.82	13.06	8.497	6.499	5.302	4.419	2.979	2.430	1.287
1.85V	46.64	37.85	29.96	19.66	11.72	7.785	6.008	4.928	4.121	2.797	2.287	1.222

### Constant Power Discharge Characteristics : WPC (25°C)


F.V./Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	147.6	109.2	82.03	49.45	28.36	18.49	14.00	11.36	9.454	6.165	5.039	2.665
1.65V	138.8	105.2	79.58	47.97	27.54	17.98	13.63	11.10	9.243	6.108	4.985	2.627
1.70V	128.1	98.61	75.65	46.31	26.81	17.49	13.32	10.84	9.034	6.028	4.916	2.598
1.75V	117.3	91.89	71.42	44.72	25.99	16.95	12.97	10.60	8.837	5.956	4.858	2.570
1.80V	105.2	84.63	66.88	43.17	25.14	16.43	12.62	10.33	8.640	5.868	4.802	2.547
1.85V	85.27	70.40	56.29	37.55	22.69	15.13	11.72	9.640	8.084	5.522	4.527	2.422

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values. The battery must be fully charged before the capacity test. The C<sub>20</sub> should reach 95% after the first cycle and 100% after the third cycle.

# RT12260S(12V26Ah)



## Discharge Characteristics Curve

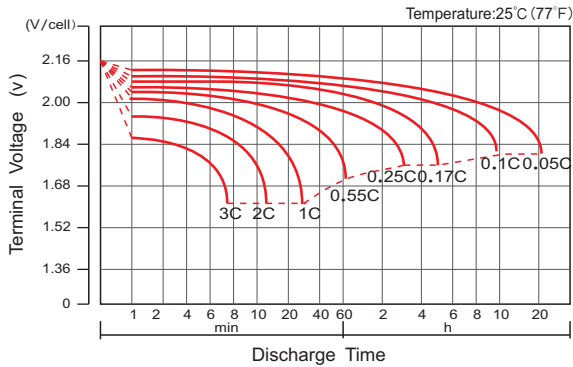

## Charge Characteristic Curve For Standby Use



## Cycle Life In Relation To Depth Of Discharge



## Relationship Between Charging Voltage And Temperature



## Temperature Effects On Capacity



## Storage Characteristics



## Effect Of Temperature On Long Term Life



## Life Characteristics Of Standby Use



(Note) All above information shall be changed without prior notice, Ritar reserves the right to explain and update the latest information.