



The Proven Performer in Laundry



SPEED QUEEN® QUANTUM® TOUCH

Softmount Washer-Extractors

SY65
6.5 kg

SY80
7.5 kg

SY105
10.5 kg

SY135
13.5 kg

SY180
18 kg

SY240
24 kg

SY280
28 kg

Quantum® Touch Control

Reimagine your laundry experience with the Speed Queen Quantum Touch display. Clear, easy to use, easy to understand directions with profitable cycle modifiers enhance your customers' experience and increase return on investment.

- 7", full color, touch screen display
- User-friendly screen with operating instructions built in as part of the control
- 11 basic cycles, 1 custom cycle and temperature selection between 15°C and 90°C.
- Easy-to-understand cycle modifier prompts will encourage your customers to customize their wash
- 30+ languages available

- On screen timer so your customers know exactly how much time their cycle will take
- Speed Cycle option for those who want to get in and out quickly
- Flexible Payment Options - Coin, Card, Mobile, Cash



Unparalleled Performance Without Compromise

- A heavy-duty design meets superior machine mechanics to form the industry's most trusted softmount washer-extractor.
- Laundromats are not "one size fits all". Speed Queen offers options for various location types, such as basements or second floor installations.

Take Control with Speed Queen

- Run your business or laundry room the way you want with Speed Queen® controls.
- Make it advanced with options like Quantum® controls and Speed Queen insights that provide adjustable cost structures, programmable shutdown times, service alerts, business data and more.


Disclaimer: Images shown for illustration purposes only. Actual screens may differ slightly.

SPEED QUEEN® QUANTUM® TOUCH

Softmount Washer-Extractors

A heavy-duty design meets superior machine mechanics to form the industry's most trusted softmount washer-extractor.

- Contemporary aesthetic for a more premium retail experience
- Strong frame lasts longer, balances loads more efficiently, and is designed to reduce sound and vibration levels
- Advanced inverter drive system provides smooth, reliable performance
- High extraction speeds mean shorter dry times and lower energy bills
- Easily serviceable with front panel access

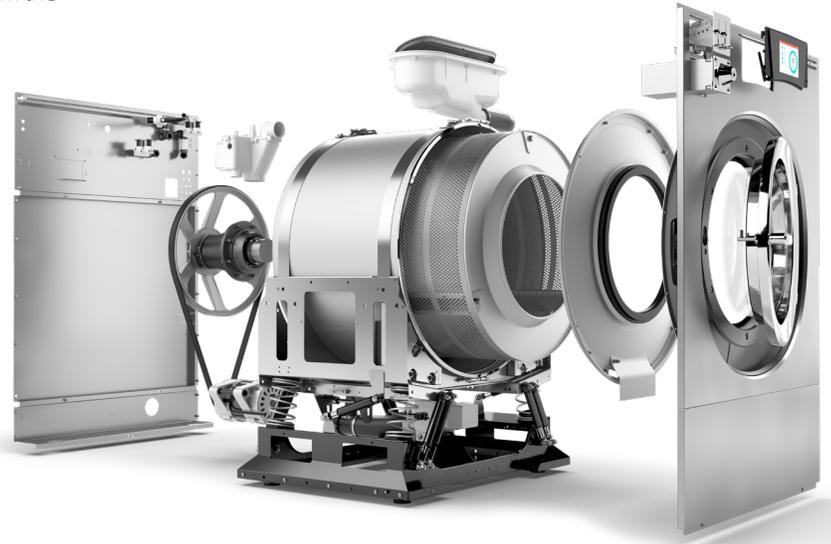

SPEED QUEEN®
INSIGHTS
READY

A profitable Vended Laundry business relies on a combination of factors to grow and stay strong in a competitive market.

Primary factors of - Location - Size of store - Demographics - store layout - functionality and Equipment selection are the foundation of a strong business. But when you want to stand out from the market you need Speed Queen Touch

When you fully set up with the Speed Queen Insights PRO module, you will find a new level of flexibility in with the rest of your business management tools.

You can trust Speed Queens Global Heritage of design and strength, this is now enhanced by the largest cloud based network of Laundromat equipment spread across the Globe. Our USA based 24hr support team has the depth of know how to work with you locally to maximise returns.

You will have the flexibility and control over key aspects of your modern business

- Full visibility of all Washers and Dryers across your stores
- Remote commands - Start - Stop - Clear Vend etc
- Summary view of equipment use and income
- Set up management Alerts and Reports on key metrics
- Market your Cashless APP program directly to users
CRM data collection - Rewards Programs - Bonus Offers
- Adjust programmed cycle via the cloud and much more.

Your confidence will continue to grow with the consistent evolution of this Global Network, all updated automatically.



Disclaimer: Images shown for illustration purposes only. Actual screens may differ slightly.



SPEED QUEEN®
INSIGHTS
READY

Take your business to new levels of efficiency and profitability with advanced analytics and customer data—all integrated into the same platform with the rest of your business management tools. Know how often each customer visits, which machines they use, how they pay, and use that information to increase your revenue through stronger customer relationships and a more rewarding laundry experience.



SPEED QUEEN® QUANTUM® TOUCH




	SY65	SY80	SY105	SY135
Control Option	Quantum Touch	Quantum Touch	Quantum Touch	Quantum Touch
Capacity - lb (kg)	14 (6.5)	20 (7.5)	25 (10.5)	30 (13.5)
Dimensions (H x W x D) - mm	1135 x 710 x 730	1135 x 710 x 780	1245 x 795 x 785	1245 x 795 x 935
Cylinder Diameter x Depth - mm	530 x 305	530 x 350	620 x 350	620 x 450
Cylinder Volume - liters	65	75	105	135
Door Opening Size - mm	330	330	410	410
Door Bottom to Floor - mm	349 + 200 Base	349 + 200 Base	342 + 200 Base	342 + 200 Base
Heating - Electricity (standard) -kW	3/4.6/6/9	3/4.6/6/9	3/4.6/6/9/12	3/4.6/6/9/12/13.8
Maximum Hot water Inlet (°C)	90	90	90	90
Sound pressure level - dB(A)	<65	<65	<65	<65
Water valves connection (BSP)	3/4"	3/4"	3/4"	3/4"
Water pressure (kPa)	100-800	100-800	100-800	100-800
Rec. water pressure (kPa)	300-500	300-500	300-500	300-500
Water Inlet Connection - I/mm	20	20	20	20
Drain Diameter - mm	3 (76)	3 (76)	3 (76)	3 (76)
Drain Height to Floor - in (mm)	3.46 (88)	3.46 (88)	3.46 (88)	3.46 (88)
Motor Power Consumption - HP (kW)	1 (0.75)	1 (0.75)	1.48 (1.1)	2.01 (1.5)
Wash speed - RPM	49	49	49	49
Extraction - RPM	1165	1165	1075	1075
G-factor	400	400	400	400
Shipping Dimensions Approx.- H x W x D (mm)	1265 x 750 x 840	1265 x 750 840	1365 x 835 x 840	1365 x 835 x985
Net Weight - lb (kg)	375 (170)	408 (185)	463 (210)	563 (255)
Shipping Weight - lb (kg)	397 (180)	441 (200)	518 (235)	606 (275)

	SY180	SY240	SY280
Control Option	Quantum Touch	Quantum Touch	Quantum Touch
Capacity - lb (kg)	40 (18)	55 (24)	70 (28)
Unit Dimension H x W x D - mm (no base)	1430 x 970 x 960	1430 x 970 x 1095	1430 x 970 x 1175
Cylinder Diameter x Depth - mm	750 x 410	750 x 545	750 x 620
Cylinder Volume - cu. ft (liters)	6.4 (180)	8.5 (240)	9.9 (280)
Door Opening Size - mm	460	460	460
Door Bottom to Floor - (mm) add 200mm for base	477	477	477
Heating - Electricity (standard) -kW	12/18	18	21.9
Hot water (°C)	90	90	90
Sound pressure level - dB(A)	<65	<65	<65
Water valves connection (BSP)	3/4"	3/4"	3/4"
Water pressure (kPa)	100-800	100-800	100-800
Rec. water pressure (kPa)	300-500	300-500	300-500
Water Inlet Connection - I/mm	20	20	20
Drain Diameter - mm	76	76	76
Drain Height to Floor - mm plus 200mm for base	108.5	108.5	108.5
Motor Power Consumption - HP (kW)	2.95 (2.20)	4.02 (3.0)	4.02 (3.0)
Wash speed - RPM	42	42	42
Extraction - RPM	980	980	915
G-factor	400	400	350
Net Weight - / Shipping Weight - kg	380 / 395	430 / 450	495 / 515
Shipping Dimensions H x W x D Approx.- mm	1570 x 1025 x 1015	1570 x 1025 x 1150	1570 x 1025 x 1225
Heating - Steam (bar) / (Valve BSP) / Pressure (kPa)	1-8 / (1/2") / 100-800	1-8 / (1/2") / 100-800	1-8 / (1/2") / 100-800

Softmount Washer-Extractors

Measurements: (mm)	SY65	SY80	SY105	SY135	SY180	SY240	SY280
A	710	710	795	795	970	970	970
B	24	24	24	24	24	24	24
C	349	349	342	342	477	477	477
D	1135	1135	1245	1245	1430	1430	1430
E	582	582	617	617	777	777	777
F	240	240	240	240	335	335	335
G	730	780	785	935	960	1095	1175
H	642	692	692	842	872	1007	1087
I	48	48	48	48	48	48	48
J	180	180	180	180	90	90	90
K	940	940	1050	1050	1234	1234	1234
L	480	480	506	506	490	490	490
M	88	88	88	88	108.5	108.5	108.5
N	230	230	230	230	270	270	270
O	203	203	203	203	203	203	203
P	N/A	N/A	N/A	N/A	N/A	N/A	10.79 (274)
Q	67	67	67	67	67	67	67
R	1030	1030	1140	1140	1324	1324	1324
S	42	42	42	42	80	80	80
T	283	283	293	293	293	293	293
U	390	390	475	475	610	610	610
V	218	218	218	218	218	218	218
W	113	113	113	113	113	113	113

1. Control panel
2. Soap dispenser
3. Centralstop button
4. Steam connection
5. Air relieve
6. Liquid soap connection
7. Recycled water inlet
8. Recycled water valve cable inlet
9. Cold water inlet, soft
10. Cold water inlet, hard
11. Electrical connection
12. Hot water inlet
13. Main switch/Field wiring terminal (NA models)
14. Heating change-over switch
15. Liquid soap pump electrical connection
16. Fuses
17. USB port - optional
18. PC programming connection
19. Discharge water cable inlet
20. Drain valve - 3 in. [76 mm]
21. Drain Valve - 1/2", applicable for wash bath sample (on request only)
22. Drain valve or recycle valve - 3 in. [76 mm] 280 L Models only)
23. Hidden USB port (under top cover) - standard

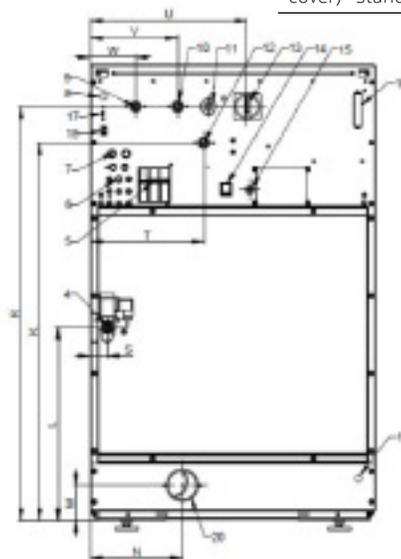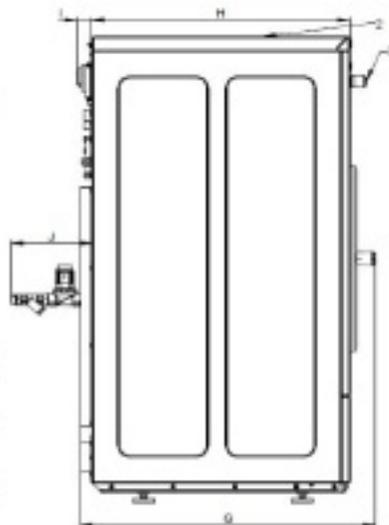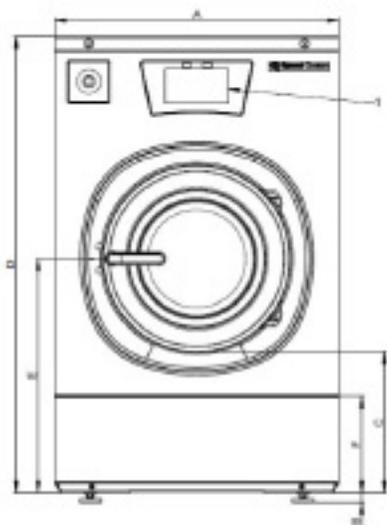

CONTACT YOUR LOCAL CONSULTANT @
 E: sales@speedqueensales.com.au
 P: 03 9495 1300
 www.speedqueensales.com.au

Contact Speed Queen Equipment Sales for further details:

