



UPster PF 600

The best choice for people, the environment
and your bottom line.



UPster PF 600

Economical, resource-efficient and user-friendly




The *UPster PF 600* is built to tackle the toughest jobs in the wash-up area. It uses an innovative, oscillating wash system combined with a highly effective rotating arm rinse system and incorporates MEIKO's innovative electronic control system with its built-in infrared interface.

Behind the large door there's plenty of space for pots, pans, bowls, trays, kitchen utensils, transport containers and much, much more. It also comes with all the standard equipment and features you would expect from a premium class model.

- **Fully electronic control system with integrated infrared technology**
- **3 wash programmes (digital temperature indication for wash and rinse temperatures)**
- **Entry height 600 mm**
- **Comfortable operation due to intelligent electronics with easy to understand display symbols on sensor panel**
- **Wash tank completely covered with easily removable tank sieve**
- **Main basket completely made of stainless steel with rollers for easy loading**
- **Maintenance-friendly access to all aggregates**
- **Available for wall and floor connection**
- **Machine inclusive connection kit**



Technical data		UPster PF 600 400 V
Tank heating	kW	6.0
Boiler heating	kW	10.5
Pump capacity	kW	2
Total connected load	kW	12.5
Water consumption	l/basket	4.0
Tank capacity	l	60
Entry height	mm	600
Basket dimension	mm	670 x 630
Programme cycle*	sec	120/240/360
Theoretical basket capacity	baskets/h	30/15/10

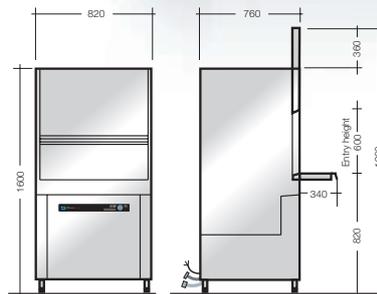

* If the machine is connected to a cold water supply and/or if baskets are inserted in quick succession, the duration of the wash cycles may be increased to achieve hygienic final rinse temperatures.



Complies with the hygiene requirements of DIN SPEC 10534.

121.090.00.06.16/Int/PDF

We reserve the right to amend specifications as part of our product improvement process.