

4"(Ø164 mm) Technical information

Tank unit / Adapter and Hose unit / Coupler



According to NATO STANAG 3756

Material	Maximum working pressure	Test pressure	Minimum Burs Pressure
Aluminium	10 bar / 145 psi	15 bar / 218 psi	50 bar / 726 psi
Brass/Gun Metal	16 bar / 232 psi	24 bar / 348 psi	80 bar / 1160 psi
Stainless Steel	25 bar / 363 psi	37,5 bar / 544 psi	125 bar / 1813 psi

Connections

4" in BSP, NPT and Flanged inlet

Applications

The 4" (Ø164 mm) is recommended loading/unloading of rail tanker, aviation refueller, road tanker etc. Also recommended for ship to shore transfer, ship to ship transfer and ship to rig transfer or on any application where spillage needs to be minimized.

Media

Petroleum products: Gasoline, diesel, oil etc.

Chemical products: Ethylene Oxide, Propylene Oxide, Acrylonitrile, Butadiene, Ammonia, Vinyl Chloride, Toluene, Xylene, Sulphuric Acid, Phenol etc.

Gas:

Dry powder: Chocolate powder e.t.c.

Material

Aluminium, Brass/Gunmetal, Stainless Steel, Hastelloy and PEEK. Other materials on request.

Seals

Standard seals in FPM (Viton®), EPDM, Chemraz®, Kalrez®, NBR (Nitrile). Other materials on request.

High Flow Rates / Low Pressure Drop

Allows maximum product transfer with minimal losses

Recommended Maximum Flow Rates

3500 litres/minute (fuel)

Selectivity

- Avoid mixing products:

To avoid product contamination caused by connecting a hose unit to the wrong tank unit, selective versions of the hose and tank units are available. Each unit has a number of selective positions, designated by a coded part number according to the coupling size - specify when placing order.

Interchangeability:

Compatibility with other existing brands, e.g. TODO-matic and Fulcrum couplings.

Hose unit with Integrated Swivel

All hose units are designed with integrated Swivel

4" (Ø164 mm) Tank unit / Adapter - Female thread

According to NATO STANAG 3756

Connection ¹⁾ Inch/DN	Material ²⁾	Seal ³⁾		Weight		Code No
		O-ring	Flat seal	kg	lbs	
F 4" BSP	AI	Standard: FPM/FKM (Viton®)	PUR (Vulkollan®)	2,5		T516A1101B
F 4" NPT				2,8		T517A1101
F 4" BSP	GM	Other on request	PUR (Vulkollan®)	7,0		T516D2201B
F 4" NPT				7,7		T517D2201
F 4" BSP	SS		PTFE (Teflon®)	6,0		T516B4401A
F 4" NPT				6,4		T517B4401




- 1) Female thread BSP=ISO 228, NPT=ANSI B1.20.1
2) **Mtrl:** AI=Aluminium, GM=Gun Metal, SS=Stainless Steel
3) Standard seal. Other on request.

Viton® (FPM) and Teflon® (FPM/KPM) are registered trademarks of DuPont, DuPont Elastomers. Vulkollan® is registered trademark of Bayer AG

4" (Ø164 mm) Tank unit / Adapter, Flanged inlet

According to NATO STANAG 3756

Flange ¹⁾	Body Material ²⁾	Seal ³⁾	Weight		Code No	
		O-ring	kg	lbs		
undrilled Ø230 mm	AI	Standard: FPM/FKM (Viton®)	3,2		T521D1101	
DN 100 PN 10 / 16 Type B			3,1		T539D1101	
4" ANSI 150 psi			3,2		T563D1101	
TW3 (DN 100)			2,6		T566D1101	
4" TTMA			2,6		T568D1101	
undrilled Ø230 mm	GM				T521D2201	
DN 100 PN 10 / 16 Type B					T539D2201	
DN 100 PN 25 / 40 Type B					T540D2201	
4" ANSI 150 psi					T563D2201	
4" ANSI 300 psi					T564D2201	
TW3 (DN 100)				T566D2201		
4" TTMA				T568D2201		
undrilled Ø230 mm	SS		Other on request			T521B4401
undrilled Ø230 mm **)						T521B4401F
DN 100 PN 10 / 16 Type B		8,7			T539B4401	
DN 100 PN 10 / 16 Type B **)					T539B4401F	
DN 100 PN 25 / 40 Type B					T540B4401	
DN 100 PN 25 / 40 Type B **)					T540B4401F	
DN 100 PN 25 / 40 Type E					T538B4401F	
4" ANSI 150 psi					T563B4401	
4" ANSI 150 psi**)		8,9			T563B4401F	
4" ANSI 300 psi					T564B4401	
4" ANSI 300 psi **)		12			T564B4401F	
TW3 (DN 100)					T566B4401	
4" TTMA			T568B4401			

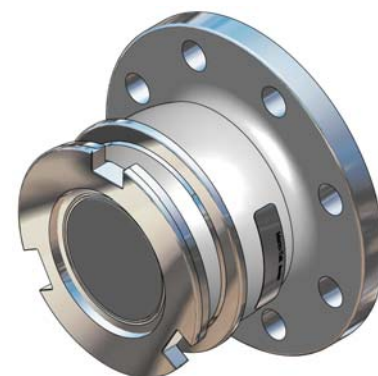

- 1) Flanges according to EN 1092, ANSI B16.5 and DIN 28459.
2) **Mtrl:** AI=Aluminium, GM=Gun Metal, SS=Stainless Steel
3) Standard seal. Other on request.

*) Type E, EN 1092-1:2001 Spigot
**) Flange with standard thickness

Viton® (FPM) and Teflon® (FPM/KPM) are registered trademarks of DuPont, DuPont Elastomers. Vulkollan® is registered trademark of Bayer AG

4" (Ø164 mm) Hose unit / Coupler - Female thread

According to NATO STANAG 3756

Connection ¹⁾ Inch/DN	Body Material ²⁾	Seal ³⁾		Weight		Code No
		O-ring	Flat seal	kg	lbs	
F 4 BSP	AI	Standard:	PUR	7,6		S516B1101B
F 4" ASSPT			(Vulkollan®)			S5136B1101B
F 4" NPT				7,9		S517B1101
F 4" BSP	GM	FPM/FKM (Viton®)	PUR	17,5		S516B2201B
F 4" ASSPT			(Vulkollan®)			S5136B2201B
F 4" NPT				17,7		S517B2201
F 4" BSP	SS	Other on request	PTFE	15,6		S516B4401A
F 4" ASSPT			(Teflon®)			S5136B4401A
F 4" NPT				15,9		S517B4401



1) Female thread BSP=ISO 228, NPT=ANSI B1.20.3

2) **Mtrl:** AI=Aluminium, GM=Gun Metal, SS=Stainless Steel

3) Standard seal. Other on request.

4" (Ø164 mm) Hose unit / Coupler, Flanged inlet

According to NATO STANAG 3756

Flange ¹⁾	Body Material ²⁾	Seal ³⁾	Weight		Code No
		O-ring	kg	lbs	
undrilled Ø230 mm	AI	Standard: FPM/FKM (Viton®)			S521B1101
DN 100 PN 10 / 16 Type B			9,3		S539B1101
4" ANSI 150 psi			9,4		S563B1101
4" TTMA			8,7		S568B1101
TW3 (DN 100)			8,7		S566B1101
undrilled Ø230 mm	GM				S521B2201
DN 100 PN 10 / 16 Type B					S539B2201
DN 100 PN 25 / 40 Type B			23,9		S540B2201
4" ANSI 150 psi					S563B2201
4" ANSI 300 psi					S564B2201
4" TTMA					S568B2201
TW3 (DN 100)					S566B2201
undrilled Ø230 mm	SS	Other on request			S521B4401
undrilled Ø230 mm **)					S521B4401F
DN 100 PN 10 / 16 Type B			16,1		S539B4401
DN 100 PN 10 / 16 Type B **)					S539B4401F
DN 100 PN 25 / 40 Type B			16,1		S540B4401
DN 100 PN 25 / 40 Type B **)					S540B4401F
DN 100 PN 25 / 40 Type E					S538B4401F
4" ANSI 150 psi			21,0		S563B4401
4" ANSI 150 psi**)					S563B4401
4" ANSI 300 psi					S564B4401
4" ANSI 300 psi **)					S564B4401F
4" TTMA					S568B4401
TW3 (DN 100)					S566B4401



*) Type E, EN 1092-1:2001 Spigot

**) Flange with standard thickness

1) Flanges according to EN 1092, ANSI B16.5 and DIN 28459

2) **Mtrl:** AI=Aluminium, GM=Gun Metal, SS=Stainless Steel

3) Standard seal. Other on request.

Viton® (FPM) and Teflon® (FPM/KPM) are registered trademarks of DuPont, DuPont Elastomers. Vulkollan® is registered trademark of Bayer AG