
Product Data





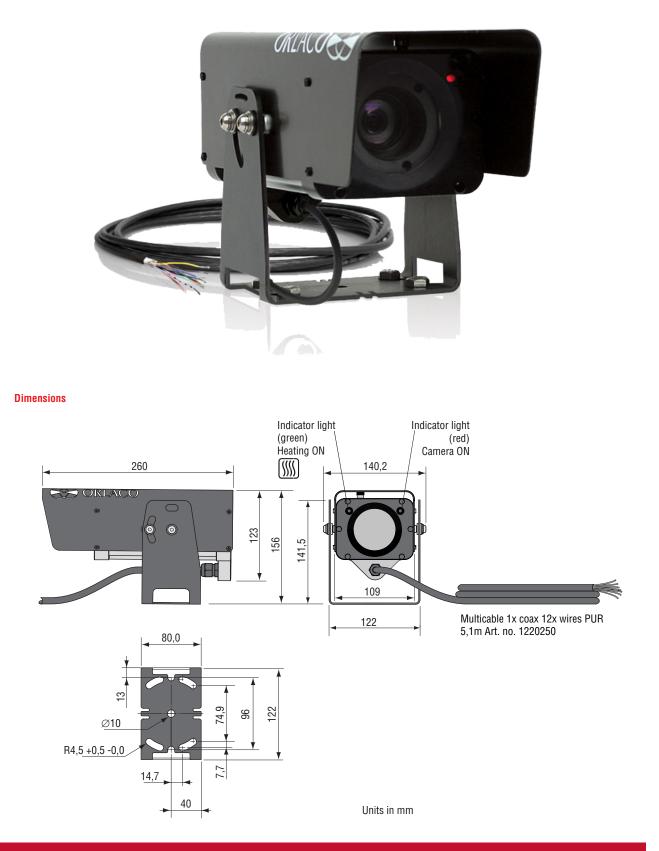

TECHNICAL DATA

Camera AFZ PAL HW

	Description						
Article number	Description 0103513						
	0100010						
	Sensor						
Image sensor	1/3" CMOS sensor.						
Hor. Resolution	>700 TV lines (PAL/NTSC).						
Lens	30x optical, $32x$ digital zoom. f = 5.1 mm to 51 mm, F1.6 (WIDE) to F1.8 (TELE).						
20110	High zoom ratio up to 53x when used in PAL/NTSC mode (1.9x digital zoom will not influence image quality. Sensor itself is \pm						
	4x the number of pixels needed to create PAL/NTSC output).						
Angle of view (H)	58.9° (wide) 2,11° (tele).						
Minimum illumination	0.5 lux (1/30sec).						
0-Lux mode	0.025 lux (1/7.5sec).						
• ====							
	Electrical						
Power input	Cable between camera and power supply < 50 m 12-24V/DC, > 50 m 18-24V/DC.						
Power consumption	Temperature <0°C (Heating on): 7,2 W & >0°C (Heating off): 3,6 W.						
Communication	Hard wired input.						
Cable	Hard wired, 5,1m Multicable 1x coax 12x wired; Art. no. 1220250.						
Construction	Mechanical Steinlass steel OC204, mounting parts and our source apadiesd aluminium bousing, suitable for mobile applications with						
Construction	Stainless steel QS304, mounting parts and sun cover, anodised aluminium housing, suitable for mobile applications with						
	shocks and vibrations. Corrosion proof housing according to IEC 60068-2-52 salt mist, cyclic. Dry-nitrogen filled, 1.4 Bar						
Ingroop protoction	OVERPRESSURE.						
Ingress protection	IP68 according to IEC 60529, Dust tight and protected against the effects of immersion in water up to 10m under water for 30 minutes and IP69K according to DIN 40050-9, camera can withstand a high pressure cleaning with water: 14-16L/min 80°C						
	and 100 Bars flow.						
Bracket	Standard Alu bracket, including bolts, nuts and washers. Suitable for mounting overhead and standing.						
Operating temperature	-40°C to +85°C.						
Glass	-40 C to +65 C. Chemically hardened lens glass, 7x stronger than ordinary glass, scratchproof surface, following "VII Flachgläser"(German std.).						
Weight	2,6 kg.						
	2,0 Kg.						
	Certification						
Green Passport	All materials are compliant to Green Passport requirements according IMO resolution MEPC.197(62) as adopted on 15 July						
	2011 (Maritime sector: International Maritime Organization concerning the functions of the Marine Environment Protection						
	Committee).						
Installation	See Installation Manual; IM0973112.						
	Electrical connections						
	Multicable 1x coax 12x wired; Art. no. 1220250						
	14 White/black; not connected						
	13 Green Brightness on/off						
	12 Purple Autofocus on/off						
	10 Red/Black Zoom in slow						
	9 Blue Zoon out slow						
	8 Grey Zoom in fast						
	<u>a</u> 7 Brown <u>Zoom out fast</u>						

	JDIUC		\sim			
	8 Grey		~	Zoom in fast	I	
	7 Brown		~	Zoom out fast	I	
cable	6 Yellow		~	Focus	I	
ca	5 Pink		~	_ Focus	Ι	
	4 Black	0	~	0V /		c
1220250 5 m Multi	3 Red		~	Power input		2
2 E	2 Coax shielding	0	~	Video GND	- 0+	24V
- 2	1 Coax core	0	0	Video signal	0	5
			0-			-

All data subject to change without notice. All dimensions are for commercial purpose only.

The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable. All products are manufactured in accordance with the ISO 9001 quality management system, IATF 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.





www.orlaco.com