




Product Data




Dimensions

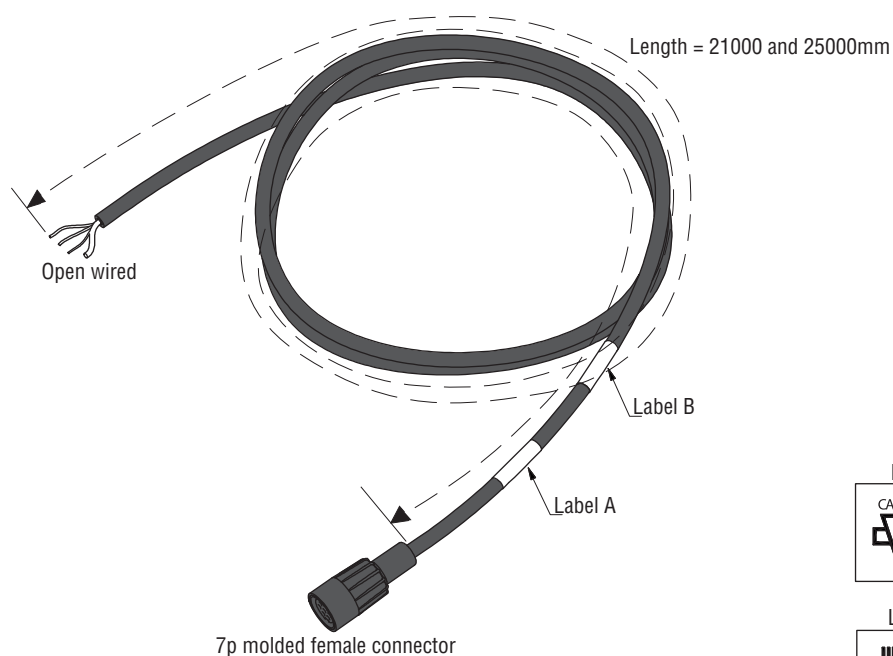

TECHNICAL DATA

Cable *m ow m7F

	Description	
Article number	0302130	0302160
Description	Cable 25m ow m7F	Cable 21m ow m7F
Length	25m	21m
Cable	Art. no. 1220170 Multicable with 7p molded female connector.	
Coax	Tinned copper AWG 26 = 1 x 0,14mm ² 18 x 0,1. Shield Spiral braided coverage ≥ 85% 0,4mm.	
C1,C2,C3 Conductor	3 x AWG26, 7 x 0,16mm, tinned copper. Color: Orange Yellow, Grey.	
A1,A2 Conductor	2 x AWG22, 7 x 0,25mm, tinned copper. Color: Black, Red.	
Jacket	TPU, 6,0mm +0,0/-0,2mm, Color: Black RAL 9005.	
Shield	Braided tinned copper, coverage > 85%.	
Temperature range	-40°...+85°C (static).	
Impedance coax	75Ω	
Min. bending radius	7,5 x D static.	
Approval	Fire resist IEC60332-2, Halogen free DIN VDE 0472 part 815.	



Electrical connection	
Molded 7p female connector	
1 = Core Coax	Video
2 = Screen Coax	Video GND
3 = Red	Power
4 = Black	0V
5 = Orange	Aux 1
6 = Yellow	Aux 2
7 = Grey	Aux 3

All data subject to change without notice. All dimensions are for commercial purpose only.
The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.
All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

