

Vision is
our mission®

Product Data

Cable 1m Ethernet M12M-4p
Article no. 0321300

Cable 2m Ethernet M12M-4p
Article no. 0321310

Cable 3m Ethernet M12M-4p
Article no. 0321320

Cable 5m Ethernet M12M-4p
Article no. 0321330

Cable 7,5m Ethernet M12M-4p
Article no. 0321340

Cable 8m Ethernet M12M-4p
Article no. 0321350

Cable 9m Ethernet M12M-4p
Article no. 0321360

Cable 11m Ethernet M12M-4p
Article no. 0321370

Cable 16m Ethernet M12M-4p
Article no. 0321380


Cable 21m Ethernet M12M-4p
Article no. 0321390

Cable 40m Ethernet M12M-4p
Article no. 0321400

2018 • DS0960133 EN A 01



Dimensions

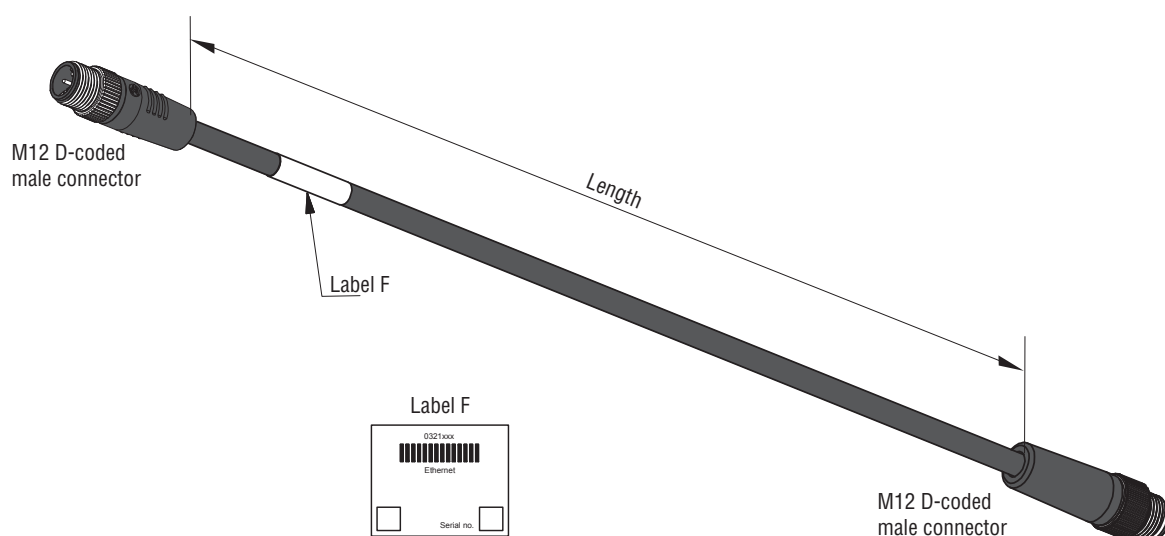

TECHNICAL DATA


Cable *m Ethernet M12M-4p

	Description										
Article number	0321300	0321310	0321320	03210330	0321340	0321350	0321360	0321370	0321380	0321390	0321400
Length	1m	2 m	3m	5m	7,5m	8m	9m	11m	16m	21m	40m
Weight	0,12kg.	0,19kg.	0,27kg.	0,4kg.	0,59kg.	0,62kg.	0,67kg.	0,83kg.	1,1kg.	1,4kg.	2,9kg.
Connectors	Molded M12 D-coded										
Cable	Art. no. 1220220; Cable Ethernet 2TP + Power (CAT5e).										
Temperature range	-40°...+85°C.										
Min bending radius	7.5 x diameter or smaller.										
Coax Nominal impedance	100Ω										
Approvals	Flame: IEC 60332-2.										

Electrical connection

Note: All Ethernet UNI cables are also suitable for the Orlaco BroadR-Reach cameras. The M12 connector pinning for both interfaces is shown.

Color	Ethernet	BroadR-Reach
1 = Orange/white	= +Tx	BR-
2 = Green/white	= +Rx	0V
3 = Orange	= -Tx	BR+
4 = Green	= -Rx	0V
Overall shielding connected to connector housing.		



Front side Male
M12 Connector D-Coded

All data subject to change without notice. All dimensions are for commercial purpose only.
The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.
All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

