

DMF - Z - 20 J

Plateau Electronically Controlled Pulse Valve

Z: Right Angle
Y: Submerged

Connection Thread
20: 3/4
25: 1
40: 1-1/2
50: 2
62: 2-1/2
76: 3

J: Economical
S: Double Diaphragm

Standard Voltage
DC24V
AC220V

规格型号/Specifications



DMF-Z-20J (经济型)



DMF-Z-25J (经济型)



AMF-Z-20
SCG353A043



AMF-Z-25
SCG353A044



AMF-Z-40S
SCG353A047



AMF-Z-50S
SCG353A050




AMF-Z-62S
SCG353A051

产品参数/Product parameters

产品型号/Model	DMF-Z-20J (经济型)	DMF-Z-25J (经济型)	AMF-Z-20 SCG353A043	AMF-Z-25 SCG353A044	AMF-Z-40S SCG353A047	AMF-Z-50S SCG353A050	AMF-Z-62S SCG353A051
工作压力/Work pressure	0.3-0.8Mpa						
环境温度/Environment temperature	-15-65℃						
相对湿度/Relative humidity	<85%						
使用介质/Use medium	干燥清洁的压缩空气/Dry clean compressed air						
电压/Electric pressure	AC110V/AC220V/DC24V						
膜片寿命/Diaphragm life	喷吹100万次以上/Injection of 1 million or more						
公称通径/Nominal diameter	Φ20	Φ25	Φ20	Φ25	Φ40	Φ50	Φ62
连接螺纹/Connection thread	G3/4"	G1"	G3/4"	G1"	G1-1/2"	G2"	G2-1/2"
流量系数Kv/Cv/The discharge coefficient	17.55/20.48	26.16/30.53	17.55/20.48	26.16/30.53	45.82/53.47	62.09/72.46	136.58/159.39
喷吹面积(m ²)/The injection area	3.5-6	8-10	3.5-6	8-10	12-16	18-28	27-38

外形尺寸/Overall Dimension

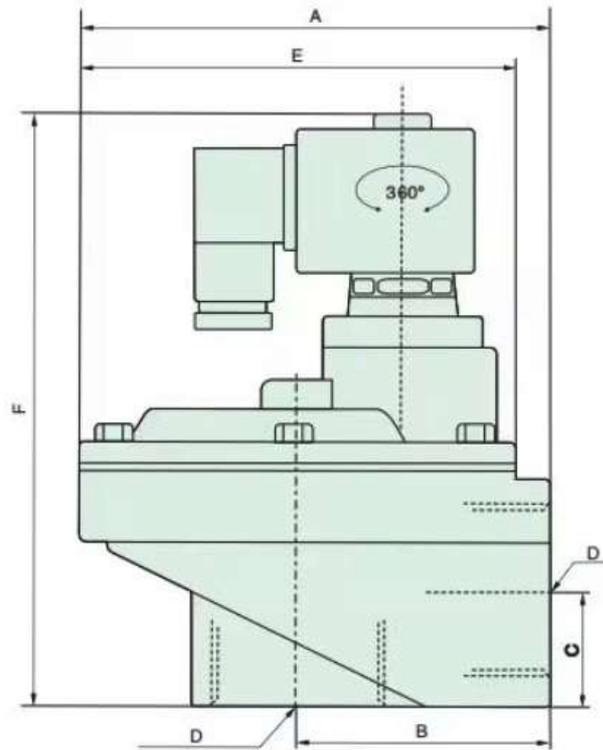

尺寸表/Dimension Sheet

符号/Symbol 规格/Specifications	A	B	C	D	E	F
20J	89	51	21	G3/4"	75	123
25J	89	51	21	G1"	75	123
20	89	51	21	G3/4"	75	110
25	89	51	21	G1"	75	110
40	132	71	30	G1-1/2"	136	163
50	168	95	45	G2"	165	206
62	168	95	45	G2-1/2"	165	206