




Graphic Symbol



## ORDERING

QSL ↑ Model	08 ↑ Port size
Filter	08:G1/4
	10:G3/8
	15:G1/2
	20:G3/4
	25:G1
	35:G1-1/4
	40:G1-1/2
	50:G2

Remark:  
Pls feel free to contact with us if you have any customized request


## FEATURES

1. High polymer water cup, with good permeability, high strength characteristics, anti-impact, high pressure.
2. Unique cyclone vortex design, the use of airflow to generate high-speed rotation, the larger water molecules and dust particles thrown out of the detachment.
3. Large flow, low air resistance, filtering air oil and water, impurities, dust particles, improve compressed air quality. Proof pressure with 10bar/16bar optional.
4. Protect your automation equipment for longer lifespan.

## DATA SHEET

Type-name	Air Filter							
Model	QSL-08	QSL-10	QSL-15	QSL-20	QSL-25	QSL-35	QSL-40	QSL-50
Port Size (G)	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
Working pressure	0~1.0Mpa							
Working Medium	Air							
Operating Temperature Range	5-60℃							
Water Cup Capacity(ml)	400	400	400	700	700	700	700	700
Grade of Filtration	20~70um							
Material	Aluminium alloy+PC							
Weight	700g	700g	700g	1400g	1400g	1700g	1700g	1700g

## STRUCTURE&DIEMENSION(MM)

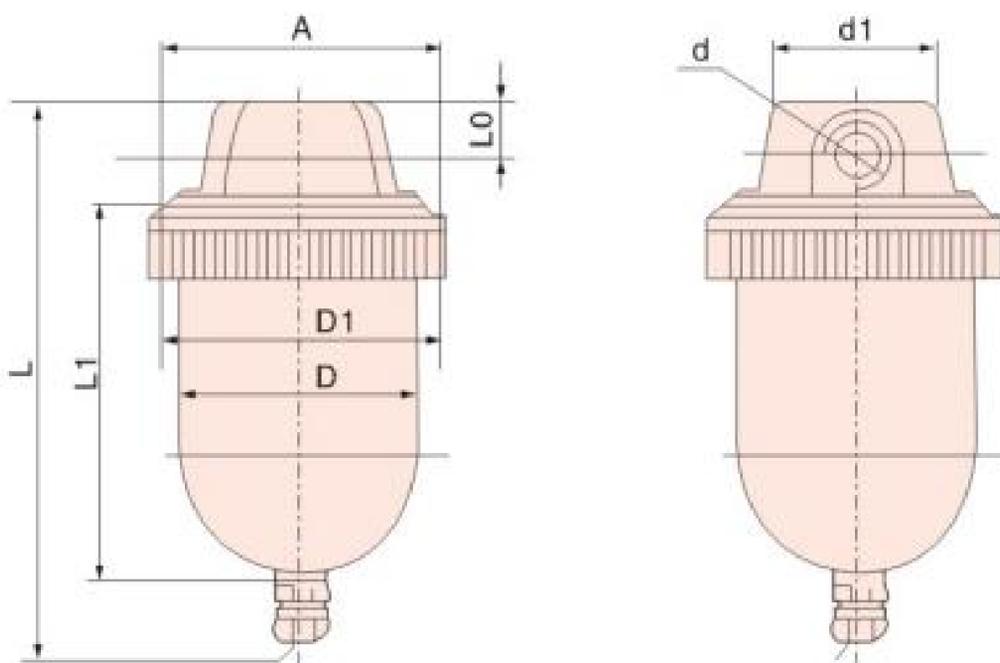

Model	Port size	A	D	D1	L0	L1	L
QSL-08	1/4	90	70	88	15	114	160
QSL-10	3/8	90	70	88	15	114	160
QSL-15	1/2	90	70	88	15	114	160
QSL-20	3/4	115	90	110	23	151	234
QSL-25	1	115	90	110	23	151	234
QSL-35	1-1/4	130	90	130	34	228	305
QSL-40	1-1/2	130	90	130	34	228	305
QSL-50	2	130	90	130	34	228	305