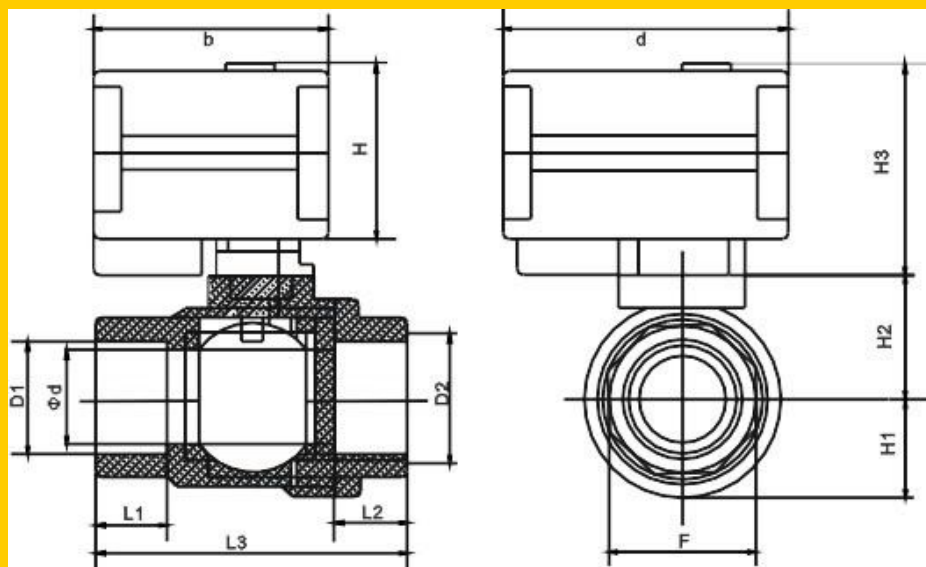


CWX-15 SERIES 2-WAY MOTORIZED VALVE (BRASS)

TECHNICAL PARAMETERS														
Series	Max torque	Operating time	Working voltage	Max power	Enclosure	Max pressure	Medium temperature	Ambient temperature						
CWX-15	2N.m	3-5S	DC5V	<2W	IP65	1 Mpa	0-100℃	-20℃<t<45℃						
			AC/DC9-24V											
			AC85-265V											
			FEATURES				APPLICATION							
			Mini dimension suit for small equipment				HVAC							
			Patented technology-floating seal structure				Water treatment							
			Long service life: 80000-100000 circles				Chemical process							
			Low working current, suitable for battery driving				Small equipment for automatic Control							
			Quickly open and position indicator				Replacing solenoid valve, particularly when solenoid can't work reliably							
			Metal gearbox and POM gear											
			High flow capability											
			PARTS		MATERIAL									
			Actuator housing		ABS									
			Valve body		Brass									
			Valve ball		Brass									
			Stem		Brass									
			Ball seat		PTFE									
			Seal		EPDM									
Valve size(mm)		Size	D1/D2	Φd	L1	L2	L3	F	H1	H2	H3	b	d	W(kg)
NPT, BSP Both Female screw Full Port		DN15	G1/2"	15	11	11	54	27	16	22	50	52	62	0.342
		DN20	G3/4"	20	10	10	61	30	22	22	50	52	62	0.330
		DN25	G1"	25	16	18	72	38	26	26	50	52	62	0.499
Control model & Wiring diagram														
CR01(2 wires)		CR02(3wires)			CR03(3wires)			CR04(2wiers)			CR05(5wires)			
Standard control		Two point control			One point control			Auto-return			Signal feedback			