

Maker Electric



Air Compressor Pressure Switch
MK-ACPS01

Maker Electric



Air Compressor Pressure Switch
MK-ACPS02

Maker Electric



Air Compressor Pressure Switch
MK-ACPS03

Maker Electric



Air Compressor Pressure Switch
MK-ACPS04

Maker Electric



Air Compressor Pressure Switch
MK-ACPS05

Maker Electric



Air Compressor Pressure Switch
MK-ACPS06

Maker Electric



Air Compressor Pressure Switch
MK-ACPS07

Maker Electric



Air Compressor Pressure Switch MK-ACPS08

Maker Electric



Air Compressor Pressure Switch MK-ACPS09



Модели:

GYD20-16

Макс. напряжение:

380 В

Макс. ток:

16A

style	Rated Current A	Rated voltage(V)	(MPa)	Rated Current(A)	Pressure difference(Mpa)	Inlet joints screw	Exhaust joints screw
GYD20-16/A	16	380	0.7	0.3~0.7	0.3±0.05	G3/8"	M10×1
GYD20-16/B	16	380	1.0	0.4~1.0	0.3±0.05	G3/8"	M10×1
GYD20-16/C	16	380	1.5	0.6~1.5	0.3±0.05	G3/8"	M10×1
GYD5-6.3/A	6.3	380	0.7	0.3~0.7	0.2~0.3	G3/8"	M10×1
GYD5/6.3/B	6.3	380	1.0	0.4~1.0	0.25±0.35	G3/8"	M10×1
GYD20-16	16	380	1.0	0.4~1.0	0.3±0.05	M10×1	M10×1

Часть №.	Номинальное напряжение	Номинальный ток	Номинальное рабочее давление	Разница в давлении МПа	Диаметр совместного протектора	Диаметр впускного отверстия
GYD20-16A	380В	16А	0.7мпа	0,3 ± 0,05	G3/8"	M10 * 1
GYD20-16B	380В	16А	1.0Мпа			
GYD20-16C	380В	16А	1,25 МПа 1,5 МПа			
GYD20-2	380В	20А	1.0Мпа			
GYD20-20B	380В	20А	1.0Мпа			
GYD20-20C	380В	20А	1,5 МПа			

МК-ACPS01



Обратите внимание, что товар будет
отправлен 220 В, 1 порт случайного давления.

Переключатель давления воздушного компрессора

Модель: МК-ACPS01

Используется для воздушного компрессора

Качество: стандарт

1/4 "мужской или женский NPT

АИК компрессор реле давления МК-ACPS01 Технические данные

Модель	Средний	Мин вкл (Обрезной) (PSI)	Макс ВЫКЛ (Вырез) (PSI)	Дифференциал (PSI)	Завод Настройка (PSI)	Электрическая оценка		Подключение	Контактное устройство
						120 В переменного тока	240В переменного тока		
МК-ACPS01-1H1	Воздух	25	100	20-30	50-80	20A	12A	1/4 "Папа/ Женский NPT (1 порт)	NC
МК-ACPS01-1H2		35	150	30-40	85-115	20A	12A		
МК-ACPS01-1H3		50	175	35-55	110-150	20A	12A		
МК-ACPS01-4H1	Воздух	25	100	20-30	50-80	20A	12A	1/4 "Женский NPT (4 порта)	NC
МК-ACPS01-4H2		35	150	30-40	85-115	20A	12A		
МК-ACPS01-4H3		50	175	35-55	110-150	20A	12A		

Переключатель давления воздушного компрессора МК-ACPS01 используются для регулирования давления резервуара между двумя предустановленными значениями на небольших (до 175psi) воздушных компрессоров с электрическим приводом. Они доступны с разгрузочным клапаном, который предотвращает Запуск компрессоров под нагрузкой, и рычагом автоматического отключения для ручного отключения компрессора. Доступен четырехпортовый

коллекторный стиль, который обеспечивает средства для легкого крепления клапанов и датчиков.

- Устойчивый к коррозии и неметаллический чехол
- Без проволоки
- Видимый контакт
- Нет настройки давления дрейфа
- Винт с закрытой крышкой
- Широкая Проводная комната
- 2 винта заземления
- Легко регулировать
- Автоматический разгрузочный клапан в наличии
- Пульсационный демпфер стандарт

LF10

LEFOO

LF10-1H
4-7kg
5-7kg
5-8kg
5.5-8kg
6-8kg
7-9kg
7-10kg
9-12.5kg

LF10A-1H
6-8kg
5-8kg

LF10-4H
5-7kg
6-8kg

LF10A-4H
5-8kg
6-8kg


LEFOO

cULus
E228981

cSPus
220707

CCC
AD30034

TÜV CE

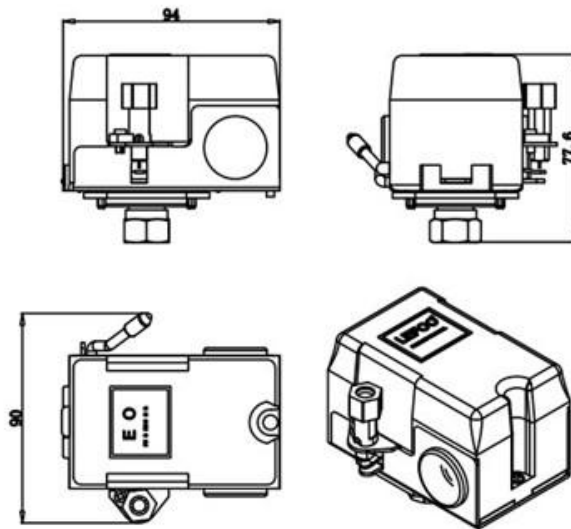

尺寸单位:mm

LF10

空气压缩机压力开关





LF10 series pressure switch is used to control the pressure in the air compressor gas tank, making it run between two preset pressure values (up to 175PSI). The pressure switch with load release valve can prevent the air compressor from overload starting, and the additional handle can be used to manually cut off the power supply of the compressor. The four-way Base interface makes the installation of supporting components such as safety valve and pressure gauge easier

Technical parameters



Type	No.	Pressure ac Scope Kg/cm ²	Differential scope Kg/cm ²	Factory Set Kg/cm ²	Rated voltage and current	Contact Mode	Interface Standard
LF10-1H LF10-4H		2.0-7.0	1.5-2.5	4.0-5.5	20A/120VAC 12A/240VAC	Normally closed	1/4, 3/8NPT Inner screw or outer screw (LF10-1H)
		2.5-10.5	2.0-3.0	6.0-8.0			
		3.5-12.5	2.5-3.5	7.5-10.5			(LF10-4H)
		5.0-13.0	3.0-4.0	9.0-12.5			
LF10A-1H LF10A-4H		2.0-7.0	1.5-2.5	4.0-5.5	26A/120VAC 26A/240VAC	Normally closed	1/4, 3/8NPT Inner screw or outer screw (LF10A-1H)
		2.5-10.5	2.0-3.0	6.0-8.0			
		3.5-12.5	2.5-3.5	7.5-10.5			Internal screw for 4X 1/4pp (LF10A-4H)
		5.0-13.0	3.0-4.0	9.0-12.5			



Unit conversion: 1Kg/cm² = 14.2PSI 1Bar = 14.5PSI

Other interfaces can be customized according to customer requirements,

The Order Number of LF10 is for example:

FLF 10(A) -1H 11111-6.0kg/cm-8.0kg/cm

I pressure setting: closing pressure: 6 kg/cm disconnecting pressure: 8kg/cm *
a handle form: long curved handle one r-
elease valve inner diameter: 6.0mm-rele-
ase valve form: vertical one interface
thread: 1/4npp-Interface form: single-p-
ass one Interface form: internal thread

Size Unit: mm (Dimension in mm)

Serial Numt	Interface form	Interface threa	Release valve fo	Inner diameter	Handle form
0	/	/	/	No release val	No release valve
1	Single F	internal thre	1/4NPT	Vertical	Medium 6.0mm
2	/	outside thread	3/8NPT	Horizontal	Medium 6.4mm
3	/	/	R1/4	/	6.5mm
4	Si Tong	/	R3/8	/	/
5	/	/	G1/4	/	/
6	/	/	G3/8	/	/

MK-ACPS02



Air Compressor Pressure Switch MK-ACPS02

Maker Electric Maker Electric



Air Compressor Pressure Switch Air Compressor Pressure Switch
MK-ACPS02 MK-ACPS02

- Certification: CCC, CE, RoHS, Warranty: pressure switch, Switch Type: Pressure Switch, Model Number: MK-ACPS02, Features: pressure switch, Brand Name: makerele, Item Type: Switches, Place of Origin: Zhejiang China (Mainland)
- Pipe Fittings: G1/4, G3/8 or 1/4, 3/8 NPT Female, Frequency: 50Hz, Port: one / four, Contact Arrangement: Normally Open(NO), Operating Temperature Range: -30~55C C, Operating Pressure Range: 0.5~1.2Mpa, Differential Pressure: 0.2Mpa, Factory Setting: 0.6~0.8 Mpa

Specifications

air compressor pressure regulator switch

Model: MK-ACPS02

used for air compressor

240V, 20A, 50Hz

Port: one / four

Product Description


Air Compressor Pressure Regulator Switch MK-ACPS02 TECHNICAL DATA

MODEL	MK-ACPS02-1	MK-ACPS02-4
Medium	Air	Air
Operating Pressure Range	0.5~1.2Mpa	0.5~1.2Mpa
Differential Pressure	0.2Mpa	0.2Mpa
Factory Setting	0.6~0.8 Mpa	0.6~0.8 Mpa
Operating Temperature Range	-30~55° C	-30~55° C
Electrical Rating	240V, 20A, 50Hz	240V, 20A, 50Hz
Contact Arrangement	Normally Open(NC)	Normally Open(NC)
Port	one port	four ports
Pipe Fittings	G1/4, G3/8 or 1/4, 3/8 NPT Female	G1/4, G3/8 or 1/4, 3/8 NPT Female

Other Pressure Swettings and Differential are available on request.

Conversion: 1Mpa =10.2 Kg/cm2 , Kg/cm2 = 14.2PSI , 1bar = 14.5PSI

Search results for: MK-ACPS07

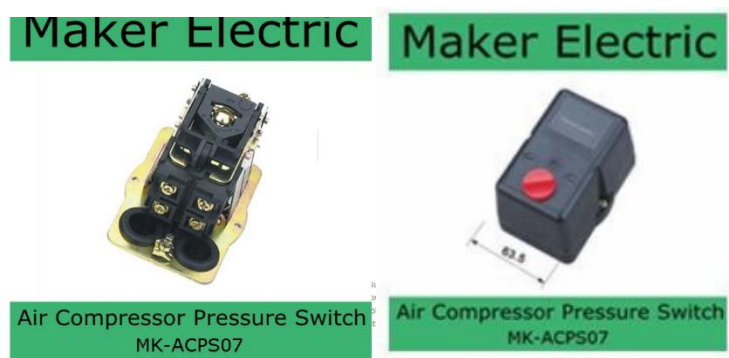

umber:	MK-ACPS07			
Max. Current:	16A	Max. Voltage:	250V	Max. Working Pressure:11.0bar
Pipe Fittings:	G1/4" or G1/2" Female	Max Rated Current:	16A 2.0- 3.0/4.0-	Rated Voltage: 250V
Contact Arrangement:	NC	Factory Setting (bar):	5.5	Differential (bar): 0.8- 3.5/1.0-4.0
Max Off (Cut-Out) (bar):	6.0/11.0	Min ON (Cut-In) (bar):	1.0/2.0	Model: MK- ACPS07
heap air compressor pressure control switch MK-ACPS07 used for air compressor Quality: Standard 1/4" Male or Female NPT				

