


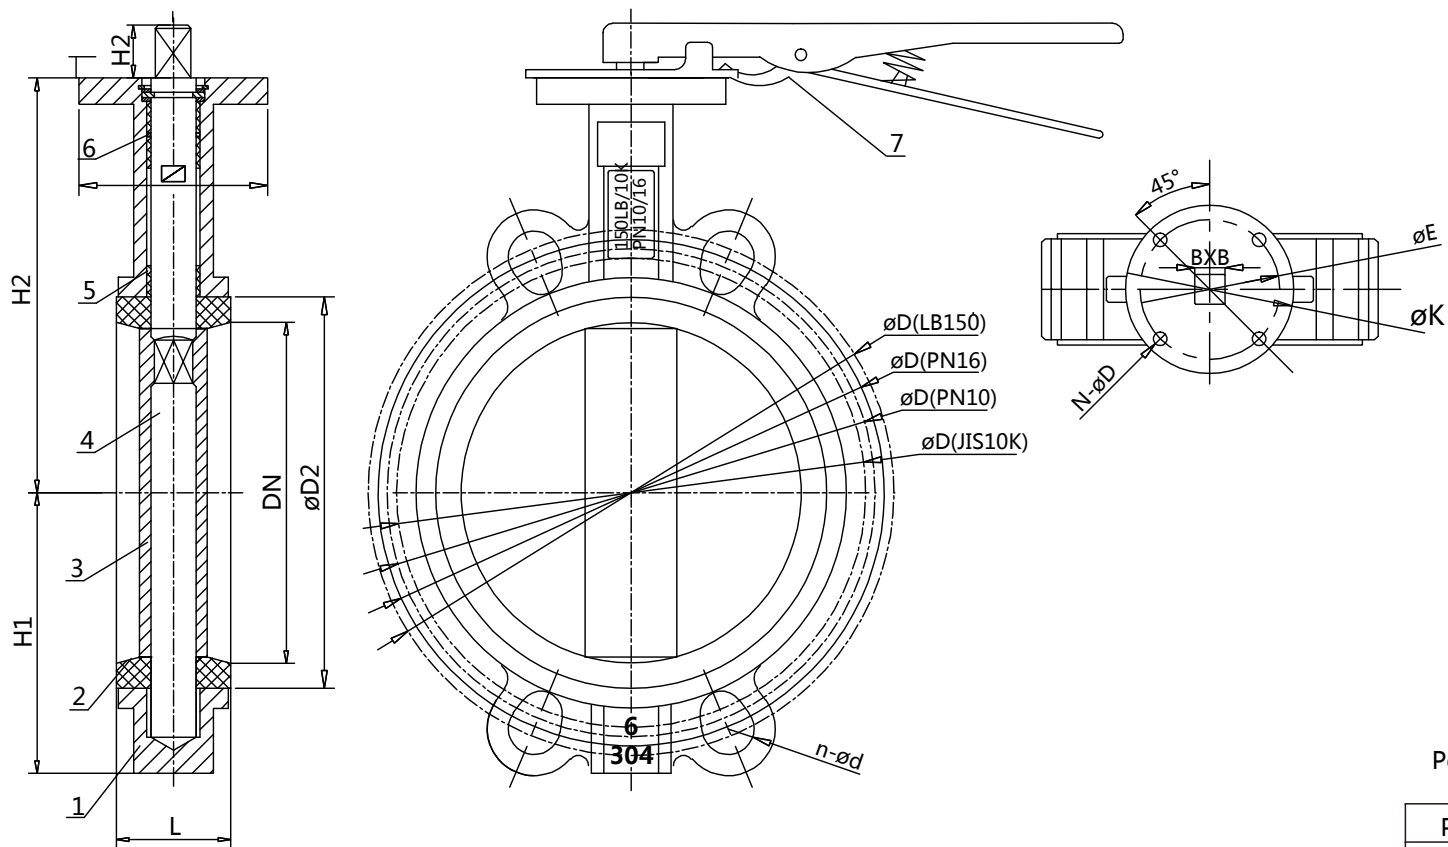

NO.	Name	Material
1	Body	DI
2	Ring	NBR
3	Wedge	304
4	Stem	410
5	Bush	Qsn-4
6	O-ring	EPDM
7	Worm gear	Q235

Accepted standards

Design&Manufacturing	GB/T12238
	API 609
	JIS 2032
Face to Face	GB/T12221
	API 609
	JIS 2032
Fange Dimensions	GB/T17241.6
	ASME B16.5
	JIS B2213
Test	GB/T13927
	API 598
	JIS B2003

Performance standard

Pound(PN/CL/10K)	1.6Mpa/150LB/10K	
Shell Test	Liquid	2.4Mpa/3.0Mpa/3.0Mpa
Sealing Test		1.76Mpa/2.2Mpa/2.2Mpa
Hermetial Sealing Test	gas	0.6Mpa
Suit Temperature	-29-120	

Unit: mm

cc	L	H	H1	H2	K	E	BXB	N-ØD	ISO	PN10		PN16		CL150		JIS10K	
										ØD	n-Ød	ØD	n-Ød	ØD	n-Ød	ØD	n-Ød
DN50	42	126	70	15	65	50	9X9	4-Ø7.5	F05	125	4-Ø19	125	4-Ø19	120.5	4-Ø19	120	4-Ø19
DN65	44.5	137	77	15	65	50	9X9	4-Ø7.5	F05	145	4-Ø19	145	4-Ø19	139.5	4-Ø19	140	4-Ø19
DN80	44.5	143	92	15	65	50	9X9	4-Ø7.5	F05	160	8-Ø19	160	8-Ø19	152.5	4-Ø19	150	8-Ø19
DN100	51	164	105	15	90	70	11X11	4-Ø10	F07	180	8-Ø19	180	8-Ø19	190.5	8-Ø19	176	8-Ø19
DN125	54.5	177	120	18	90	70	14X14	4-Ø10	F07	210	8-Ø19	210	8-Ø19	216	8-Ø22	210	8-Ø23
DN150	54.5	198	134	18	90	70	14X14	4-Ø10	F07	240	8-Ø23	240	8-Ø23	241.5	8-Ø22	240	8-Ø23

USER:			
ITEM:			
DRAWING:	NAME: Butterfly valve		
AUDITING:	DRAWING: D071XL/P-16Q/ITEM CODE		
APPROVEZ:	DESCRPTTION	FRIGURE NO.	VER NO.
	Final assembly diagram	20170516-4	A