

PRODUCT USES

WATER SOLENOID VALVE OF TYPE ZCS SUITABLE FOR WATER OR LIQUID FOR WORKING MEDIUM, IT CAN AUTO-CONTROL OR REMOTE CONTROL THE ON/OFF OF THE PIPELINE WITH THE WATER, OIL, LIQUID ETC., WORKING MEDIUM.


STANDARD SPECIFICATION

DESIGN AND MANUFACTURE		JB/T 7352
DIMENSION OF CONNECTION	FRAME LENGTH	GB/T 12221
	DIMENSION OF FLANGE	GB/T 9115 GB/T 17241
	DIMENSION OF THREAD	GB/T 7307
INSPECT AND TEST		JB/T 7352
MATERIAL	STAINLESS STEEL	GB/T 12230
	CARBON STEEL	GB/T 12229
	CAST IRON	GB/T 12226
MARK		GB/T 12220
SUPPLIER		JB/T 7928



TECHNICAL PARAMETER

DN (mm)	10~500
PN (MPa)	1.0
OPERTING PRESSURE (MPa)	0.02~1.0
SUITABLE MEDIUM	AIR, WATER, OIL (VISCOSITY $\leq 4^{\circ}$ E)
MEDIUM TEMP. (°C)	0~80
WORKING TYPE	NORMALLY OPEN, NORMALLY CLOSED
USING CONDITION	NORMAL, EXPLOSION-PROOF
POWER (W)	4~15
VOLTAGE	220V AC (OTHERS CAN BE SUBSCRIBED)
MATERIAL OF BODY	HT200 WCB CF8

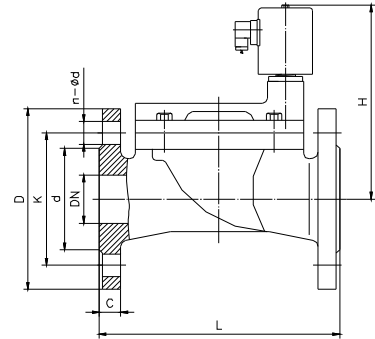

DIMENSION OF OUTSIDE

DN	H	L	D	K	d	C	n-Φd
10	125	130	90	60	41	14	4-14
15	125	140	95	65	46	14	4-14
20	125	150	105	75	56	16	4-14
25	130	160	115	85	65	16	4-14
32	137	180	140	100	76	18	4-19
40	152	200	150	110	84	18	4-19
50	164	230	165	125	99	20	4-19
65	222	290	185	145	118	20	4-19
80	253	310	200	160	132	22	8-19
100	260	350	220	180	156	24	8-19
125	315	400	250	210	184	26	8-19
150	350	480	285	240	211	26	8-23
200	390	600	340	295	266	26	8-23
250	430	730	395	350	319	28	12-23
300	480	850	445	400	370	28	12-23
350	555	980	505	460	429	30	16-23
400	630	1100	565	515	480	32	16-28
450	705	1200	615	565	530	32	20-28
500	780	1250	670	620	582	34	20-28