

Pneumatic butterfly valve

气动蝶阀



Performance standard


Pound(PN/CL/10K)	1.6Mpa/150LB/10K	
Shell Test	Liquid	2.4Mpa/3.0Mpa/3.0Mpa
Sealing Test		1.76Mpa/2.2Mpa/2.2Mpa
Hermetial Sealing Test	gas	0.6Mpa
Suit Temperature	-29-120	

Accepted standards

Design&Manufacturing	GB/T12238
	API 609
	JIS 2032
Face to Face	GB/T12221
	API 609
	JIS 2032
Fange Dimensions	GB/T17241.6
	ASME B16.5
	JIS B2213
 Test	GB/T13927
	API 598
	JIS B2003

Pneumatic butterfly valve

气动蝶阀

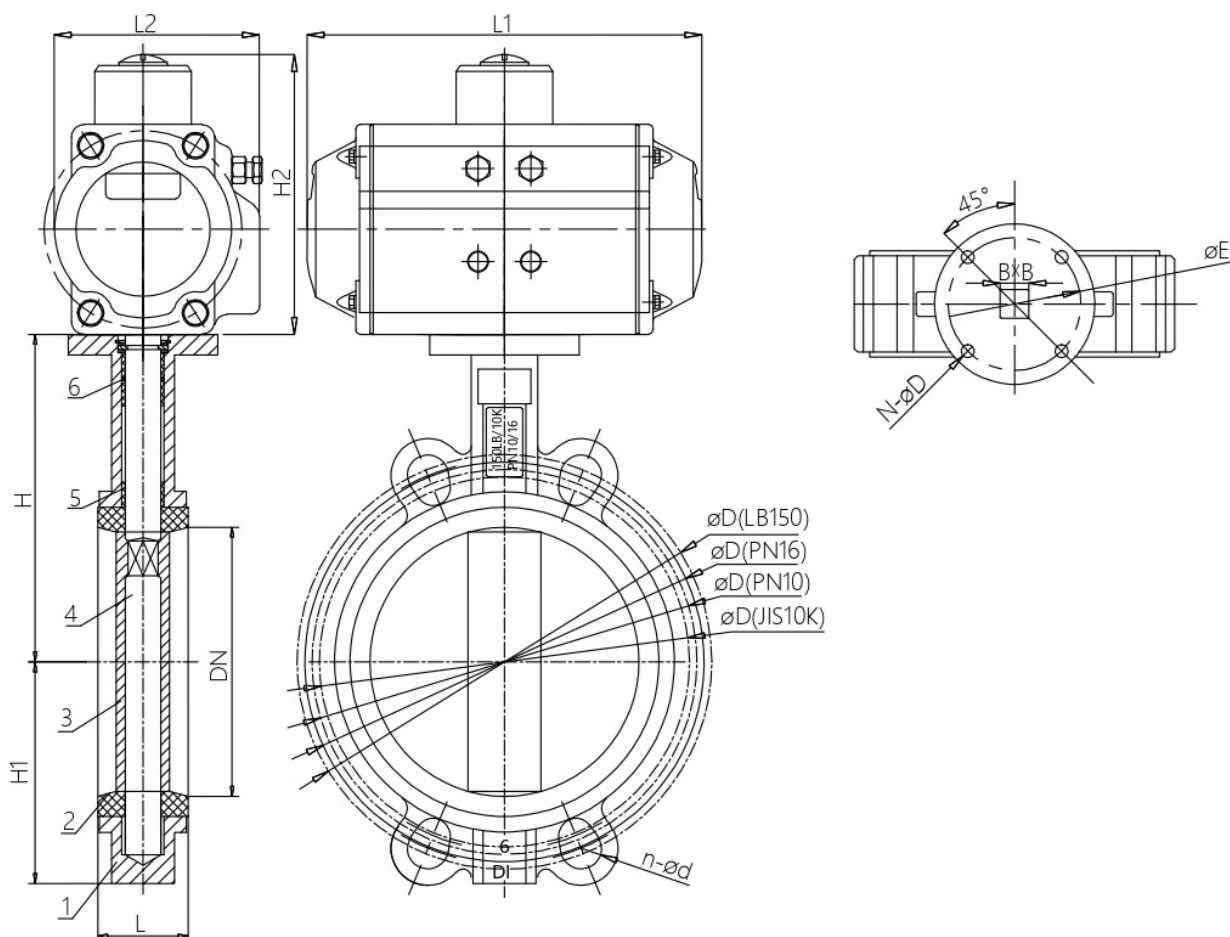

DN	L	H	H1	E	BXB	N- ϕD	ISO	PN10		PN16		CL150		JIS10K		AT	L1	L2	H2
								ϕD	n- ϕd	ϕD	n- ϕd	ϕD	n- ϕd	ϕD	n- ϕd				
DN40	33	126	70	42	9X9	4- $\phi 6.5$	F04	110	4- $\phi 19$	110	4- $\phi 19$	98.5	4- $\phi 16$	105	4- $\phi 19$	50	146	70.5	15
DN50	42	126	70	50	9X9	4- $\phi 7.5$	F05	125	4- $\phi 19$	125	4- $\phi 19$	120.5	4- $\phi 19$	120	4- $\phi 19$	63	163	83.5	15
DN65	44.5	137	77	50	9X9	4- $\phi 7.5$	F05	145	4- $\phi 19$	145	4- $\phi 19$	139.5	4- $\phi 19$	140	4- $\phi 19$	75	214	94	15
DN80	44.5	143	92	50	9X9	4- $\phi 7.5$	F05	160	8- $\phi 19$	160	8- $\phi 19$	152.5	4- $\phi 19$	150	8- $\phi 19$	88	252	105	15
DN100	51	164	105	70	11X11	4- $\phi 10$	F07	180	8- $\phi 19$	180	8- $\phi 19$	190.5	8- $\phi 19$	175	8- $\phi 19$	100	270	120	15
DN125	54.5	177	120	70	14X14	4- $\phi 10$	F07	210	8- $\phi 19$	210	8- $\phi 19$	216	8- $\phi 22$	210	8- $\phi 23$	115	316	129	18
DN150	54.5	198	134	70	14X14	4- $\phi 10$	F07	240	8- $\phi 23$	240	8- $\phi 23$	241.5	8- $\phi 22$	240	8- $\phi 23$	125	354	147.5	18
DN200	60	231	171	102	17X17	4- $\phi 12$	F10	295	8- $\phi 23$	295	12- $\phi 23$	298.5	12- $\phi 25$	290	12- $\phi 23$	145	418	167	21
DN250	66	261	204	102	22X22	4- $\phi 12$	F10	350	12- $\phi 23$	355	12- $\phi 27$	362	12- $\phi 25$	355	12- $\phi 25$	164	450	193	26
DN300	76	295	241	102	22X22	4- $\phi 12$	F10	400	12- $\phi 23$	410	12- $\phi 27$	432	12- $\phi 29$	400	16- $\phi 25$	190	518	208	26
DN350	76	355	271	102	22X22	4- $\phi 12$	F10	460	16- $\phi 23$	470	16- $\phi 27$	476	16- $\phi 29$			210	530	226	26
DN400	86	366	298	140	27X27	4- $\phi 18$	F14	515	16- $\phi 27$	525	16- $\phi 30$	539.5	16- $\phi 32$			210	660	258	31
DN450	105	401	331	140	27X27	4- $\phi 18$	F14	565	20- $\phi 27$	585	20- $\phi 30$	578	16- $\phi 32$			270	730	294	31
DN500	125	438	369	140	32X32	4- $\phi 18$	F14	620	20- $\phi 27$	650	20- $\phi 33$	635	20- $\phi 32$			300	880	333	31
DN600	152	568	450	165	36X36	4- $\phi 22$	F16	725	20- $\phi 30$	770	20- $\phi 36$	749.5	20- $\phi 35$			350	910	380	40