


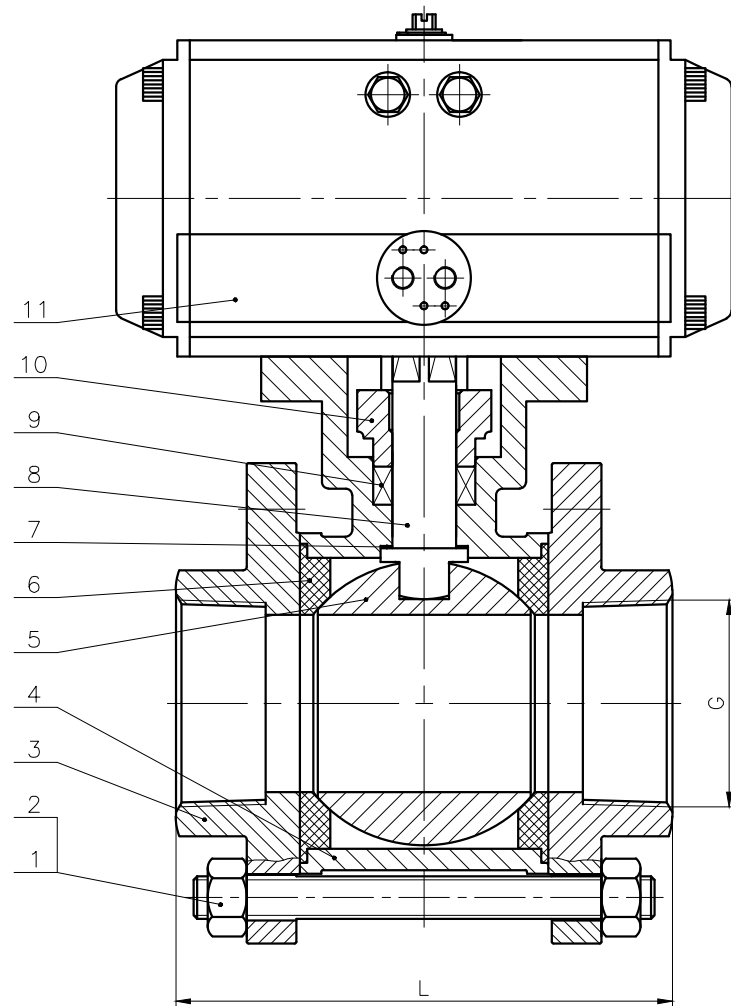

DN	G	L
15	½"	68
20	¾"	78
25	1"	86
32	1¼"	100
40	1½"	108
50	2"	129
65	2½"	165
80	3"	192
100	4"	243

Performance Sheet	
Nominal pressure	1.6MPa
Shell Test	2.4MPa
Seal Test	1.76MPa
Back Seat Test	—
Gas Seal Test	0.6MPa
Design temperature	−29℃~150℃
Suitable medium	Weakly corrosive medium

11	Pneumatic actuator	Part	
10	Gland	CF8	
9	Stem packing	PTFE	
8	Stem	SS304	
7	Upper seal gasket	PTFE	
6	Seat	PTFE	
5	Ball	SS304	
4	Body	CF8	
3	End connector	CF8	
2	Nut	8M	
1	Bolt	B8M-CL2	
NO.	DESCRIPTION	MAT.	REMARK

Mainly Applicable Standards

- 1、Design and manufacture as per GB/T 12237 standard.
- 2、End to end dimension be established by the manufacturer.
- 3、Thread end dimension as per GB/T 7307 standard.
- 4、Test & inspection as per GB/T 13927 standard.

APPROVED BY		CHECKED BY	
REVIEWED BY		DESIGNED BY	
DATE		SCALE	
		BALL VALVE	
		DWG.NO. Q611F-16P	