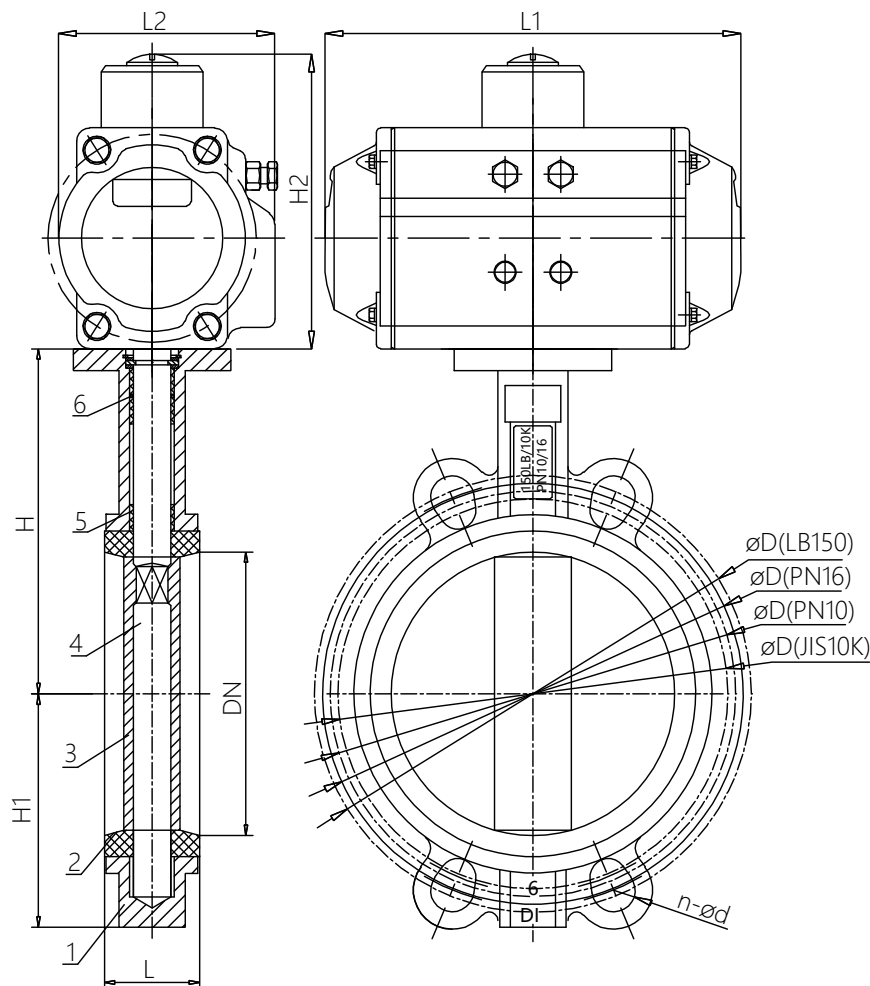


NO.	Name	Material
1	Body	DI
2	Ring	EPDM
3	Wedge	CF8
4	Stem	410
5	Bush	Qsn-4
6	O-ring	EPDM

Accepted standards

Design&Manufacturing	GB/T12238
	API 609
	JIS 2032
Face to Face	GB/T12221
	API 609
	JIS 2032
Fange Dimensions	GB/T17241.6
	ASME B16.5
	JIS B2213
Test	GB/T13927
	API 598
	JIS B2003

Performance standard

Pound(PN/CL/10K)	1.6Mpa/150LB/10K	
Shell Test	Liquid	2.4Mpa/3.0Mpa/3.0Mpa
Sealing Test		1.76Mpa/2.2Mpa/2.2Mpa
Hermetial Sealing Test	gas	0.6Mpa
Suit Temperature	-29-120	

DRAWING:	NAME: Butterfly valve		
AUDITING:	DRAWING: D071XL/P-16Q/ITEM CODE		
APPROVEZ:	DESCRPTTION	FRIGURE NO.	VER NO.
	Final assembly diagram	20170516-4	A

DN	L	H	H1	E	BXB	N-øD	ISO	PN10		PN16		CL150		JIS10K		AT	L1	L2	H2
								øD	n-ød	øD	n-ød	øD	n-ød	øD	n-ød				
DN40	33	126	70	42	9X9	4-ø6.5	F04	110	4-ø19	110	4-ø19	98.5	4-ø16	105	4-ø19	50	146	70.5	15
DN50	42	126	70	50	9X9	4-ø7.5	F05	125	4-ø19	125	4-ø19	120.5	4-ø19	120	4-ø19	63	163	83.5	15
DN65	44.5	137	77	50	9X9	4-ø7.5	F05	145	4-ø19	145	4-ø19	139.5	4-ø19	140	4-ø19	75	214	94	15
DN80	44.5	143	92	50	9X9	4-ø7.5	F05	160	8-ø19	160	8-ø19	152.5	4-ø19	150	8-ø19	88	252	105	15
DN100	51	164	105	70	11X11	4-ø10	F07	180	8-ø19	180	8-ø19	190.5	8-ø19	175	8-ø19	100	270	120	15
DN125	54.5	177	120	70	14X14	4-ø10	F07	210	8-ø19	210	8-ø19	216	8-ø22	210	8-ø23	115	316	129	18
DN150	54.5	198	134	70	14X14	4-ø10	F07	240	8-ø23	240	8-ø23	241.5	8-ø22	240	8-ø23	125	354	147.5	18
DN200	60	231	171	102	17X17	4-ø12	F10	295	8-ø23	295	12-ø23	298.5	12-ø25	290	12-ø23	145	418	167	21
DN250	66	261	204	102	22X22	4-ø12	F10	350	12-ø23	355	12-ø27	362	12-ø25	355	12-ø25	164	450	193	26
DN300	76	295	241	102	22X22	4-ø12	F10	400	12-ø23	410	12-ø27	432	12-ø29	400	16-ø25	190	518	208	26
DN350	76	355	271	102	22X22	4-ø12	F10	460	16-ø23	470	16-ø27	476	16-ø29			210	530	226	26
DN400	86	366	298	140	27X27	4-ø18	F14	515	16-ø27	525	16-ø30	539.5	16-ø32			210	660	258	31
DN450	105	401	331	140	27X27	4-ø18	F14	565	20-ø27	585	20-ø30	578	16-ø32			270	730	294	31
DN500	125	438	369	140	32X32	4-ø18	F14	620	20-ø27	650	20-ø33	635	20-ø32			300	880	333	31
DN600	152	568	450	165	36X36	4-ø22	F16	725	20-ø30	770	20-ø36	749.5	20-ø35			350	910	380	40