


US系列二位二通顶尖式蒸汽电磁阀

2/2 WAY PILOT-OPERATED STEAM SOLENOID VALVES



订购码 Ordering Code				
US	-	15	-	SS - F - AC220V
二位二通电磁阀 2/2 Way Solenoid Valve	接管口径 Port Size	阀体材料 Stainless Steel S.S.: 不锈钢 Brass: 黄铜	空白: 螺纹 F: 法兰 Blank: Thread F: Flange	标准电压 Standard Voltage DC12V DC24V AC24V 50Hz/60Hz AC110V 50Hz/60Hz AC220V 50Hz/60Hz AC380V 50Hz/60Hz
	15: 1/2" 20: 3/4" 25: 1" 35: 1 1/4" 40: 1 1/2" 50: 2"			

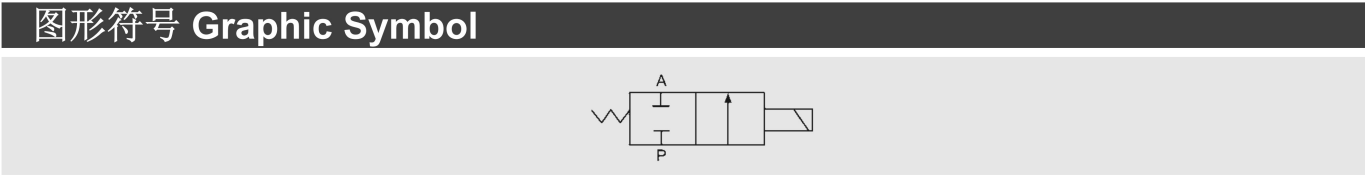


规格 Specification						
型 号/Model	US-15	US-20	US-25	US-35	US-40	US-50
工作介质/Working Medium	空气、水、蒸汽 / Air,Water,Steam					
动作方式/Operation	先导式 / Pilot operated					
型式/Acting Type	常闭式 / Normally Closed					
流量孔径/Orifice Size (mm)	17		22	30		50
CV值/CV Value	4.8		12	20		48
接管口径/Port Size	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
使用流体粘滞度/Operation Fluid Viscosity	20 CST以下 (Below)					
使用压力/Operating Pressure	空气、水、蒸汽 / Air,Water,Steam: 0.1~1.5Mpa					
最大耐压力/Max. Pressure Resistance	1.5Mpa					
工作温度/Operating Temperature	-5 ~ 185℃					
使用电压范围/Voltage Range	± 10%					
本体材质/Material of Body	黄铜 / Brass					
油封材质/Material of Oil Seal	PTFE					

US系列二位二通顶尖式蒸汽电磁阀

2/2 WAY PILOT-OPERATED STEAM SOLENOID VALVES


外形图 Overall Dimension

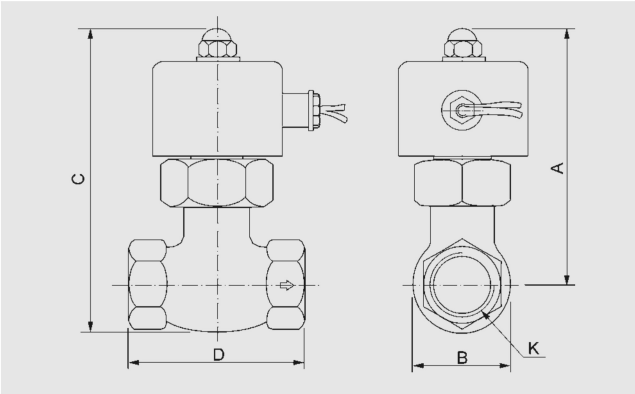


尺寸表 Dimension Sheet

型 号 Model	A	B	C	D	K
US-10	125	42	146	84	ZG3/8"
US-15	125	42	146	84	ZG1/2"
US-20	125	42	146	84	ZG3/4"
US-25	136	52	162	94	ZG1"
US-35	148	74	183	111	ZG1 1/4"
US-40	147	74	183	111	ZG1 1/2"
US-50	176	86	223	165	ZG2"

流量图 Flow Chart

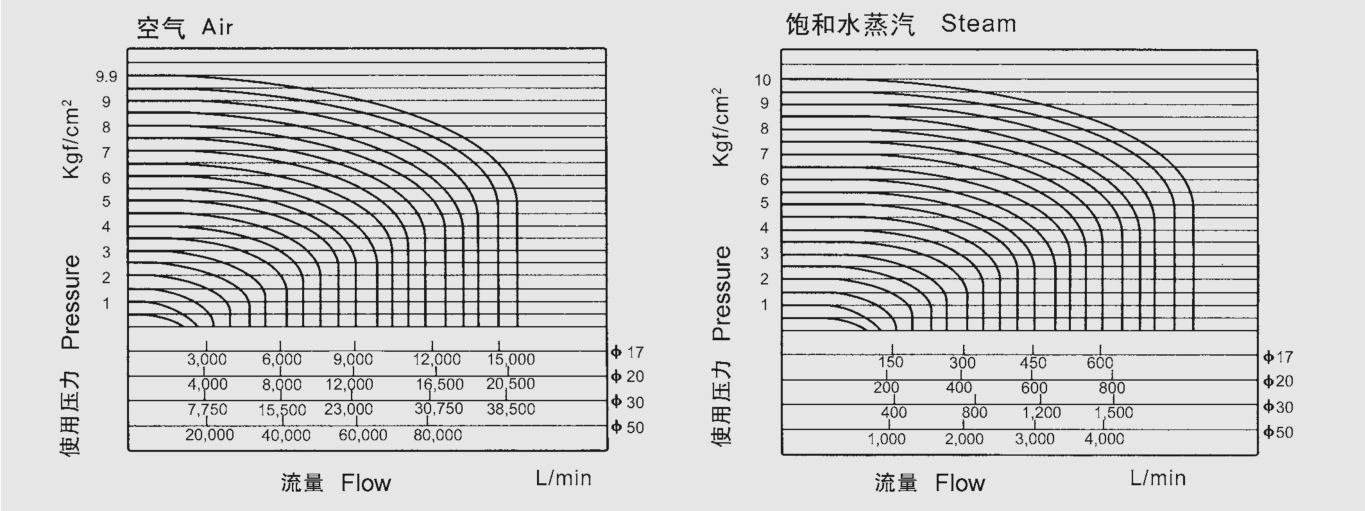

内部结构 Inside Structure

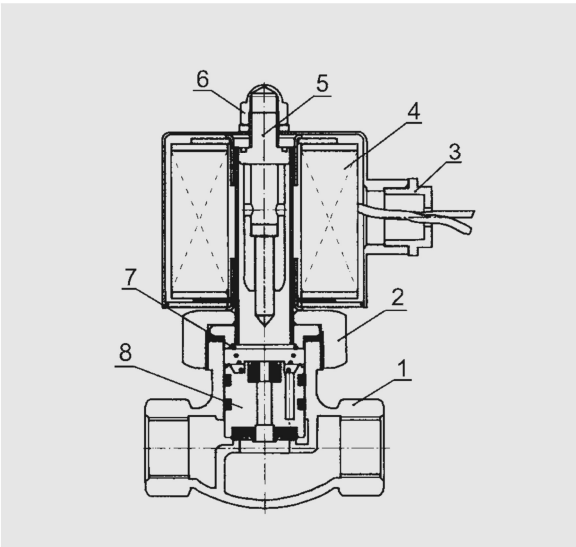

序号 NO.	名 称 Name
1	阀体/Valve body
2	六角螺母/Hexagonal nut
3	出线设套/Loire cover
4	线圈组合/Coil combination
5	可动铁组合/Movablecore
6	螺母/Nut
7	压缩弹簧/Compressed spring
8	活塞/Piston