

K系列滑柱式换向阀(二位五通)

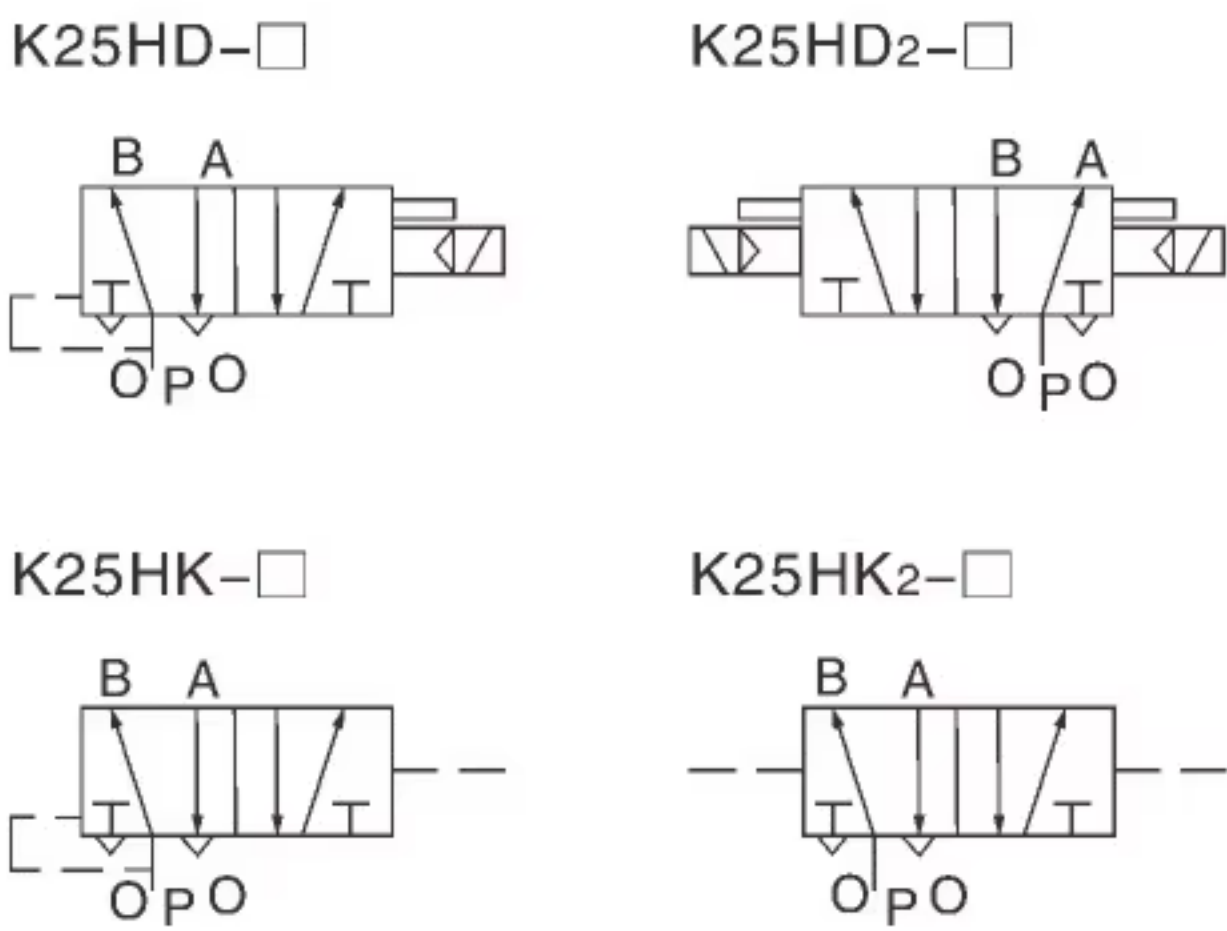
K Series 5/2 Solenoid Valve



● 订购码 Ordering Code

K25H	D	8
规格代码 Specification	控制方式 Control methods	接管口径 Port size
K系列二位五通 滑柱式气动换向阀 K series 5/2 way solenoid stop valve	D:单电控 D2:双电控 K:单气控 K2:双气控 D:Single electronic control D2:Double electronic control K:Single Pneumatic control K2:Double Pneumatic control	6:G1/8"(M10×1) 8:G1/4"(M12×1.25) 10:G3/8"(M16×1.5) 15:G1/2"(M20×1.5) 20:G3/4"(M27×2) 25:G1/4"(M33×2) 32:G1 1/4"(M42×2) 40:G1 1/2"(M48×2) 50:G2"(M60×2)

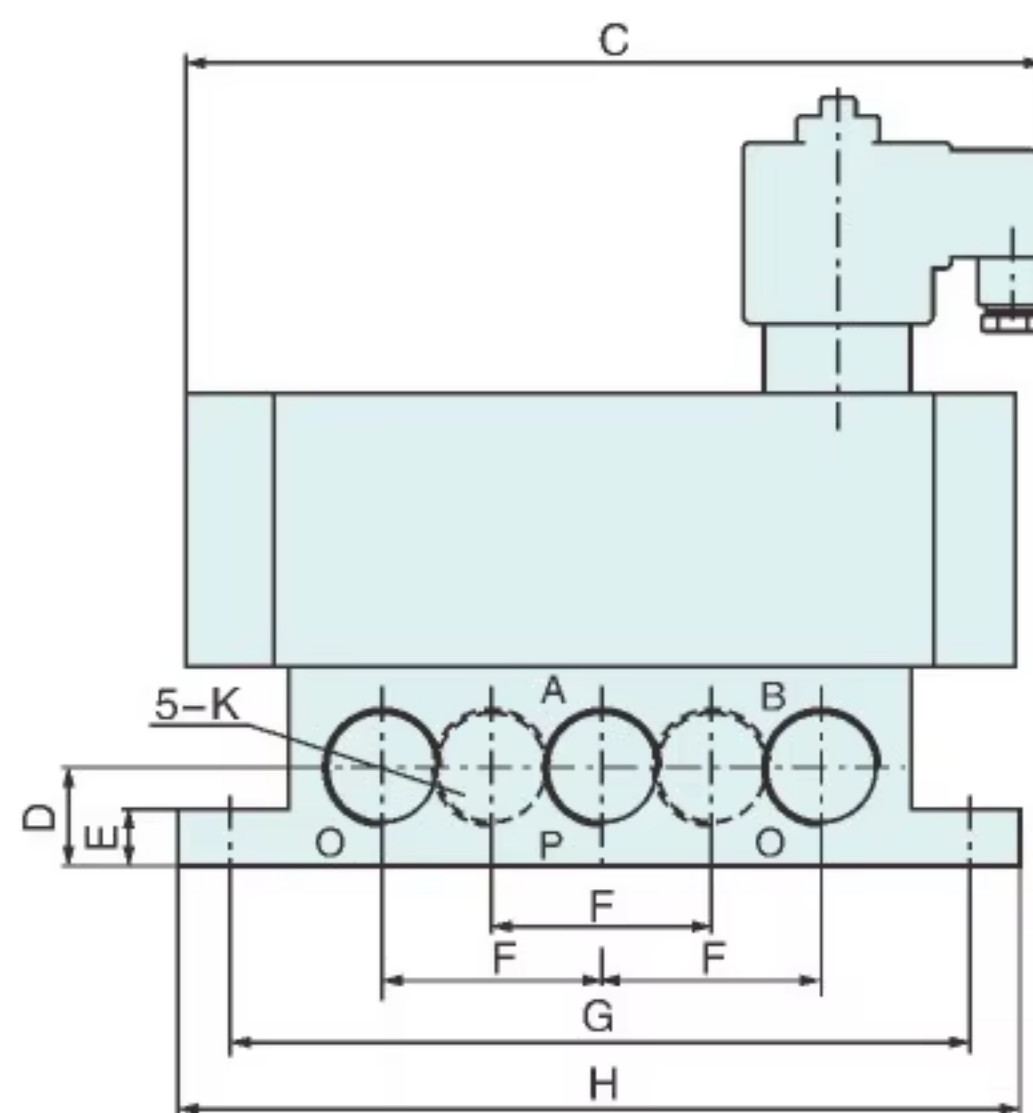
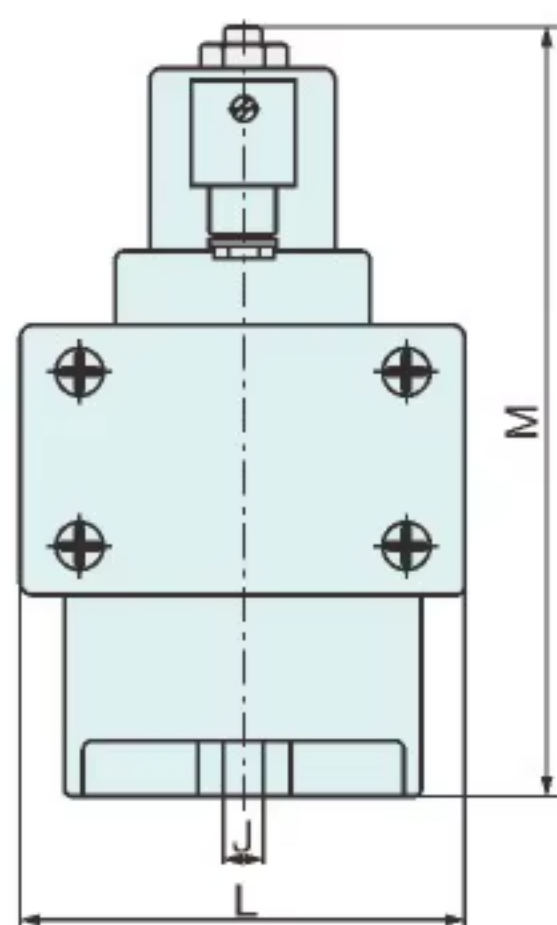
● 图形符号 Symbol



● 规格表 Specifications

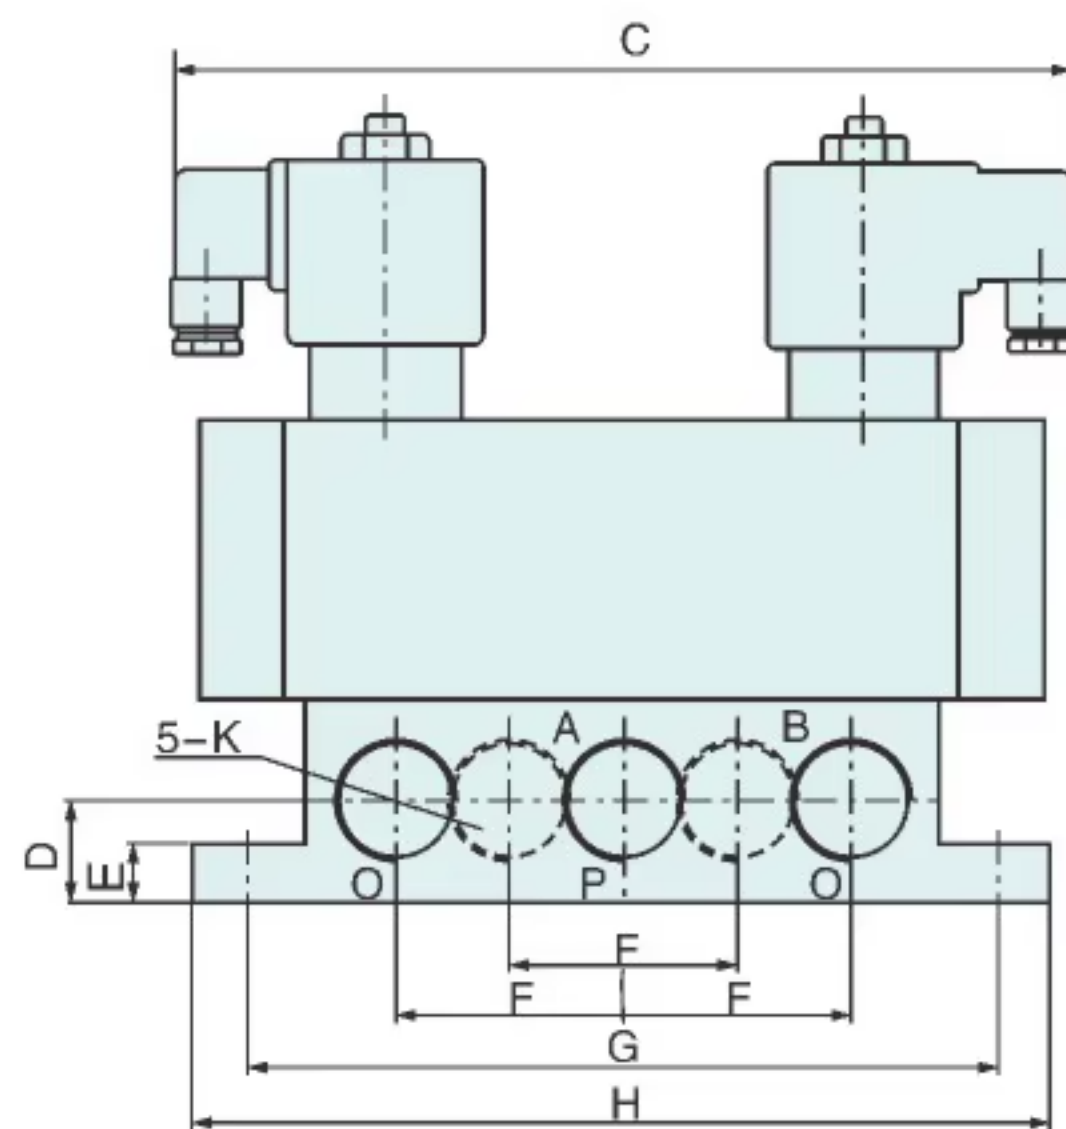
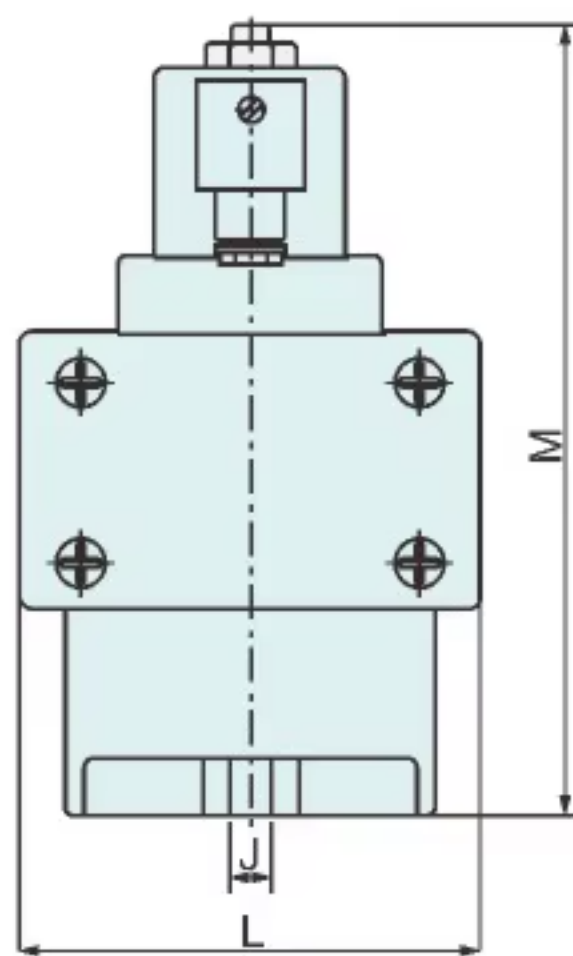
参数 Parameter	订购码 Ordering code	K25HD-6 K25HD2-6 K25HK-6 K25HK2-6	K25HD-8 K25HD2-8 K25HK-8 K25HK2-8	K25HD-10 K25HD2-10 K25HK-10 K25HK2-10	K25HD-15 K25HD2-15 K25HK-15 K25HK2-15	K25HD-20 K25HD2-20 K25HK-20 K25HK2-20	K25HD-25 K25HD2-25 K25HK-25 K25HK2-25
使用压力 Mpa Operating pressure		0.15~0.8MPa					
介质温度 °C Fluid temperature		0~55℃					
工作温度 °C Operating temperature		-5~50℃					
电源压力 V Power consumption		AC: 220,110,36: DC:24,12(气控无本项参数/Null parameter in pneumatics)					
寿命 千次 Life thousands		≥1500					
工作介质 Fluid		经净化、含有润滑油的压缩空气 Purified compressed air with lubrication					
公称通径 mm Nominal diameter		6	8	10	15	20	25
流通能力 S值mm² Negotiability		10	20	40	60	120	190
换向时间 S Reversing time		≤0.06		≤0.08		≤0.12	
换向频率 S Commutating frequency		≥10		≥8		≥5	
泄漏量 cm³/min Leakage rate		≤10		≤25		≤50	

● 外形尺寸图 Overall Dimension Drawing(mm)

K25HD-

型号 Model	接管口径 Port size	C	D	E	F	G	H	I	J	L
K25HD-6	G1/8"(M10×1)	145	14	10	28	112	130	130	9	56
K25HD-8	G1/4"(M12×1.25)									
K25HD-10	G3/8"(M16×1.5)	163	19	14	38	148	164	165	9	74
K25HD-15	G1/2"(M20×1.5)									
K25HD-20	G3/4"(M27×2)	241	15	15	60	202	234	210	11	112
K25HD-25	G1"(M33×2)									
K25HD-32	G1 ¹ / ₄ "(M42×2)	360	46	18	96	303	340	260	13	166
K25HD-40	G1 ¹ / ₂ "(M48×2)									
K25HD-50	G2"(M60×2)									

● 外形尺寸 Overall Dimension

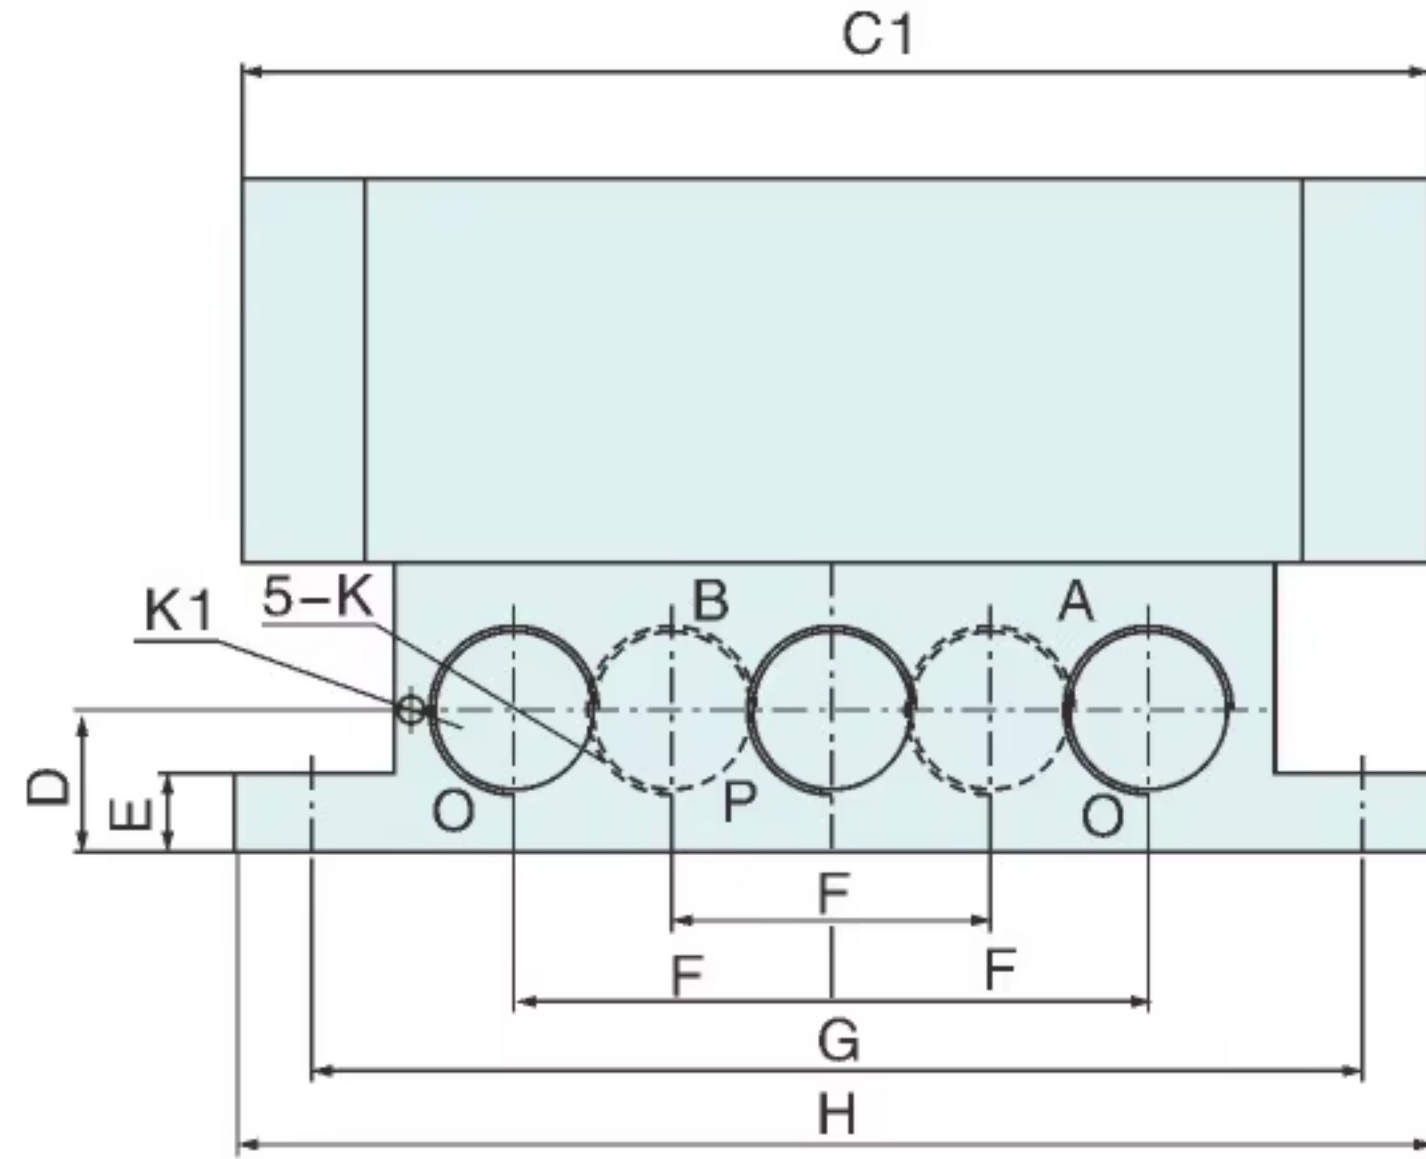
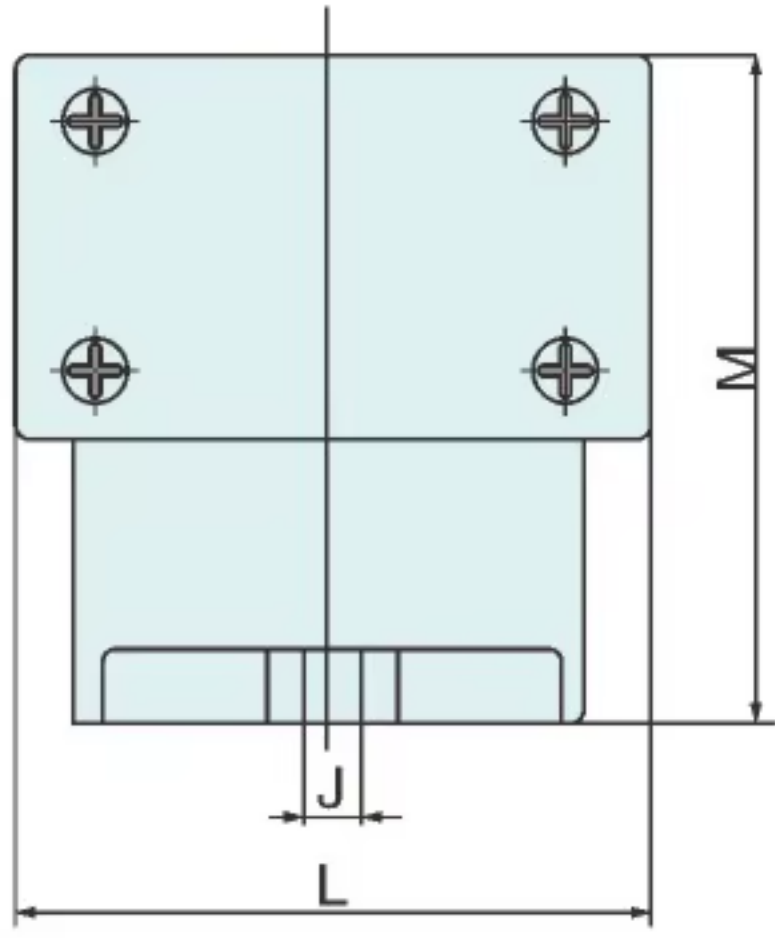
K25HD₂-□

型号 Model	接管口径 Port size	C	D	E	F	G	H	I	J	L
K25HD ₂ -6	G1/8"(M10×1)	160	14	10	28	112	130	130	9	56
K25HD ₂ -8	G1/4"(M12×1.25)									
K25HD ₂ -10	G3/8"(M16×1.5)	171	19	14	38	146	164	165	9	74
K25HD ₂ -15	G1/2"(M20×1.5)									
K25HD ₂ -20	G3/4"(M27×2)	230	25	15	60	202	234	210	11	112
K25HD ₂ -25	G1"(M33×2)									
K25HD ₂ -32	G1 1/4"(M42×2)	345	46	18	96	303	340	260	13	166
K25HD ₂ -40	G1 1/2"(M48×2)									
K25HD ₂ -50	G2"(M60×2)									

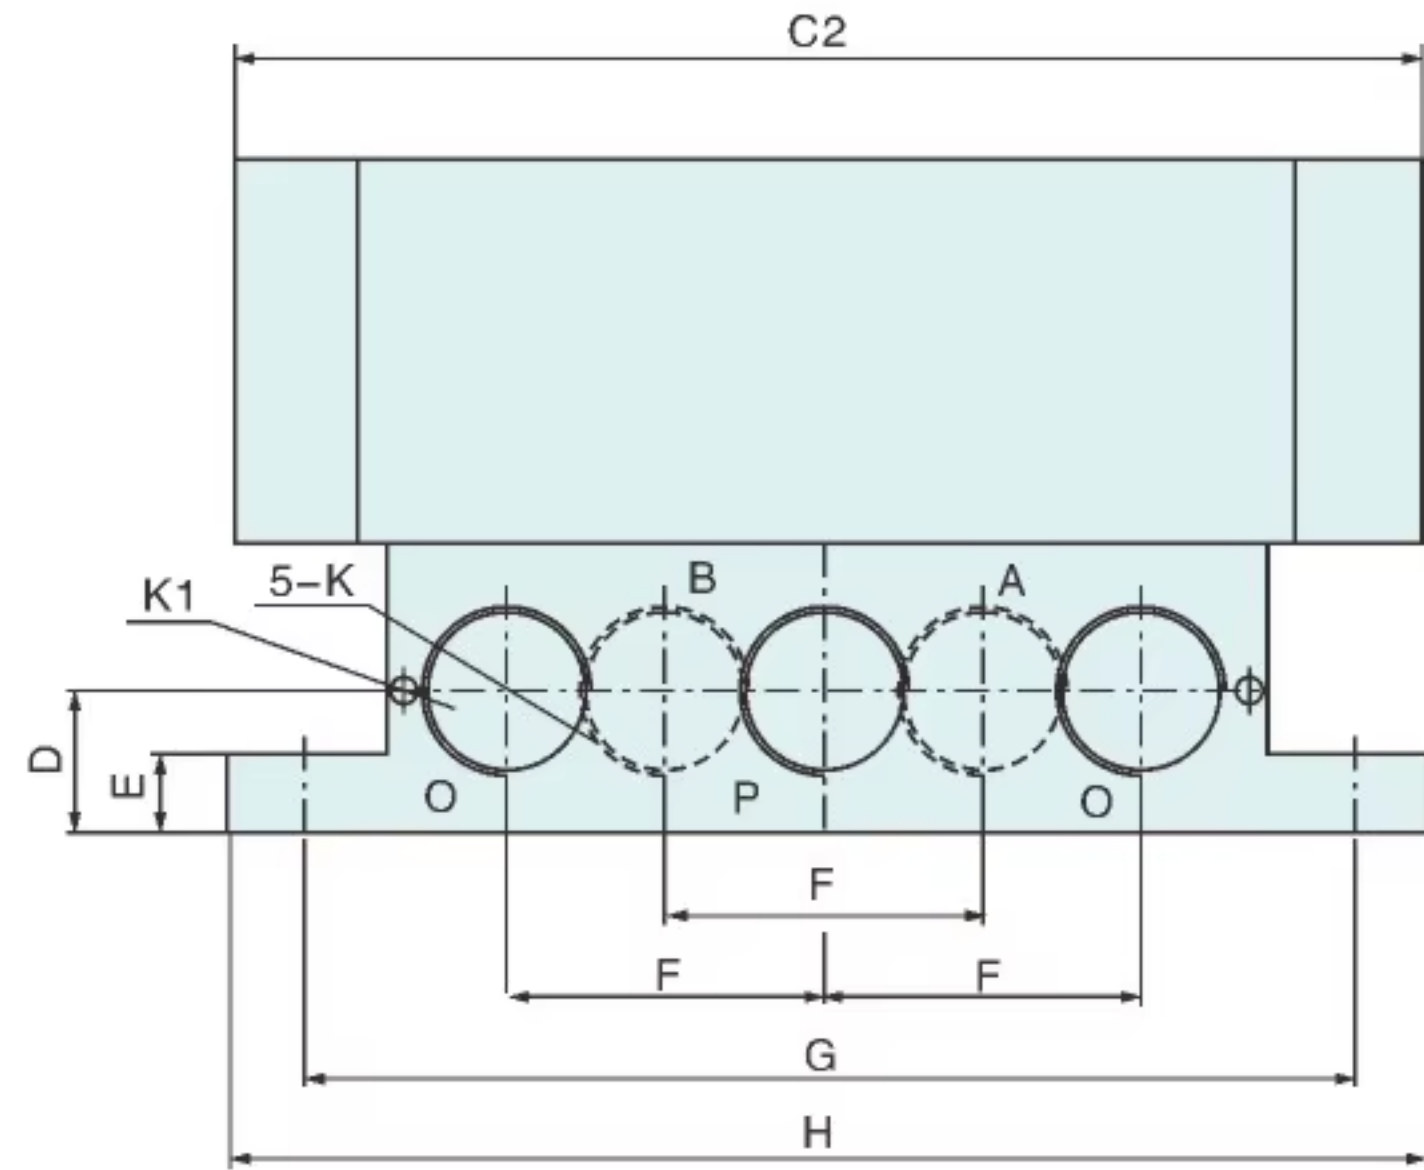
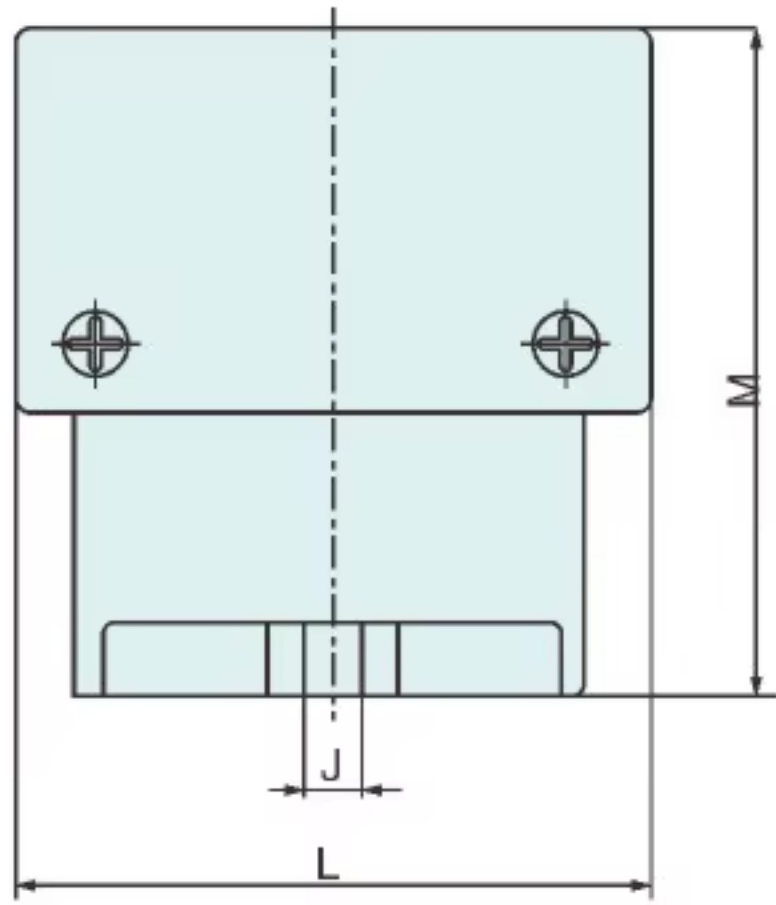
● 外形尺寸图 Overall Dimension Drawing(mm)

Air Control

K25HK-□



Air Control

K25HK₂-□

型号 Model	接管口径 Port size	C1	C2	D	E	F	G	H	M	J	L	K1
K25HK-6 K25HK-8	G1/8(M10 × 1)	130	130	14	10	28	112	130	66	9	56	M10 × 1
K25HK ₂ -8	G1/4(M12 × 1.25)											
K25HK-10 K25HK ₂ -10	G3/8(M16 × 1.5)	161	170	19	14	38	146	164	89.5	9	74	
K25HK-15 K25HK ₂ -15	G1/2(M20 × 1.5)											
K25HK-20 K25HK ₂ -20	G3/4(M27 × 2)	230	241	125	15	60	202	234	128	11	112	
K25HK-25 K25HK ₂ -25	G1(M33 × 2)											