


Model	DN1	DN2	A	B	C	D	E	F	G	L	H1	H2	H3
PW125	3/4"	3/4"	110	136	204	46	39	49.5	165	259	72	150	245.5
PW250	1"	1"	110	136	204	40	39	49.5	165	259	72	150	245.5
PW370	1"	1"	110	136	204	40	39	49.5	165	259	72	150	245.5
PW550	1"	1"	132	160	212	50	39	41.5	190	268	84	170	285
PW750	1"	1"	132	160	212	50	39	41.5	190	268	84	170	285

Model	DN1	DN2	A	B	C	D	E	F	G	L	H1	H2	H3
PW125Z	3/4"	3/4"	110	136	204	46	39	49.5	165	259	72	150	245.5
PW250Z	1"	1"	110	136	204	40	39	49.5	165	259	72	150	245.5
PW370Z	1"	1"	110	136	204	40	39	49.5	165	259	72	150	245.5
PW550Z	1"	1"	132	160	212	50	39	41.5	190	268	84	170	285
PW750Z	1"	1"	132	160	212	50	39	41.5	190	268	84	170	285

Performance Curve

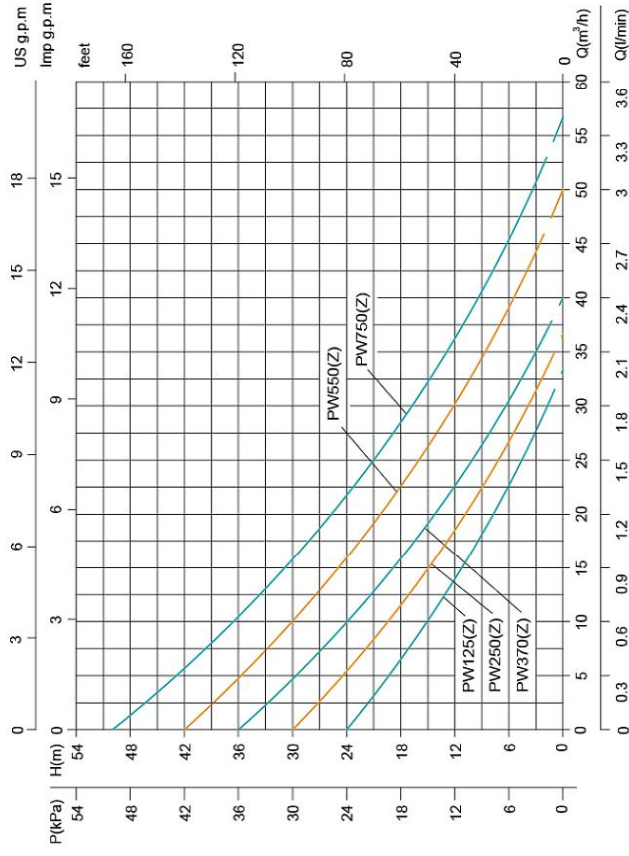

Performance Parameters

Model	Power		Max Flow (m³/h)	Max. Lift head (m)	Max. Suction lift head (m)
	kW	HP			
PW125	0.125	0.17	2	24	8
PW250	0.25	0.34	2.2	30	8
PW370	0.37	0.5	2.4	36	8
PW550	0.55	0.75	3.0	42	8
PW750	0.75	1	3.4	50	8
PW125Z	0.125	0.17	2	24	8
PW250Z	0.25	0.34	2.2	30	8
PW370Z	0.37	0.5	2.4	36	8
PW550Z	0.55	0.75	3.0	42	8
PW750Z	0.75	1	3.4	50	8

Packing Sizes

Model	Packing sizes (mm)	GW (kg)	Quantities in 20 feet cabinet
PW125(Z)		8.3	
PW250(Z)	295×230×300	9.0	
PW370(Z)		9.3	
PW550(Z)	315×245×325	12.1	
PW750(Z)		13.8	

Shimge Pump Industry Group Co.,Ltd.

Tel: +86-576-86339960 Fax: +86-576-86337079

Email: admin@shimge.com Http://www.shimge-pump.com P_C:317525

Add: Dayangcheng Industrial Zone, Daxi Town, Wenling City, Zhejiang Province, China

SHIMGE
for better life