

MIG/MAG Standard Hand Torch Range

Air cooled

MB Line


MB EVO



Torch complete Type	Rating CO2	Rating Mixed Gases	Duty cycle	Wire size
1 MB EVO 15	180 A	150 A	60%	0.6 - 1.0 mm
2 MB EVO 25	230 A	200 A	60%	0.8 - 1.2 mm
3 MB EVO 24	250 A	220 A	60%	0.8 - 1.2 mm
4 MB EVO 26	270 A	240 A	60%	0.8 - 1.2 mm
5 MB EVO 36	320 A	290 A	60%	0.8 - 1.2 mm

Liquid cooled

MB EVO

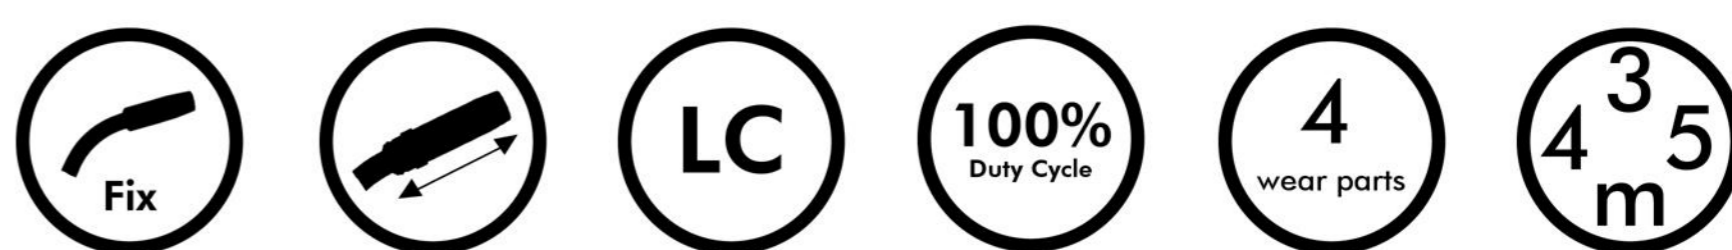


Torch complete Type	Rating CO2	Rating Mixed Gases	Duty cycle	Wire size
1 MB EVO 240 D	300 A	270 A	100%	0.8 - 1.2 mm
2 MB EVO 401 D / 401	400 A / 450 A	350 A / 400 A	100%	0.8 - 1.2 mm
3 MB EVO 501 D / 501	500 A / 550 A	450 A / 500 A	100%	1.0 - 1.6 mm

MB EVO PRO



Torch complete Type	Rating CO2	Rating Mixed Gases	Duty cycle	Wire size
1 MB EVO PRO 15	180 A	150 A	60%	0.6 - 1.0 mm
2 MB EVO PRO 25	230 A	200 A	60%	0.8 - 1.2 mm
3 MB EVO PRO 24	250 A	220 A	60%	0.8 - 1.2 mm
4 MB EVO PRO 26	270 A	240 A	60%	0.8 - 1.2 mm
5 MB EVO PRO 36	320 A	290 A	60%	0.8 - 1.2 mm

MB EVO PRO

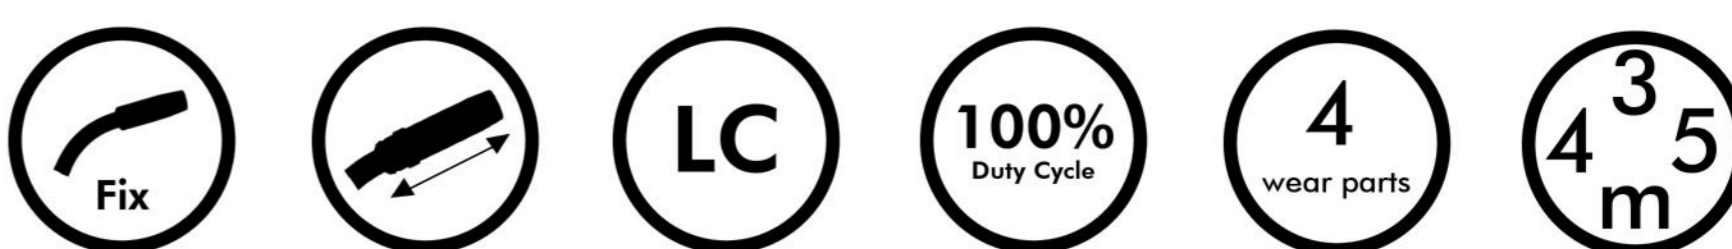

Torch complete Type	Rating CO2	Rating Mixed Gases	Duty cycle	Wire size
1 MB EVO PRO 240 D	325 A	300 A	100%	0.8 - 1.2 mm
2 MB EVO PRO 401 D / 401	450 A / 475 A	400 A / 425 A	100%	0.8 - 1.2 mm
3 MB EVO PRO 501 D / 501	550 A / 575 A	500 A / 525 A	100%	1.0 - 1.6 mm

ABIMIG Line

ABIMIG A




Torch complete Type	Rating CO2	Rating Mixed Gases	Duty cycle	Wire size
1 ABIMIG A 155 LW	190 A	170 A	60%	0.6 - 1.0 mm
2 ABIMIG A 255 LW	230 A	220 A	60%	0.8 - 1.2 mm
3 ABIMIG A 305 LW	280 A	255 A	60%	0.8 - 1.2 mm
4 ABIMIG A 355 LW	350 A	310 A	60%	1.0 - 1.6 mm
5 ABIMIG A 405 LW	400 A	355 A	60%	1.0 - 1.6 mm

ABIMIG W



Torch complete Type	Rating CO2	Rating Mixed Gases / Pulse	Duty cycle	Wire size
1 ABIMIG W 340	400 A	350 A / 350 A	100%	0.8 - 1.2 mm
2 ABIMIG W 440	500 A	450 A / 350 A	100%	0.8 - 1.6 mm
3 ABIMIG W 540	600 A	550 A / 400 A	100%	1.0 - 1.6 mm

ABIMIG AT

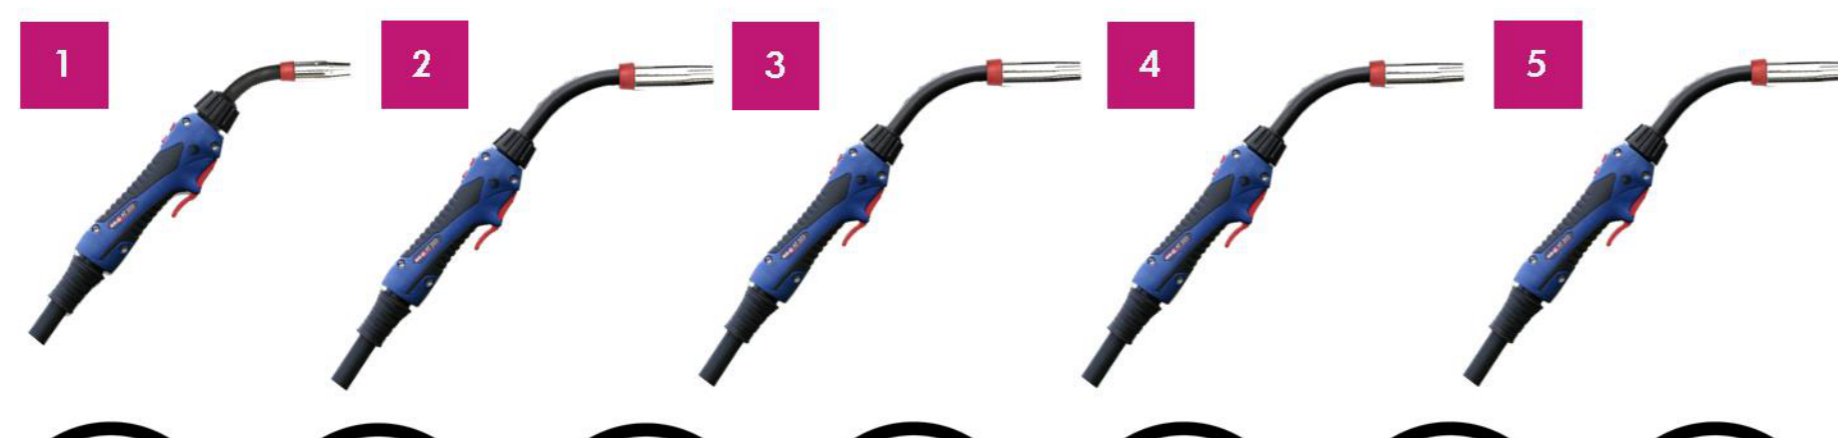

Torch complete Type	Rating CO2	Rating Mixed Gases	Duty cycle	Wire size
1 ABIMIG AT 155 LW	190 A	180 A	60%	0.8 - 1.0 mm
2 ABIMIG AT 255 LW	240 A	220 A	60%	0.8 - 1.2 mm
3 ABIMIG AT 305 LW	290 A	260 A	60%	0.8 - 1.2 mm
4 ABIMIG AT 355 LW	340 A	320 A	60%	1.0 - 1.6 mm
5 ABIMIG AT 405 LW	400 A	370 A	60%	1.0 - 1.6 mm

ABIMIG WT



Torch complete Type	Rating CO2	Rating Mixed Gases / Pulse	Duty cycle	Wire size
1 ABIMIG WT 340	400 A	350 A / 350 A	100%	0.8 - 1.2 mm
2 ABIMIG WT 440	500 A	450 A / 350 A	100%	0.8 - 1.6 mm
3 ABIMIG WT 540	600 A	550 A / 400 A	100%	1.0 - 1.6 mm

Spare Parts
 Spare Parts
 Air Cooled
 Liquid Cooled
 Dutycycle
 Dutycycle
 Rating
 Low Weight
 Torch Length
 Torch Neck Fixed
 Gas Nozzle Swivelable
 Gas Nozzle Swivelable
 Changeable, Turnable Torch Neck

