

_ TECHNICAL _ SPECIFICATIONS

Operating Frequency: 60 MHz (1.4 T)

Magnet: Permanent, no cryogens

User Interface: Built-in touchscreen or Windows, Mac or Linux

compatible

Nuclei: Dual-tuned: e.g., ¹H/¹³C, ¹H/³¹P, ¹H/¹⁹F, ¹H/¹¹B,

¹⁹F/⁷Li, please inquire for more

Lock: Deuterium & non-deuterium options **Sample:** Standard 5 mm NMR tubes, flow options

Compatibility: JCAMP-DX, Mnova, ACD/Labs, Delta, TopSpin,

LabView

Resolution & Lineshape: $LW(50\%) \le 1.0 \text{ Hz}$

Sensitivity: 100 : 1 (1% EtBz single scan)

Stray Field: 2 Gauss line contained within enclosure

Operating Temperature: 18-26 °C

Power Supply: 100-240 VAC, 50-60 Hz **Dimensions:** 11.8 x 11.0 x 19.2"

 $30 \times 28 \times 49 \text{ cm}$

Weight: 55 lbs/25 kg

For more information please visit:

www.nanalysis.com

Or contact us directly:








1.855.NMReady

sales@nanalysis.com

@nanalysis

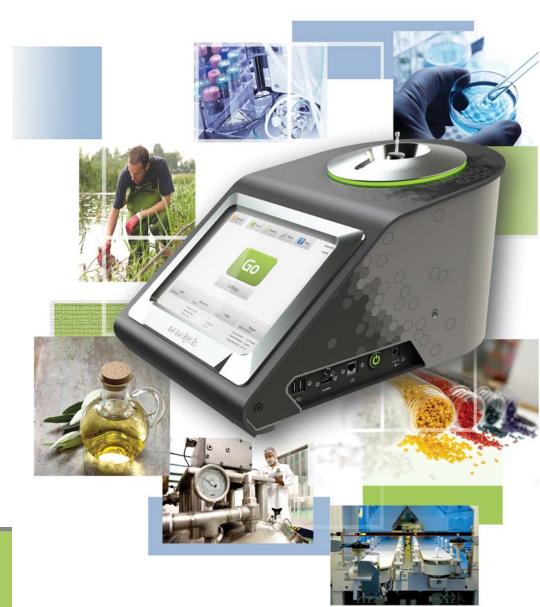

MReady-60PRO

High Performance Multinuclear Compact NMR Spectrometer





MULTINUCLEAR CAPABILITIES

Each NMReady-60PRO is a factory dual-tuned spectrometer. It can acquire spectra for two conventional spin active nuclei, thus enhancing its utility for characterizing a broad range of natural and synthetic complexes. Inquire for possible combinations of:

PULSE PROGRAMS

The NMReady-60PRO allows the user to load/customize pre-existing NMR experiments from a series of relaxation, 1D, homo- and hetero-nuclear 2D experiments, including, but not limited to:

✓ COSY **✓** JRES

✓TOCSY **✓**APT

✓ DEPT trio

✓ Solvent suppression

7.0 6.0 6.0 6.0 3.0 2.0 1.0 6.0 -1.0 ✓ Decoupling ✓ HSQC/HETCOR **✓** HMBC

Please inquire about experiment packages or our experiment designer.

Compact and Portable



W B

Energy Efficient



Conventional Sample Preparation



Low Maintenance



QUICK AND EASY-TO-USE

Improve workflow and increase research productivity with this revolutionary, high-performance 60 MHz NMR spectrometer that is easily incorporated into a laboratory management system.

Load, Customize or Design Experiments


Create Projects



With the optional kinetics module, a user can automatically collect multi-spectra data over a set time interval.

Reaction monitoring, speciation plots are elementary with straightforward, onboard software for manual integration cuts and plotting functions.

Data can also be easily saved, printed, exported and processed using third party processing software tools.



ACCESSIBLE & SECURE DATA

✓ Secure login

✓ Print

✓ Save Local LISB Ethernet netowrk

Wi-Fi network ✓ Process in 3rd party software with JCAMP-DX files

Configure

Acquire

Analyze

