

The MONOGYS 320-4CS is the ideal «synergistic» semi-automatic welding machine for light fabrication, maintenance and industrial production workshops. The 320 monogys can weld steel, stainless steel, aluminium and capable of using 1.2mm wires with its 320 amp output.

PRODUCT

In « Synergic » mode, setting is fast and simple.

The Micro processor controller will automatically set the optimum wire speed. This avoids complex set-up and ensures optimum welding parameters.

3 AVAILABLE FUNCTIONS

- **2T** : Trigger Mode
- **4T** : Trigger Mode, to weld during a long period without constantly pressing the trigger.
- **Spot timer** : tack/weld duration

2 FUNCTIONS : MANUAL OR SYNERGIC


- **Synergic function**: no need to adjust the wire speed.

Simply select:

- the wire type
- the wire \varnothing
- the power

MONOGYS 320-4CS sets the optimum wire speed for you. Save and activate the last welding settings (wire \varnothing , wire type, mode)

- **Manual function**
traditional adjustment of the wire speed.

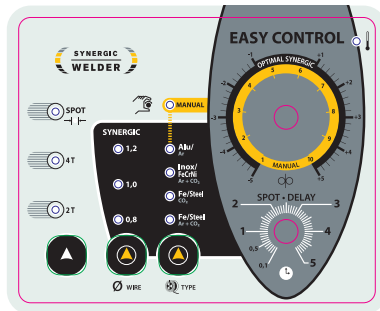

- Supplied without accessories (ref.

NO GAS WELDING

This process allows:

- **welding with cored wire** (requires polarity reversal).
- **outdoor welding**

MADE FOR INTENSIVE WORK

MONOGYS 320-4CS can accept \varnothing 200 or 300 mm wire reels. (5kg & 15KG)
It has 4 roll drive wire-feeder ideal for feeding of soft wires like aluminium and flux cored.



ACCESSORIES

Grip Torch 350A
 \varnothing 1,2 (4m)



Ref. 040946

Earth cable (4m)



Ref. 043817

50/60hz	-AM-	min▷max	Ømm		Ømm			Electronic Control	équipé d'origine / original equipment / originalausstattung / equipamiento de fabrica		EN60974-1 (40°C)		U ₀	cm/kg	Protected & compatible POWER GENERATOR (+/- 15%)
			GAS	NO GAS	100	200	300		IA (60%)	X% (I2 max)					
230V - 1~	50A	40-320A	0.8	0.9	-	✓	✓	⚡	0.9/1.2	-	240A	320A 25%	17V ▼ 43V	95x93x50 105 kg	13 kW
			1.2	1.2											