


## AXIS FA54 Main Unit

### High-performance multi-view surveillance with Forensic WDR

AXIS FA54 supports up to four AXIS FA Sensor Units, enabling cost-effective and highly discreet surveillance of four closely situated areas with one system. The main unit can stream full frame rate HDTV 1080p videos from four sensor units simultaneously using one IP address. Ideal for retail applications, AXIS FA54 also supports quad view streaming and has an HDMI™ port for connection to a surveillance or public view monitor. The unit uses Forensic WDR (wide dynamic range) that is tuned for motion. Axis Zipstream video compression technology reduces bandwidth and storage requirements.

- > Full frame rate HDTV 1080p streams from four sensor units
- > Forensic WDR
- > Quad view stream, Axis Zipstream and Corridor Format
- > HDMI output, two-way audio, I/Os, two microSD card slots, 12 V DC

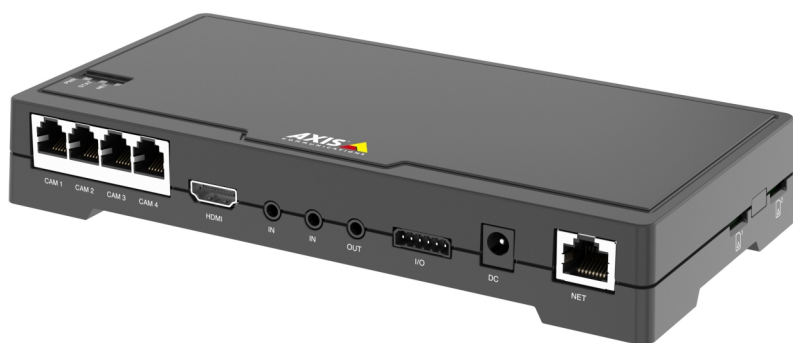

# AXIS FA54 Main Unit

<b>Video</b>		<b>Supported</b> Support for AXIS Camera Application Platform enabling installation of third-party applications, see <a href="http://axis.com/acap">axis.com/acap</a>
<b>Video compression</b>	H.264 (MPEG-4 Part 10/AVC) Baseline, Main and High Profiles Motion JPEG	
<b>Resolution</b>	1920x1080 (1080p) to 480x270	
<b>WDR</b>	Forensic WDR	
<b>Frame rate</b>	In 1080p: up to 25/30 fps (50/60 Hz)	
<b>Video streaming</b>	Multiple, individually configurable streams in H.264 and Motion JPEG Axis Zipstream technology in H.264 Controllable frame rate and bandwidth VBR/ABR/MBR H.264 Quad view, max 1080p resolution HDMI	
<b>HDMI output</b>	Single camera source Picture-in-picture Quad view Playlist: single camera sources, still images 1080p 30/25/24 fps (50/60 Hz) 720p 50/60 fps (50/60 Hz) 576p 50 fps (50/60 Hz) 480p 60 fps (50/60 Hz)	
<b>Image settings</b>	Compression, color, brightness, sharpness, contrast, white balance, exposure value, exposure control, exposure zones, local contrast, rotation, Corridor Format, text and image overlay, privacy mask, mirroring of images, Picture-in-picture, rotation in quad view	
<b>Audio</b>		
<b>Audio streaming</b>	Two-way, full-duplex and half-duplex	
<b>Audio encoding</b>	AAC-LC 8/16/32/48 kHz, max 128 kbit/s G.711 PCM 8 kHz 64 kbit/s G.726 ADPCM 8 kHz 32 kbit/s or 24 kbit/s Opus 8/16/48 kHz, max 128 kbit/s Configurable bit rate	
<b>Audio input/output</b>	External microphone input or line input, line output	
<b>Network</b>		
<b>Network protocols</b>	IPv4, IPv6 USGv6, ICMPv4/ICMPv6, HTTP, HTTP/2, HTTPS, TLS, QoS Layer 3 DiffServ, FTP, SFTP, CIFS/SMB, SMTP, mDNS (Bonjour), UPnP™, SNMPv1/v2c/v3 (MIB-II), DNS/DNSv6, DDNS, NTP, NTS, RTSP, RTP, TCP, UDP, IGMPv1/v2/v3, RTCP, ICMP, DHCPv4/v6, ARP, SSH, LLDP, CDP, MQTT v3.1.1, Secure syslog (RFC 3164/5424, UDP/TCP/TLS), Link-Local address (ZeroConf)	
<b>System integration</b>		
<b>Application Programming Interface</b>	Open API for software integration, including VAPIX® and AXIS Camera Application Platform; specifications at <a href="http://axis.com">axis.com</a> One-click cloud connection ONVIF® Profile G, ONVIF® Profile M, ONVIF® Profile S, and ONVIF® Profile T, specification at <a href="http://onvif.org">onvif.org</a>	
<b>Event triggers</b>	Analytics, external inputs Edge storage events MQTT subscribe	
<b>Event actions</b>	File upload: email, FTP, HTTP, HTTPS, network share MQTT publish Notification: email, HTTP, HTTPS and TCP Pre- and post-alarm video buffering Video and audio recording to edge storage, play audio clip, external output activation	
<b>Built-in installation aids</b>	Pixel counter	
<b>Data streaming</b>	Event data	
<b>Analytics</b>		
<b>Applications</b>	<b>Included</b> AXIS Motion Guard, AXIS Fence Guard, AXIS Loitering Guard AXIS Video Motion Detection Active tampering alarm, audio detection	
<b>Cybersecurity</b>		
<b>Edge security</b>	<b>Software:</b> Signed firmware, brute force delay protection, digest authentication, password protection	
<b>Network security</b>	IEEE 802.1X (EAP-TLS), HTTPS/HSTS, TLS v1.2/v1.3, Network Time Security (NTS), X.509 Certificate PKI, IP address filtering	
<b>Documentation</b>	<i>AXIS OS Hardening Guide</i> <i>Axis Vulnerability Management Policy</i> <i>Axis Security Development Model</i> AXIS OS Software Bill of Material (SBOM) To download documents, go to <a href="http://axis.com/support/cybersecurity/resources">axis.com/support/cybersecurity/resources</a> To read more about Axis cybersecurity support, go to <a href="http://axis.com/cybersecurity">axis.com/cybersecurity</a>	
<b>General</b>		
<b>Casing</b>	Aluminum Plastic	
<b>Sustainability</b>	PVC-free	
<b>Memory</b>	1024 MB RAM, 512 MB Flash	
<b>Power</b>	12 V DC, typical 14 W, max 30 W	
<b>Connectors</b>	RJ45 10BASE-T/100BASE-TX/1000BASE-T RJ12 for sensor units 6-pin terminal block for four configurable inputs/outputs (12 V DC output), max load 50 mA Two 3.5 mm mic/line in, 3.5 mm line out DC connector for 12 V DC input HDMI type A	
<b>Storage</b>	Support for microSD/microSDHC/microSDXC card Support for SD card encryption (AES-XTS-Plain64 256bit) Recording to network-attached storage (NAS) For SD card and NAS recommendations see <a href="http://axis.com">axis.com</a>	
<b>Operating conditions</b>	0 °C to 45 °C (32 °F to 113 °F) Humidity 10-85% RH (non-condensing)	
<b>Storage conditions</b>	-40 °C to 65 °C (-40 °F to 149 °F) Humidity 5-95% RH (non-condensing)	
<b>Approvals</b>	<b>EMC</b> a55032 Class A, EN 61000-3-2, EN 61000-3-3, EN 55024, EN 61000-6-1, EN 61000-6-2, FCC Part 15 Subpart B Class A, VCCI Class A, RCM AS/NZS CISPR 32 Class A, ICES-003 Class A, KCC KN32 Class A, KN35 <b>Safety</b> IEC/EN/UL 62368-1, IS 13252 <b>Environment</b> EN 50581, IEC 60529 IP3X, IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-14, IEC 60068-2-78, IEC 60068-2-6, IEC 60068-2-27 <b>Network</b> NIST SP500-267	
<b>Dimensions</b>	202 x 102 x 31 mm (7 15/16 x 4 x 1 1/4 in)	
<b>Weight</b>	442 g (0.98 lb)	
<b>Included accessories</b>	Installation Guide, Windows® decoder 1-user license, power supply Rubber feet, mounting brackets	
<b>Optional accessories</b>	AXIS F7315 Cable White 15 m For more accessories, see <a href="http://axis.com">axis.com</a>	
<b>Video management software</b>	AXIS Companion, AXIS Camera Station, video management software from Axis' Application Development Partners available at <a href="http://axis.com/vms">axis.com/vms</a>	
<b>Languages</b>	English, German, French, Spanish, Italian, Russian, Simplified Chinese, Japanese, Korean, Portuguese, Traditional Chinese, Dutch, Czech, Swedish, Finnish, Turkish, Thai, Vietnamese	
<b>Warranty</b>	5-year warranty, see <a href="http://axis.com/warranty">axis.com/warranty</a>	